



Features

- DALI-2 DT6(Dimming) or DT8 (Tunable white/RGBW) control available
- Constant voltage PWM style output with 1 to 4 channels
- Standby power consumption <0.5W
- Flicker free, complying with CE ErP directive
- Plastic housing with class II and PFC design
- Function options: 3 in 1 dimming/DALI-2+PUSH Dimming
- Minimum dimming level 0.1%(DALI-2)
- Cooled by free air convection
- 5 years warranty

Applications

- LED strip lighting(CW/WW/Tunable/RGBW)
- LED decorative lighting
- LED architecture lighting
- Household lighting control system
- DALI Building automation

GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

SPWM-75 series is a 75W AC/DC LED driver featuring the constant voltage mode with PWM style output, which is able to maintain the color temperature and the brightness homogeneity when driving all kinds of LED strips. SPWM-75 operates from 100~305VAC and offers models with different rated voltage ranging include 12V and 24V. Thanks to the high efficiency up to 90%,with the fanless design,the entire series is able to operate for -20~+90°C case temperature under free air convection.SPWM-75 is equipped with various function options, such as dimming methodologies with DALI-2, so as to provide the optimal design flexibility for LED lighting system.

Model Encoding

SPWM - 75 - 24

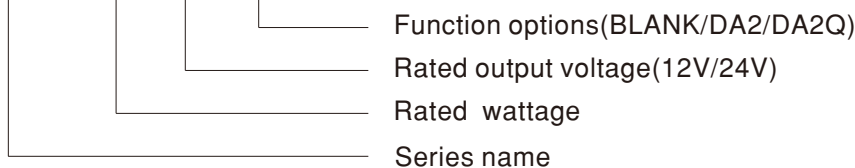

| Type | Function | Note |
|-------|---|----------|
| BLANK | 3 in 1 dimming function (0~10Vdc,10V PWM signal and resistance) | In stock |
| DA2 | DALI-2 with DT6 control(1 channel output) | In stock |
| DA2Q | DALI-2 with DT8 control(4 channels output) | In stock |


| SPECIFICATION | | SPWM-75-12 □ | SPWM-75-24 □ |
|---|--------------------------------|--|---|
| OUTPUT | | | |
| DC VOLTAGE | | 12V | 24V |
| RATED CURRENT(Max.) | | 6.3A | 3.2A |
| RATED POWER(Max.) | | 75.6W | 76.8W |
| VOLTAGE ADJ. RANGE | | 11~14V | 23~26V |
| PWM FREQUENCY (Typ.) | | 3.2kHz | |
| SETUP, RISE TIME Note.3 | | 500ms,80ms/ 230VAC ,1200ms,80ms/115VAC | |
| HOLD UP TIME (Typ.) | | 10ms/230VAC or 115VAC | |
| INPUT | | | |
| VOLTAGE RANGE Note.2 | | 100 ~ 305VAC 156 ~ 410VDC (Please refer to "STATIC CHARACTERISTIC" section) | |
| FREQUENCY RANGE | | 47 ~ 63Hz | |
| POWER FACTOR (Typ.) | | PF>0.97/115VAC, PF>0.95/230VAC, PF>0.92/277VAC @ full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section) | |
| TOTAL HARMONIC DISTORTION | | THD<10%@load≥50%/115VAC, 230VAC; @load≥75%/277VAC (Please refer to "TOTAL HARMONIC DISTORTION" section) | |
| EFFICIENCY (Typ.) | | 89% | 90% |
| AC CURRENT (Typ.) | | 0.9A / 115VAC 0.45A / 230VAC 0.38A / 277VAC | |
| INRUSH CURRENT (Typ.) | | COLD START 50A(twidth=500μs measured at 50% Ipeak) at 230VAC; Per NEMA 410 | |
| MAX. NO. of PSUs on 16A CIRCUIT BREAKER | | 5 units (circuit breaker of type B) / 8 units (circuit breaker of type C) at 230VAC | |
| LEAKAGE CURRENT | | <0.25mA / 277VAC | |
| STANDBY POWER CONSUMPTION | | standby power consumption<0.5W (Dimming off) | |
| PROTECTION | | | |
| OVERLOAD | | 105~135%, hiccup mode, recovers automatically after fault condition is removed | |
| SHORT CIRCUIT | | Blank type: Shut down O/P voltage, re-power on to recover after fault condition is removed DA2/DA2Q type:Hiccup mode, recovers automatically after fault condition is removed | |
| OVER VOLTAGE | | 15 ~ 20V | 27~ 36V |
| | | Shut down O/P voltage, re-power on to recover after fault condition is removed | |
| OVER TEMPERATURE | | Shut down O/P voltage, re-power on to recover after fault condition is removed | |
| ENVIRONMENT | | | |
| WORKING TEMP. | | Tcase=-20~+90°C (Please refer to " OUTPUT LOAD vs TEMPERATURE" section) | |
| MAX. CASE TEMP. | | Tcase=90°C | |
| WORKING HUMIDITY | | 20 ~ 95% RH non-condensing | |
| STORAGE TEMP., HUMIDITY | | -40 ~ +80°C, 10 ~ 95% RH | |
| TEMP. COEFFICIENT | | ±0.03%/°C (0 ~ 50°C) | |
| VIBRATION | | 5 ~ 100Hz, 2G 12min./1cycle, period for 72min. each along X,Y,Z axes | |
| SAFETY & EMC | | | |
| SAFETY STANDARDS | | UL8750(Class P), CSA C22.2 No.250.13-12; ENEC BS EN/EN61347-1, BS EN/EN61347-2-13(EL) appendix J suitable for emergency installations(DC input 176-280VDC), BS EN/EN62384; GB/T19510.1,GB/T19510.213; EAC TP TC 004; Design refer to AS/NZS 61347-1, AS/NZS 61347-2-13 | |
| DALI STANDARDS | | Comply with IEC62386-101, 102, 207(DT6),209(DT8),DALI Part 251 | |
| WITHSTAND VOLTAGE | | I/P-O/P:3.75KVAC | |
| ISOLATION RESISTANCE | | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH | |
| EMC EMISSION Note.4 | Parameter | Standard | Test Level/Note |
| | Conducted | BS EN/EN55015(CISPR15) ,GB/T17743 | ----- |
| | Radiated | BS EN/EN55015(CISPR15) ,GB/T17743 | ----- |
| | Harmonic Current | BS EN/EN61000-3-2 ,GB 17625.1 | Class C @load≥50% |
| | Voltage Flicker | BS EN/EN61000-3-3 | ----- |
| EMC IMMUNITY | BS EN/EN61547 | | |
| | Parameter | Standard | Test Level/Note |
| | ESD | BS EN/EN61000-4-2 | Level 3, 8KV air ; Level 2, 4KV contact |
| | Radiated | BS EN/EN61000-4-3 | Level 2 |
| | EFT/Burst | BS EN/EN61000-4-4 | Level 2 |
| | Surge | BS EN/EN61000-4-5 | Level 4, 2KV/Line-Line |
| | Conducted | BS EN/EN61000-4-6 | Level 2 |
| | Magnetic Field | BS EN/EN61000-4-8 | Level 2 |
| | Voltage Dips and Interruptions | BS EN/EN61000-4-11:2020 | 30% dip 10 periods 100% interruption 0.5 periods |
| OTHERS | | | |
| FLICKER Note.9 | | PstLM ≤ 1, SVM ≤ 0.4 | |
| MTBF | | 2396.9 K hrs min. Telcordia SR-332 (Bellcore) ; 205.7 K hrs min. MIL-HDBK-217F (25°C) | |
| DIMENSION | | 290*38*28.5mm (L*W*H) | |
| PACKING | | 0.31Kg; 42 pcs/ 13.8 Kg/ 0.67 CUFT | |

NOTE

- All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.
- De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (⊙) point (or TMP, per DLC), is about 75°C or less.
- Please refer to the warranty statement on MEAN WELL's website at <http://www.meanwell.com>
- The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- It is not recommended to connect to capacitive loads.
- Flicker is measured at full load with the light source provided by MEAN WELL.
- RCM is on a voluntary basis. Non IC classification Independent LED control gear is not suitable for residential installations.
- Based on IEC 62368-101/102 DALI power on timing and interruption regulations, the set up time needs to test with a DALI controller which can support for DALI power on function, otherwise the set up time will be higher than 0.5 seconds for the DA2 type

※ Product Liability Disclaimer : For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx> File Name:SPWM-75-SPEC 2026-01-12


Block Diagram

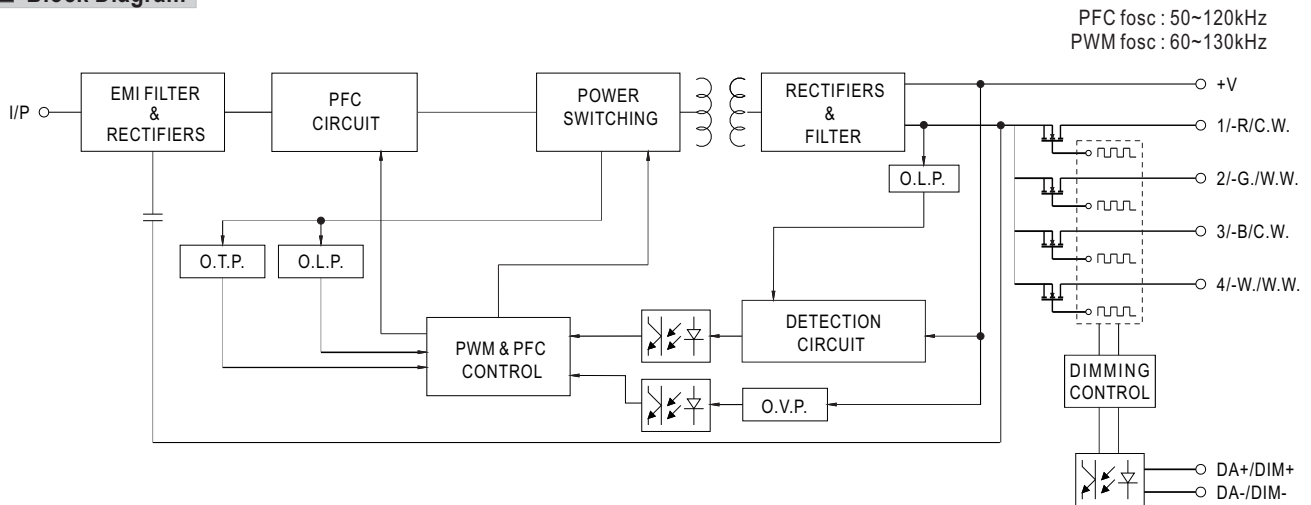

DIMMING OPERATION

※ Dimming principle for PWM style output(1 channel output, for BLANK/DA2 Type)


- Dimming is achieved by varying the duty cycle of the output current.

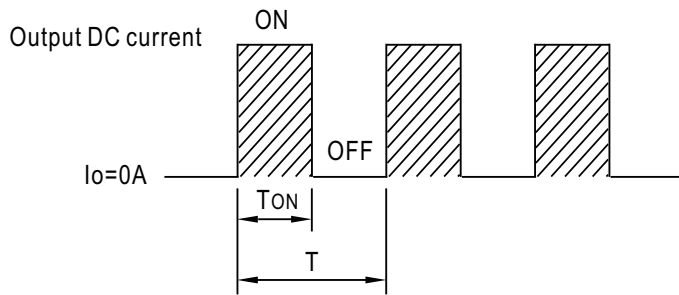

$$\text{Duty cycle(\%)} = \frac{T_{ON}}{T} \times 100\%$$

Output PWM frequency : 3.2kHz fixed

※ Dimming principle for colour temperature dimming and brightness dimming(4 channels output, for DA2Q Type)

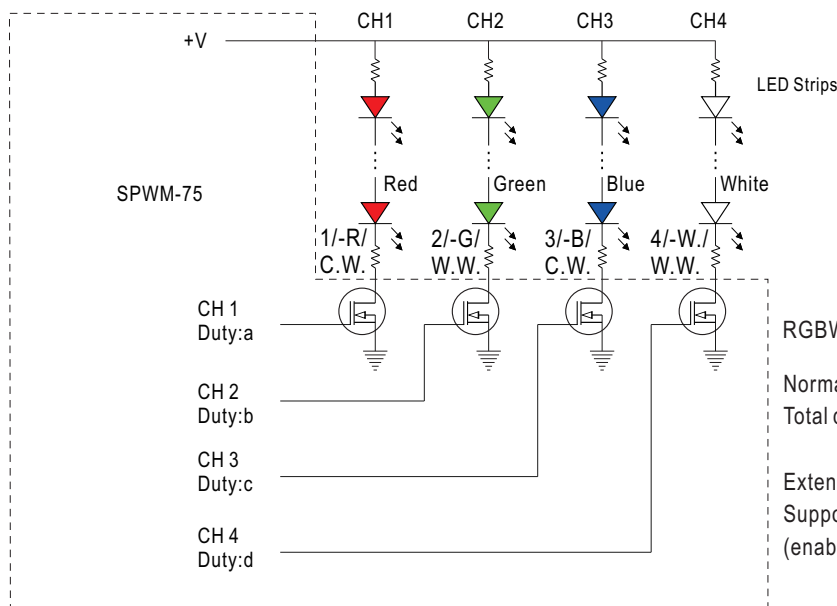

RGBW Mode:



Normalised colour control(Factory default):
Total duty cycle = a + b + c + d ≤ 100%.

Extended Colour Control mode:
Supports a + b + c + d ≤ 400%
(enabled via DALI commands).



※ 3 in 1 dimming function

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100 μ A (typ.)



◎ Applying additive 0 ~ 10VDC

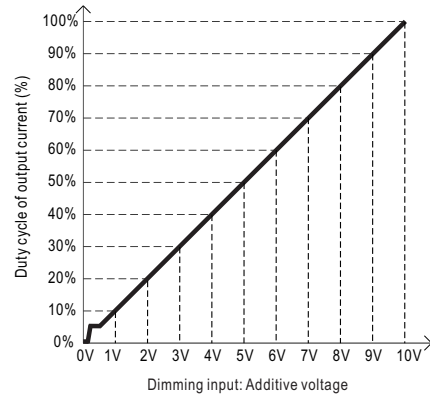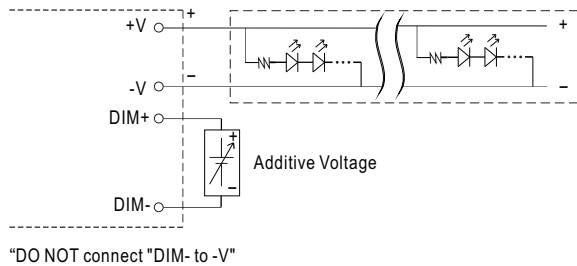

◎ Applying additive 10V PWM signal (frequency range 300Hz~3KHz):

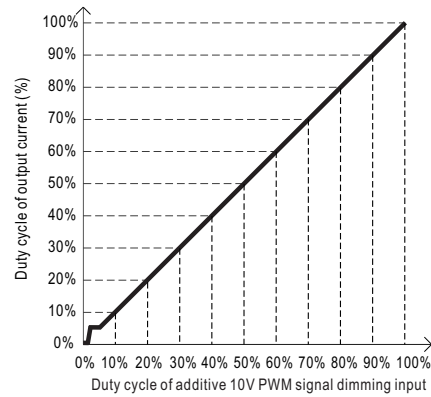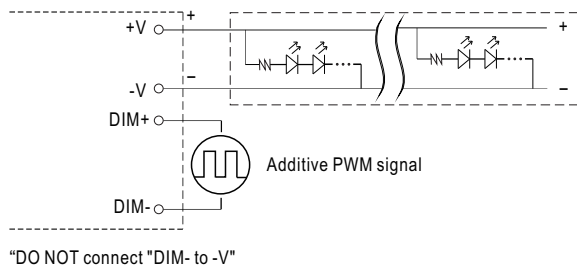

◎ Applying additive resistance: 0~100k Ω

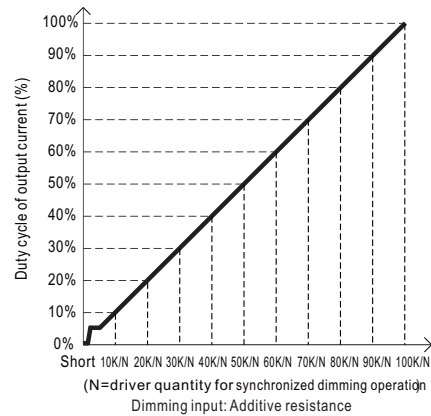
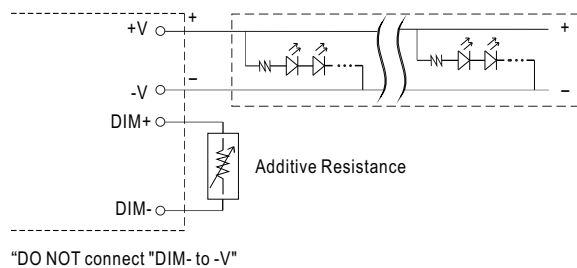


Note : 1. Min. dimming level is about 6% and the output current is not defined when $0\% < I_{out} < 6\%$.

2. The output current could drop down to 0% when dimming input is about 0k Ω or 0Vdc, or 10V PWM signal with 0% duty cycle.

※PUSH dimming (primary side), for DA2/DA2Q Model

- Input wiring diagram

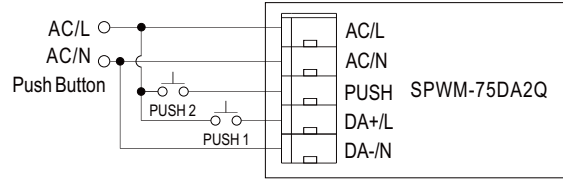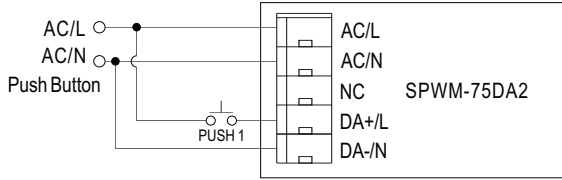

- The factory default dimming level is at 100%.
- Up to 10 drivers can perform the PUSH dimming at the same time when utilizing one common push button.
- The maximum length of the cable from the push button to the last driver is 20 meters.

| Action | Action duration |
|------------|-----------------|
| Short Push | 0.1~1s |
| Long Push | >1s |

Push Button functionality



| Model | Application | Dip Switch | | | Push 1 for brightness | Push 2 for colour |
|-----------|--|------------|-----|-----|---|---|
| | | 1 | 2 | 3 | | |
| DA2 Type | 1 logic unit of LED (DT6, Brightness Dimming) | | | | Short Push : ON/OFF Long Push : Dim up/down. - dim up stop at maximum; dim down stop at minimum dim (not dim off) - with next push, direction change(up/down) - dim up possible even if when unit is OFF | This model does not feature this button. |
| DA2Q Type | 1 logic unit of LED (DT6, Brightness Dimming) | ON | ON | ON | Short Push : ON/OFF Long Push : Dim up/down. - dim up stop at maximum; dim down stop at minimum dim (not dim off) - with next push, direction change(up/down) - dim up possible even if when unit is OFF | Short Push : no response Long Push : no response |
| | 4 logic unit of LED (DT6, Brightness Dimming) | ON | ON | OFF | 4 control gears are synchronously controlled Short Push : ON/OFF Long Push : Dim up/down. - dim up stop at maximum; dim down stop at minimum dim (not dim off) - with next push, direction change(up/down) - dim up possible even if when unit is OFF | Short Push : no response Long Push : no response |
| | 1 logic unit of colourtype RGBW (DT8, RGBW colour control) (factory default) | OFF | OFF | OFF | Short Push : ON/OFF Long Push : Dim up/down. - dim up stop at maximum; dim down stop at minimum dim (not dim off) - with next push, direction change(up/down) - dim up possible even if when unit is OFF | Short Push : Switch to "W channel control" or "RGB color control". Long Push : Dimming "W channel control" or "RGB color control". -W channel control: Long press to dim up stop at maximum. Long press to dim down stop at minimum(0). -RGB color control: Long press to change RGB color. |
| | 1 logic unit of colour type Tc (DT8, Tunable white control) | ON | OFF | OFF | Short Push : ON/OFF Long Push : Dim up/down - dim up stop at maximum; dim down stop at minimum dim (not dim off) - with next push, direction change(up/down) - dim up possible even if when unit is OFF | Short Push : ON/OFF Long Push : Dim2Warm - The color temperature warms up while the brightness dims, and the color temperature cools down while the brightness brightens. - dim up stop at maximum; dim down stop at minimum dim (not dim off) - with next push, direction change (up, cooler/down, warmer) - dim up possible even if when unit is OFF |

| Model | | Dip Switch | | | PUSH 1 for brightness | PUSH 2 for colour |
|-----------|--|------------|-----|-----|--|--|
| | | 1 | 2 | 3 | | |
| DA2Q Type | 2 logic units of colour type Tc (DT8, Tunable white control) | OFF | ON | OFF | 2 control gears are synchronously controlled Short Push : ON/OFF Long Push : Dim up/down - dim up stop at maximum; dim down stop at minimum dim (not dim off) - with next push, direction change(up/down) - dim up possible even if when unit is OFF | 2 control gears are synchronously controlled Short Push : ON/OFF Long Push : Dim2Warm - The color temperature warms up while the brightness dims, and the color temperature cools down while the brightness brightens. - dim up stop at maximum; dim down stop at minimum dim (not dim off) - with next push, direction change (up,cooler/down,warmer) - dim up possible even if when unit is OFF |
| | 2 logic units (1 logic unit of DT6) (1 logic unit of colour type Tc) | OFF | OFF | ON | Only the DT6 device responds Short Push : ON/OFF Long Push : Dim up/down - dim up stop at maximum; dim down stop at minimum dim (not dim off) - with next push, direction change(up/down) - dim up possible even if when unit is OFF | Only the DT8 device responds Short Push : ON/OFF Long Push : Dim2Warm - The color temperature warms up while the brightness dims, and the color temperature cools down while the brightness brightens. - dim up stop at maximum; dim down stop at minimum dim (not dim off) - with next push, direction change (up,cooler/down,warmer) - dim up possible even if when unit is OFF |


※ DALI interface(4 channels output, for DA2Q Model)

| Dip Switch | | | Application | Output channels | Output connections schematic diagram | | | | | | | | | | | | |
|-----------------|---------------|---------------|---|---|--|-----------------|--|--|--|--|--|---------------|---------------|---------------|---------------|----|----|
| 1 | 2 | 3 | | | | | | | | | | | | | | | |
| ON | ON | ON | 1 logic unit of LED (DT6, Brightness Dimming) | 1 logical control gear 1 DALI address | <table border="1"> <tr><th colspan="6">Output Terminal</th></tr> <tr> <td>4/-W/ W.W.</td> <td>3/-B/ C.W.</td> <td>2/-G/ W.W.</td> <td>1/-R/ C.W.</td> <td>+V</td> <td>+V</td> </tr> </table> | Output Terminal | | | | | | 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V |
| Output Terminal | | | | | | | | | | | | | | | | | |
| 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V | | | | | | | | | | | | |
| ON | ON | OFF | 4 logic units of LED (DT6, Brightness Dimming) | 4 logical control gears 4 DALI addresses | <table border="1"> <tr><th colspan="6">Output Terminal</th></tr> <tr> <td>4/-W/ W.W.</td> <td>3/-B/ C.W.</td> <td>2/-G/ W.W.</td> <td>1/-R/ C.W.</td> <td>+V</td> <td>+V</td> </tr> </table> | Output Terminal | | | | | | 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V |
| Output Terminal | | | | | | | | | | | | | | | | | |
| 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V | | | | | | | | | | | | |
| OFF | OFF | OFF | 1 logic unit of colour type RGBW (DT8, RGBW colour control) (factory default) | 1 logical control gear 1 DALI address | <table border="1"> <tr><th colspan="6">Output Terminal</th></tr> <tr> <td>4/-W/ W.W.</td> <td>3/-B/ C.W.</td> <td>2/-G/ W.W.</td> <td>1/-R/ C.W.</td> <td>+V</td> <td>+V</td> </tr> </table> | Output Terminal | | | | | | 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V |
| Output Terminal | | | | | | | | | | | | | | | | | |
| 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V | | | | | | | | | | | | |
| ON | OFF | OFF | 1 logic unit of colour type Tc (DT8, Tunable white control) | 1 logical control gear 1 DALI address | <table border="1"> <tr><th colspan="6">Output Terminal</th></tr> <tr> <td>4/-W/ W.W.</td> <td>3/-B/ C.W.</td> <td>2/-G/ W.W.</td> <td>1/-R/ C.W.</td> <td>+V</td> <td>+V</td> </tr> </table> | Output Terminal | | | | | | 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V |
| Output Terminal | | | | | | | | | | | | | | | | | |
| 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V | | | | | | | | | | | | |
| OFF | ON | OFF | 2 logic units of colour type Tc (DT8, Tunable white control) | 2 logical control gears 2 DALI addresses | <table border="1"> <tr><th colspan="6">Output Terminal</th></tr> <tr> <td>4/-W/ W.W.</td> <td>3/-B/ C.W.</td> <td>2/-G/ W.W.</td> <td>1/-R/ C.W.</td> <td>+V</td> <td>+V</td> </tr> </table> | Output Terminal | | | | | | 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V |
| Output Terminal | | | | | | | | | | | | | | | | | |
| 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V | | | | | | | | | | | | |
| OFF | OFF | ON | 2 logic units (1 logic unit of DT6) (1 logic unit of colour type Tc) | 2 logical control gears 2 DALI addresses | <table border="1"> <tr><th colspan="6">Output Terminal</th></tr> <tr> <td>4/-W/ W.W.</td> <td>3/-B/ C.W.</td> <td>2/-G/ W.W.</td> <td>1/-R/ C.W.</td> <td>+V</td> <td>+V</td> </tr> </table> | Output Terminal | | | | | | 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V |
| Output Terminal | | | | | | | | | | | | | | | | | |
| 4/-W/ W.W. | 3/-B/ C.W. | 2/-G/ W.W. | 1/-R/ C.W. | +V | +V | | | | | | | | | | | | |

OUTPUT LOAD vs TEMPERATURE

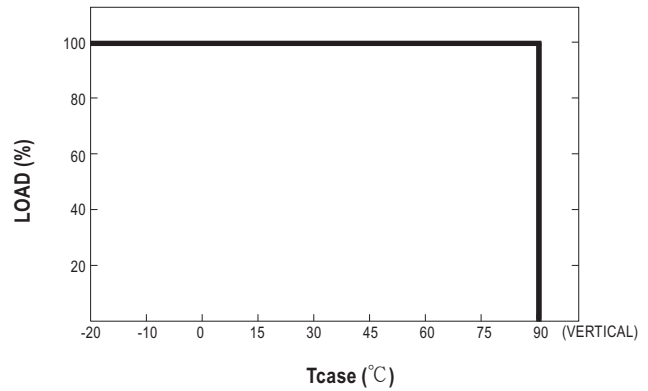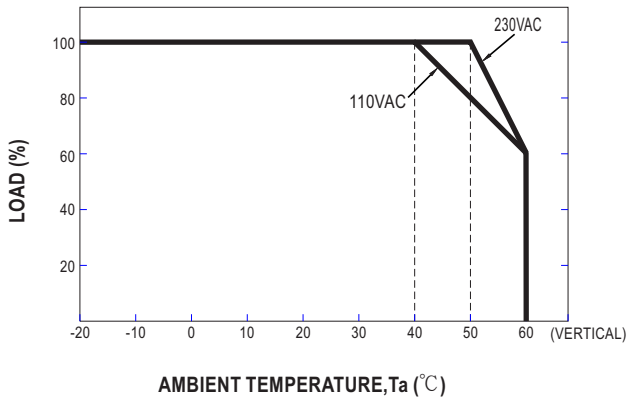


STATIC CHARACTERISTICS

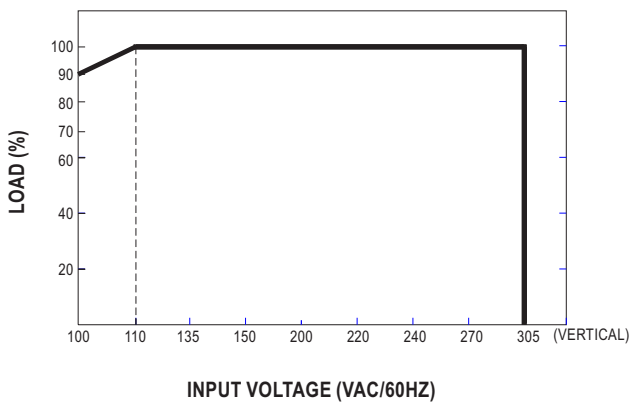


TOTAL HARMONIC DISTORTION (THD)

※ 24V Model, T_{case} at 70°C

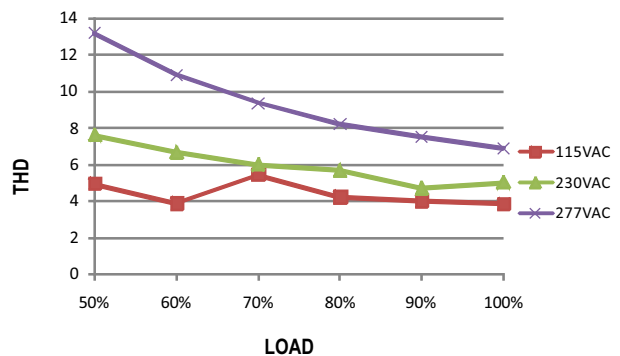

POWER FACTOR (PF) CHARACTERISTIC


※ T_{case} at 70°C

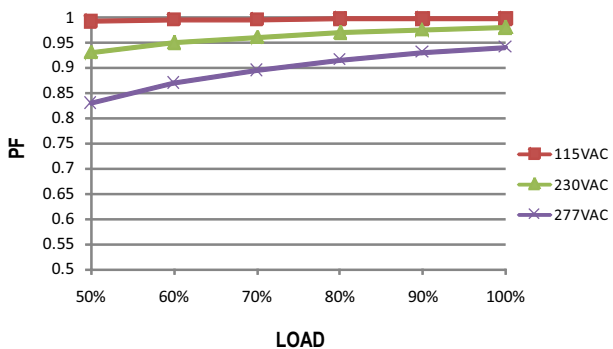


EFFICIENCY vs LOAD

SPWM-75 series possess superior working efficiency that up to 90% can be reached in field applications.

※ 24V Model, T_{case} at 70°C

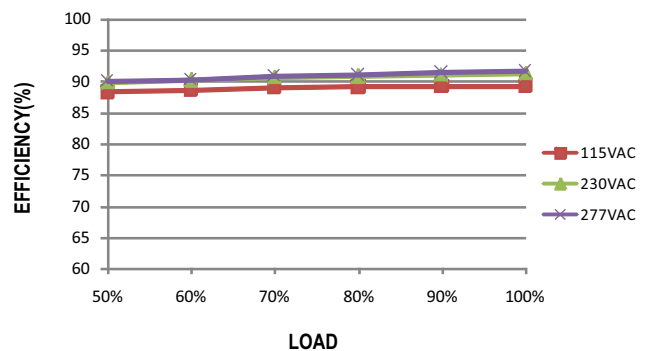


LIFE TIME

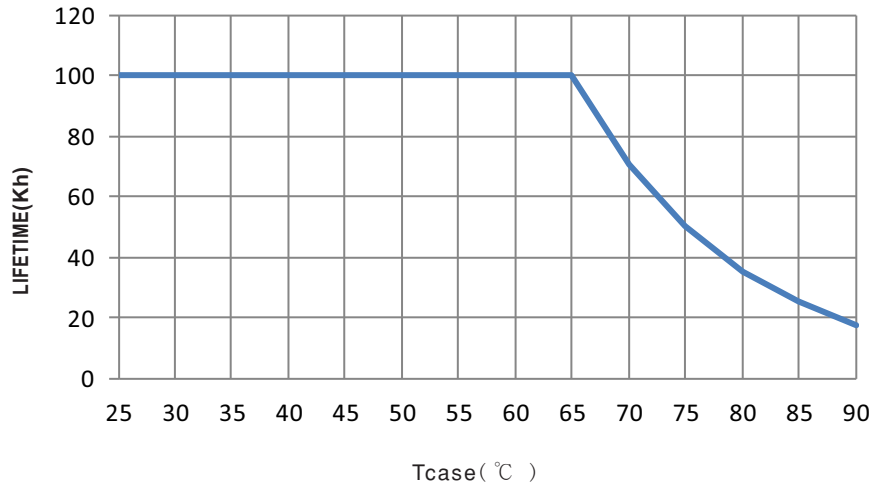

Mechanical Specification

Case No. SPWM-75 Unit:mm Tolerance:±1


※ BLANK-Type

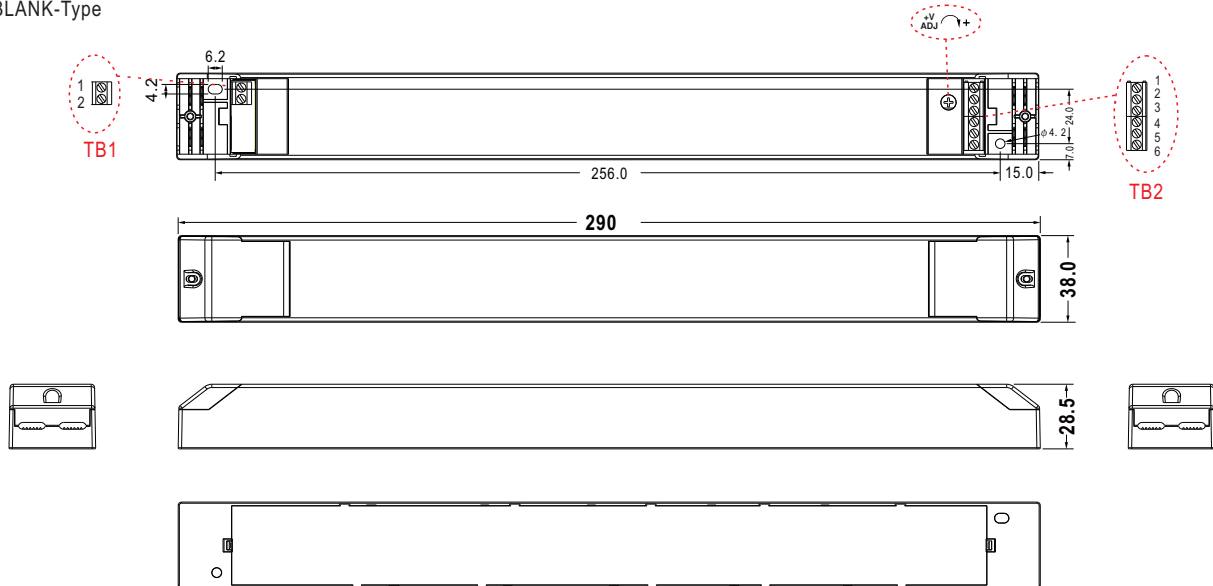

Terminal Pin No. Assignment (TB1):

| Pin No. | Assignment |
|---------|------------|
| 1 | AC/L |
| 2 | AC/N |


TB1 wiring:




Terminal Pin No. Assignment (TB2):

| Pin No. | Assignment |
|---------|------------|
| 1 | +V |
| 2 | +V |
| 3 | -V |
| 4 | -V |
| 5 | DIM+ |
| 6 | DIM- |

TB2 wiring:




※ DA2-Type

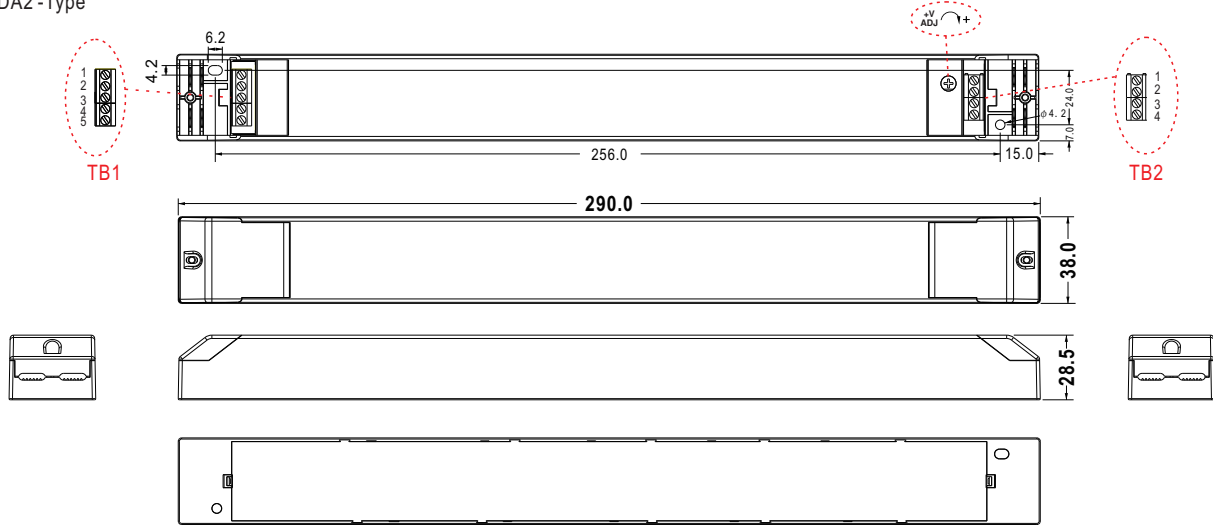

Terminal Pin No. Assignment (TB1):

| Pin No. | Assignment |
|---------|------------|
| 1 | AC/L |
| 2 | AC/N |
| 3 | NC |
| 4 | DA+/PUSH |
| 5 | DA-/N |


TB1 wiring:




Terminal Pin No. Assignment (TB2):

| Pin No. | Assignment |
|---------|------------|
| 1 | +V |
| 2 | +V |
| 3 | -V |
| 4 | -V |

TB2 wiring:




※ DA2Q-Type

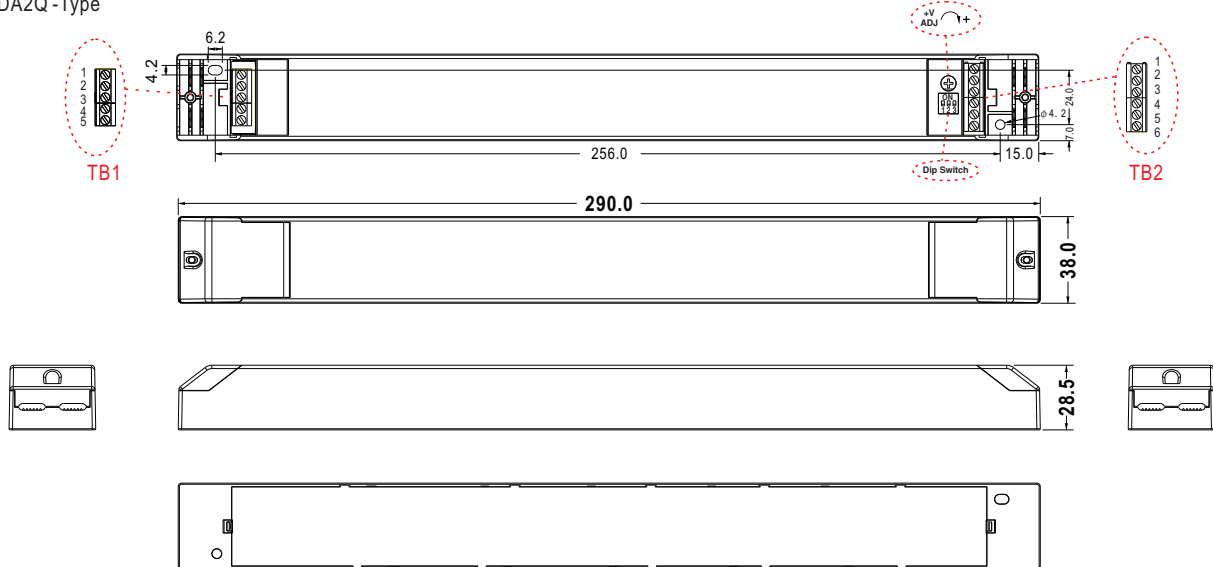

Terminal Pin No. Assignment (TB1):

| Pin No. | Assignment |
|---------|------------|
| 1 | AC/L |
| 2 | AC/N |
| 3 | PUSH/L |
| 4 | DA+/L |
| 5 | DA-/N |


TB1 wiring:



Terminal Pin No. Assignment (TB2):

| Pin No. | Assignment |
|---------|------------|
| 1 | +V |
| 2 | +V |
| 3 | 1/-R/C.W. |
| 4 | 2/-G/W.W. |
| 5 | 3/-B/C.W. |
| 6 | 4/-W/W.W. |

TB2 wiring:



■ INSTALLATION MANUAL

Please refer to : <http://www.meanwell.com/manual.html>