



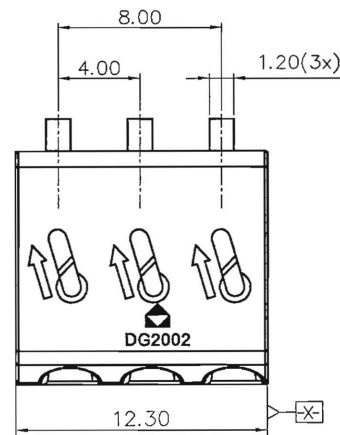


REVISION RECORD


REV	ECN	DESCRIPTION	DRFT	DATE
△	17-0318	Design Modify	Xin	2017.12.25

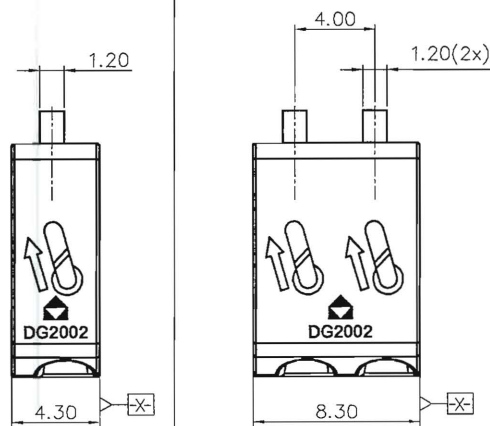


01P

02P

03P

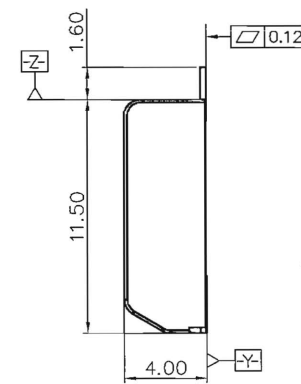

02P/03P

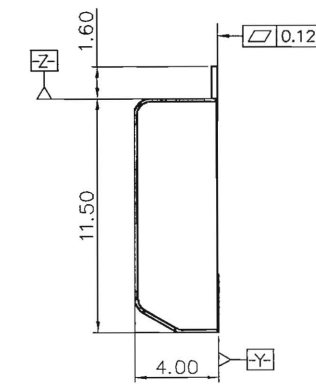

01P

DG2002 - 4.0 - XXP - 1Y - 100A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
 3.(Black)
 5.(Orange)

NOTES1:

UL Standard

1.Rated Voltage/Current : 600V/9A(01P)
300V/9A(02P/03P)

2.Wire Range : 24~18AWG

IEC Standard

1.

Pollution degree	3	2	2
Overtoltage category	III	III	II
Rate impulse voltage(KV)	4.0KV	4.0KV	4.0KV
Rate voltage(V)	32V	160V	160V
Rate current(A)	9A		

2.Wire Range : 0.2~0.75mm²

NOTES2:

1.Dimension shall be interpreted per

ASME Y14.5-2009

2.Pitch : 4.00mm, Poles : N=01~03P

3.Stripping length : 9mm

4.Operating temperature: -40°C~+130°C

5.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm							
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	0.1/10		
	TO 10	TO 24		TO 60	TO 100	TO 150			
±0.15		±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
△	17-0318	Design Modify	Xin	2017.12.25

4.90

8.00

24.00

11.50

15.50

LABEL

REELING DIRECTION

70PCS

1500PCS

70PCS

(100MM MIN)

WITHOUT CHARGE

WITH CHARGE

WITHOUT CHARGE

ø330

PART NO.:

/



宁波高松电子有限公司

NINGBO DEGSON ELECTRICAL CO., LTD

APPD:

Xin 2017.12.26

NAME:

DG2002-4.0-XXP-1Y-100A(H)

CHKD:

Xin 2017.12.27

DRFT:

WL 05/14/16"

TITLE: CUSTOMER DRAWING

REV

T1

DRAWING NO.: DG2002-4.0-C06

SHEET

2/4

THIRD ANGLE PROJECTION

MM
(INCH)

DO NOT SCALE DRAWING

SCALE

1:1