


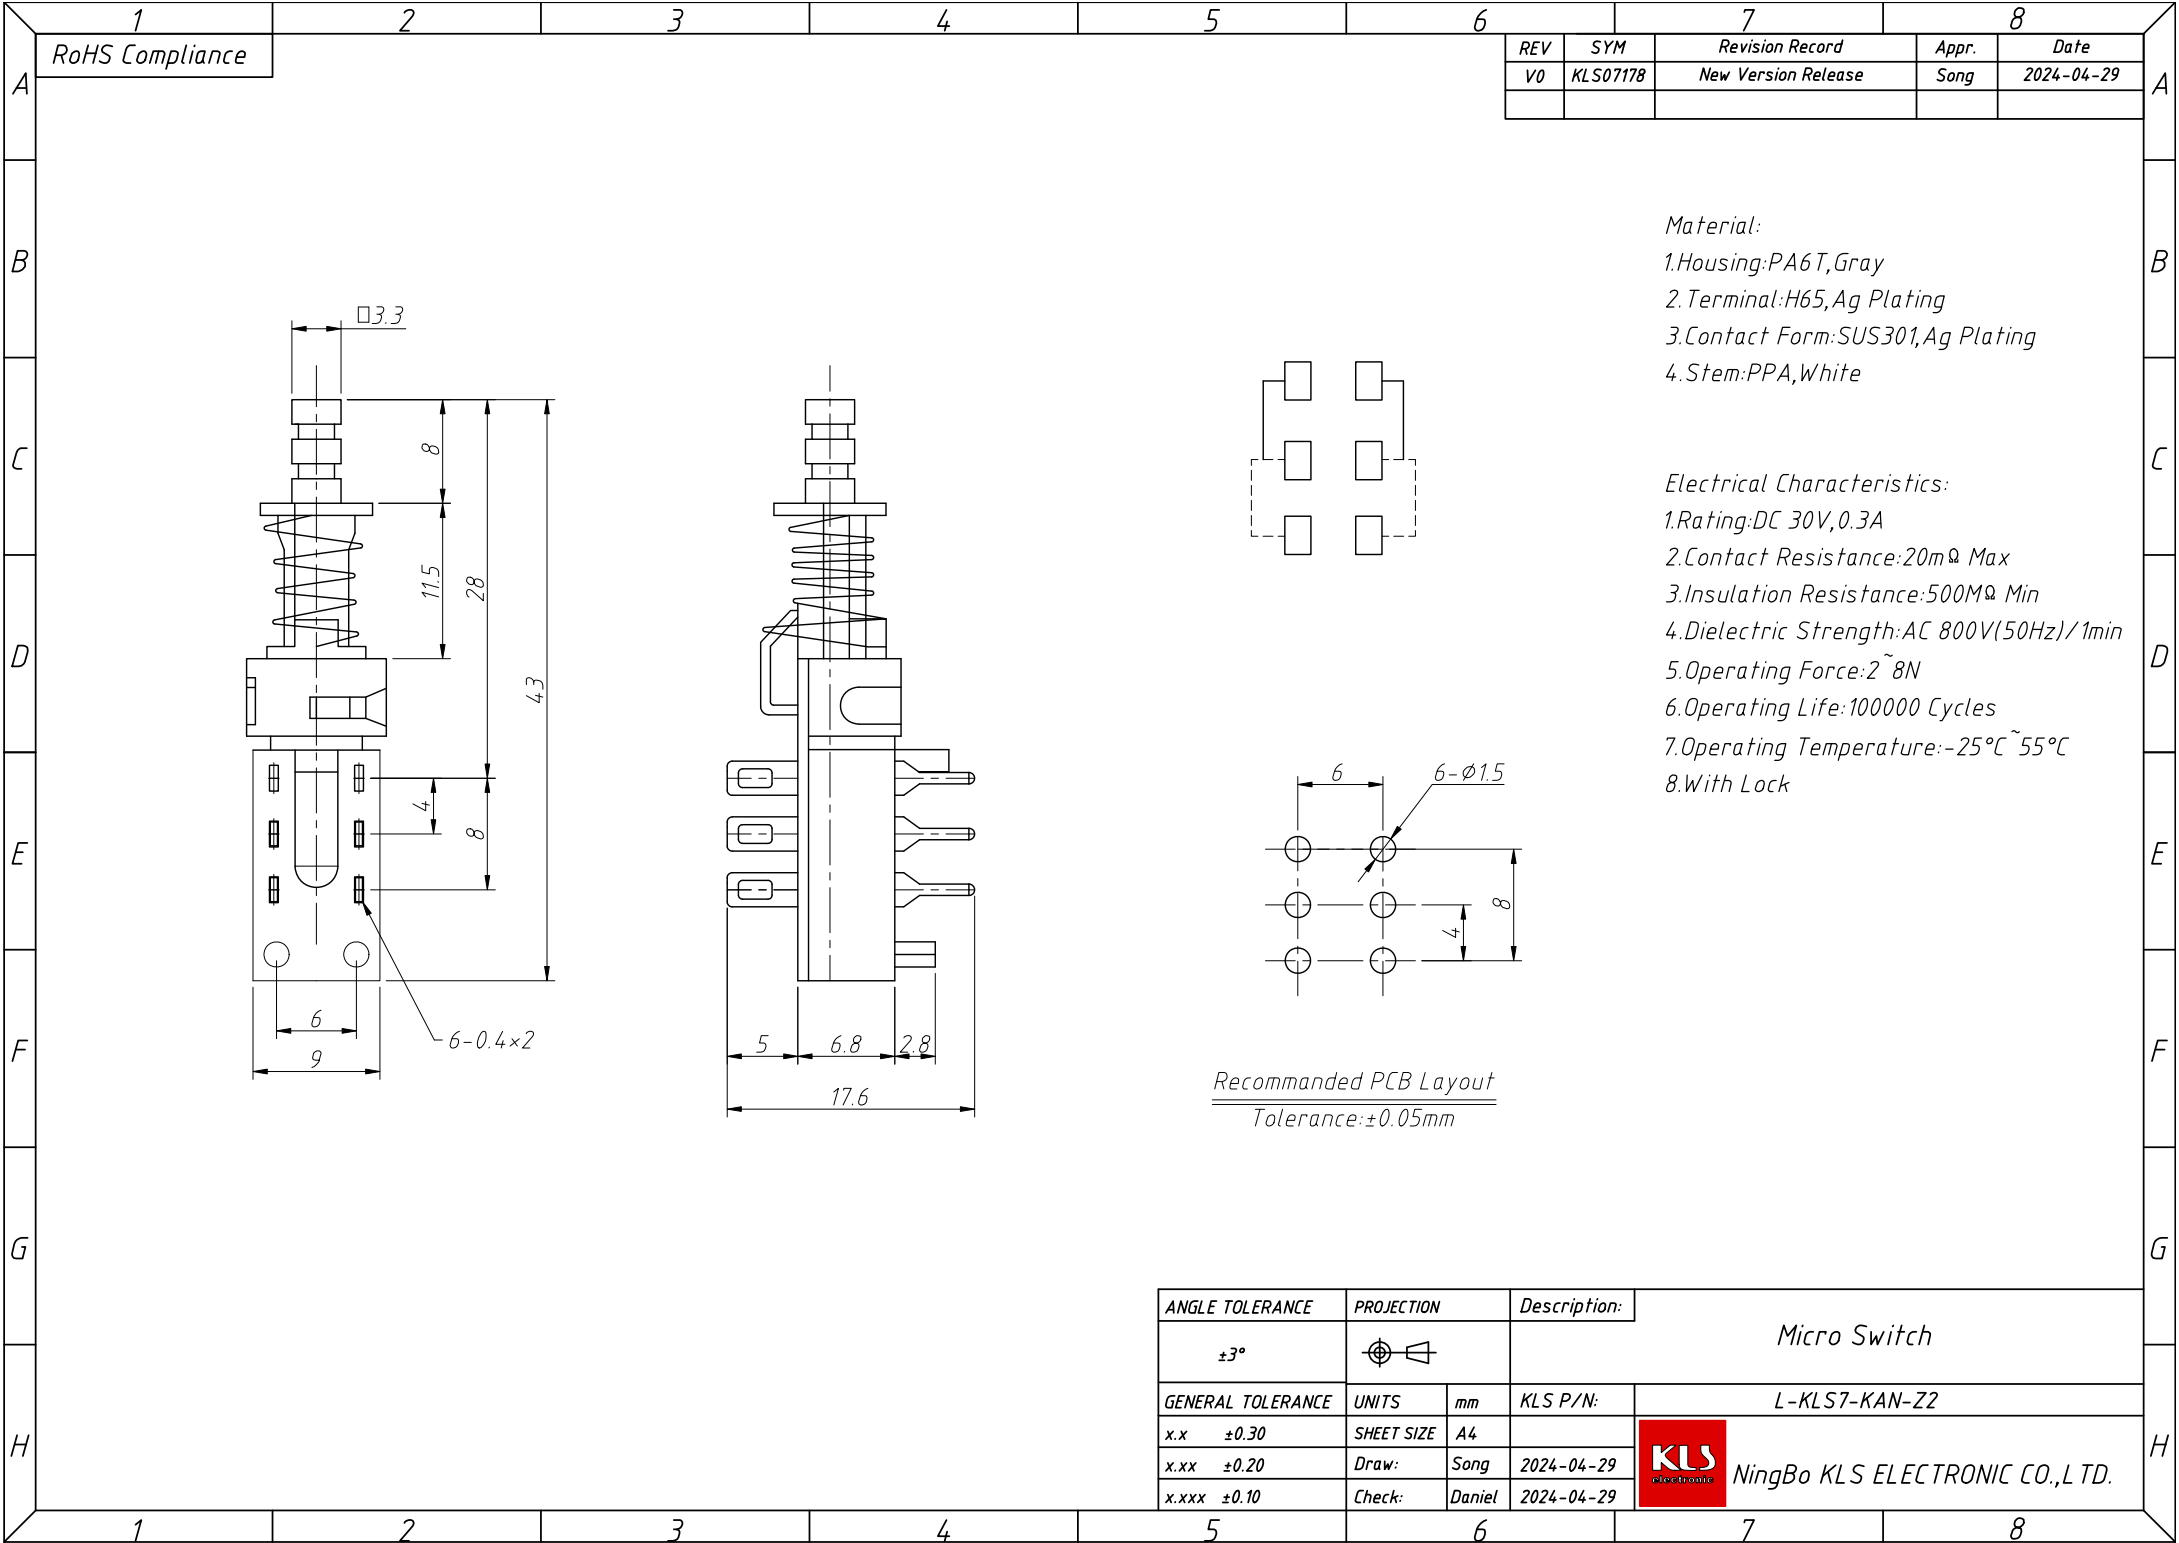

1
RoHS Compliance

2

3

4

5

6

7

8

REV	SYM	Revision Record	Appr.	Date
V0	KLS07178	New Version Release	Song	2024-04-29

Material:
1.Housing:PA6T,Gray
2.Terminal:H65,Ag Plating
3.Contact Form:SUS301,Ag Plating
4.Stem:PPA,White

Electrical Characteristics:
1.Rating:DC 30V,0.3A
2.Contact Resistance:20mΩ Max
3.Insulation Resistance:500MΩ Min
4.Dielectric Strength:AC 800V(50Hz)/1min
5.Operating Force:2~8N
6.Operating Life:100000 Cycles
7.Operating Temperature:-25℃~55℃
8.With Lock

Recommended PCB Layout
Tolerance:±0.05mm

ANGLE TOLERANCE	PROJECTION	Description:	Micro Switch			
±3°						
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS7-KAN-Z2		
x.x ±0.30	SHEET SIZE	A4				
x.xx ±0.20	Draw:	Song	2024-04-29		NingBo KLS ELECTRONIC CO.,LTD.	
x.xxx ±0.10	Check:	Daniel	2024-04-29			