













C € ØROHS FC :AL'us (SO) LM-79 LM-80 (SO)

NEON FLEX SERIES







▼Product Advantages

- Horizontal bendable
- ◆enhanced 2835LED especially for neon product
- ◆Dual-color silicone extrusion
- ◆UV and yellowish resistant
- ◆IP68 and salt-mist proof ◆Flexible and 6LED cuttable
- ◆life time >50000H
- ◆UL 94 V-0
- ◆Easy installation and re-connect accessories

▼Application

- ◆LED neon letter or sign
- *Buliding and sign outline lighting
- •General and cove lighting
- *ship,boats and trucks outline lighting
- *Bathroom, spa room lighting

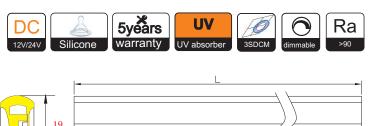




▼Application Notes

Model No.	Voltage(V)	Power(W)	Continuous lengt	h Lumens(lm/m)	LEDs/m	LED Type	IP Rating
RCC0GW10A	12	12	>10meter	>850	120	2835	Ip68
RCC0GW10B	24	12	>10meter	>850	120	2835	Ip68








NEON FLEX SERIES



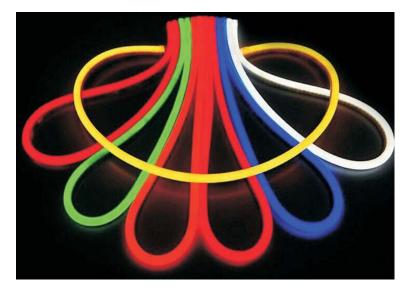

▼Product Advantages

- ◆Vertical bendable,Transparent or diffuse lens
- •enhanced 2835LED especially for neon product
- ◆Dual-color silicone extrusion
- ◆UV and yellowish resistant
- ◆IP68 and salt-mist proof ◆Flexible and 6LED cuttable

MYNICE

- ♦life time >50000H
- ◆UL 94 V-0
- ◆Easy installation and re-connect accessories

▼Application

- ◆Shelf lighting,Freezer and cooler lighting
- •Channel letter or light box in signage
- •General and cove lighting
- •ship,boats and trucks outline lighting
- *Lighting suitable for special liner luminares



5years warranty



▼Application Notes

Model No.	Voltage(V)	Power(W)	Continuous length	Lumens(lm/M) LEDs/ft		LED Type	IP Rating
R9C0GW10A	12	12	>10meter	>850	120	2835	Ip68
R9C0GW10B	24	12	>10meter	>850	120	2835	Ip68





