

CF Cards*SIM Cards*TF Cards*SD







KLS1-SIM-046 Smart Card Acceptor

Specifications:

Insulation resistance:500M min.AT DC 500V DC
Withstanding Voltage:250V AC FOR 1 Minute
Contact Resistance:100M Max.
Current Rating:0.5A
Voltage Rating:5.0V
Operating Temp.Pange:-55°C- +85°C
Mating Cycles:5000 Insertions


Material:

Insulator:H-Temperature Plastic,UL 94V-0
Terminal:Copper Alloy,T=0.15mm
Switch:Copper Alloy,T=0.10mm
Shell:Stainless Stell,T=0.15mm

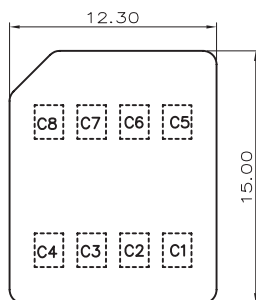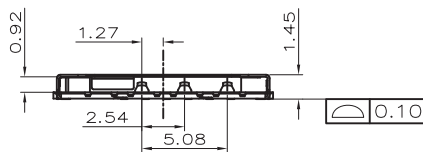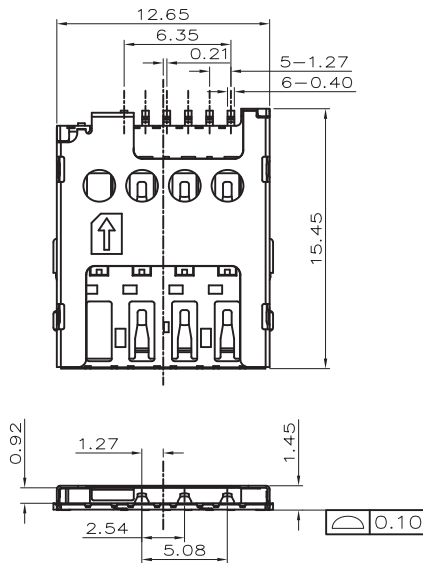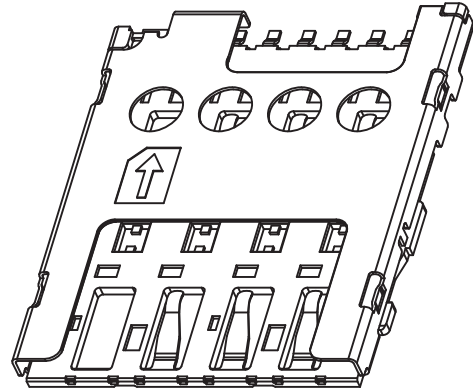

MICRO-SIM CARD DIM.(REF.)

PIN ASSSIGNMETNT:
PIN1:VCC
PIN2:RST
PIN3:CLK
PIN4:RESERVED
PIN5:GND
PIN6:VPP
PIN7:I/O
PIN8:RESERVED

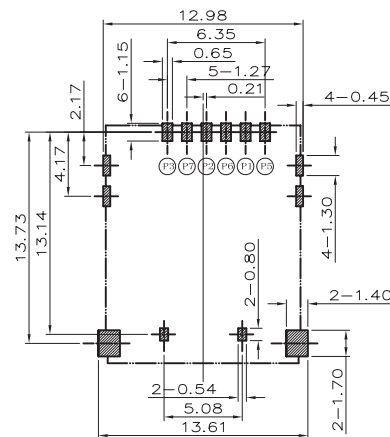

RECOMMENDED P.C.B. LAYOUT
(TOLERANCE:±0.05)

ORDER INFORMATION

Product NO.: KLS1-SIM-046-6P

