


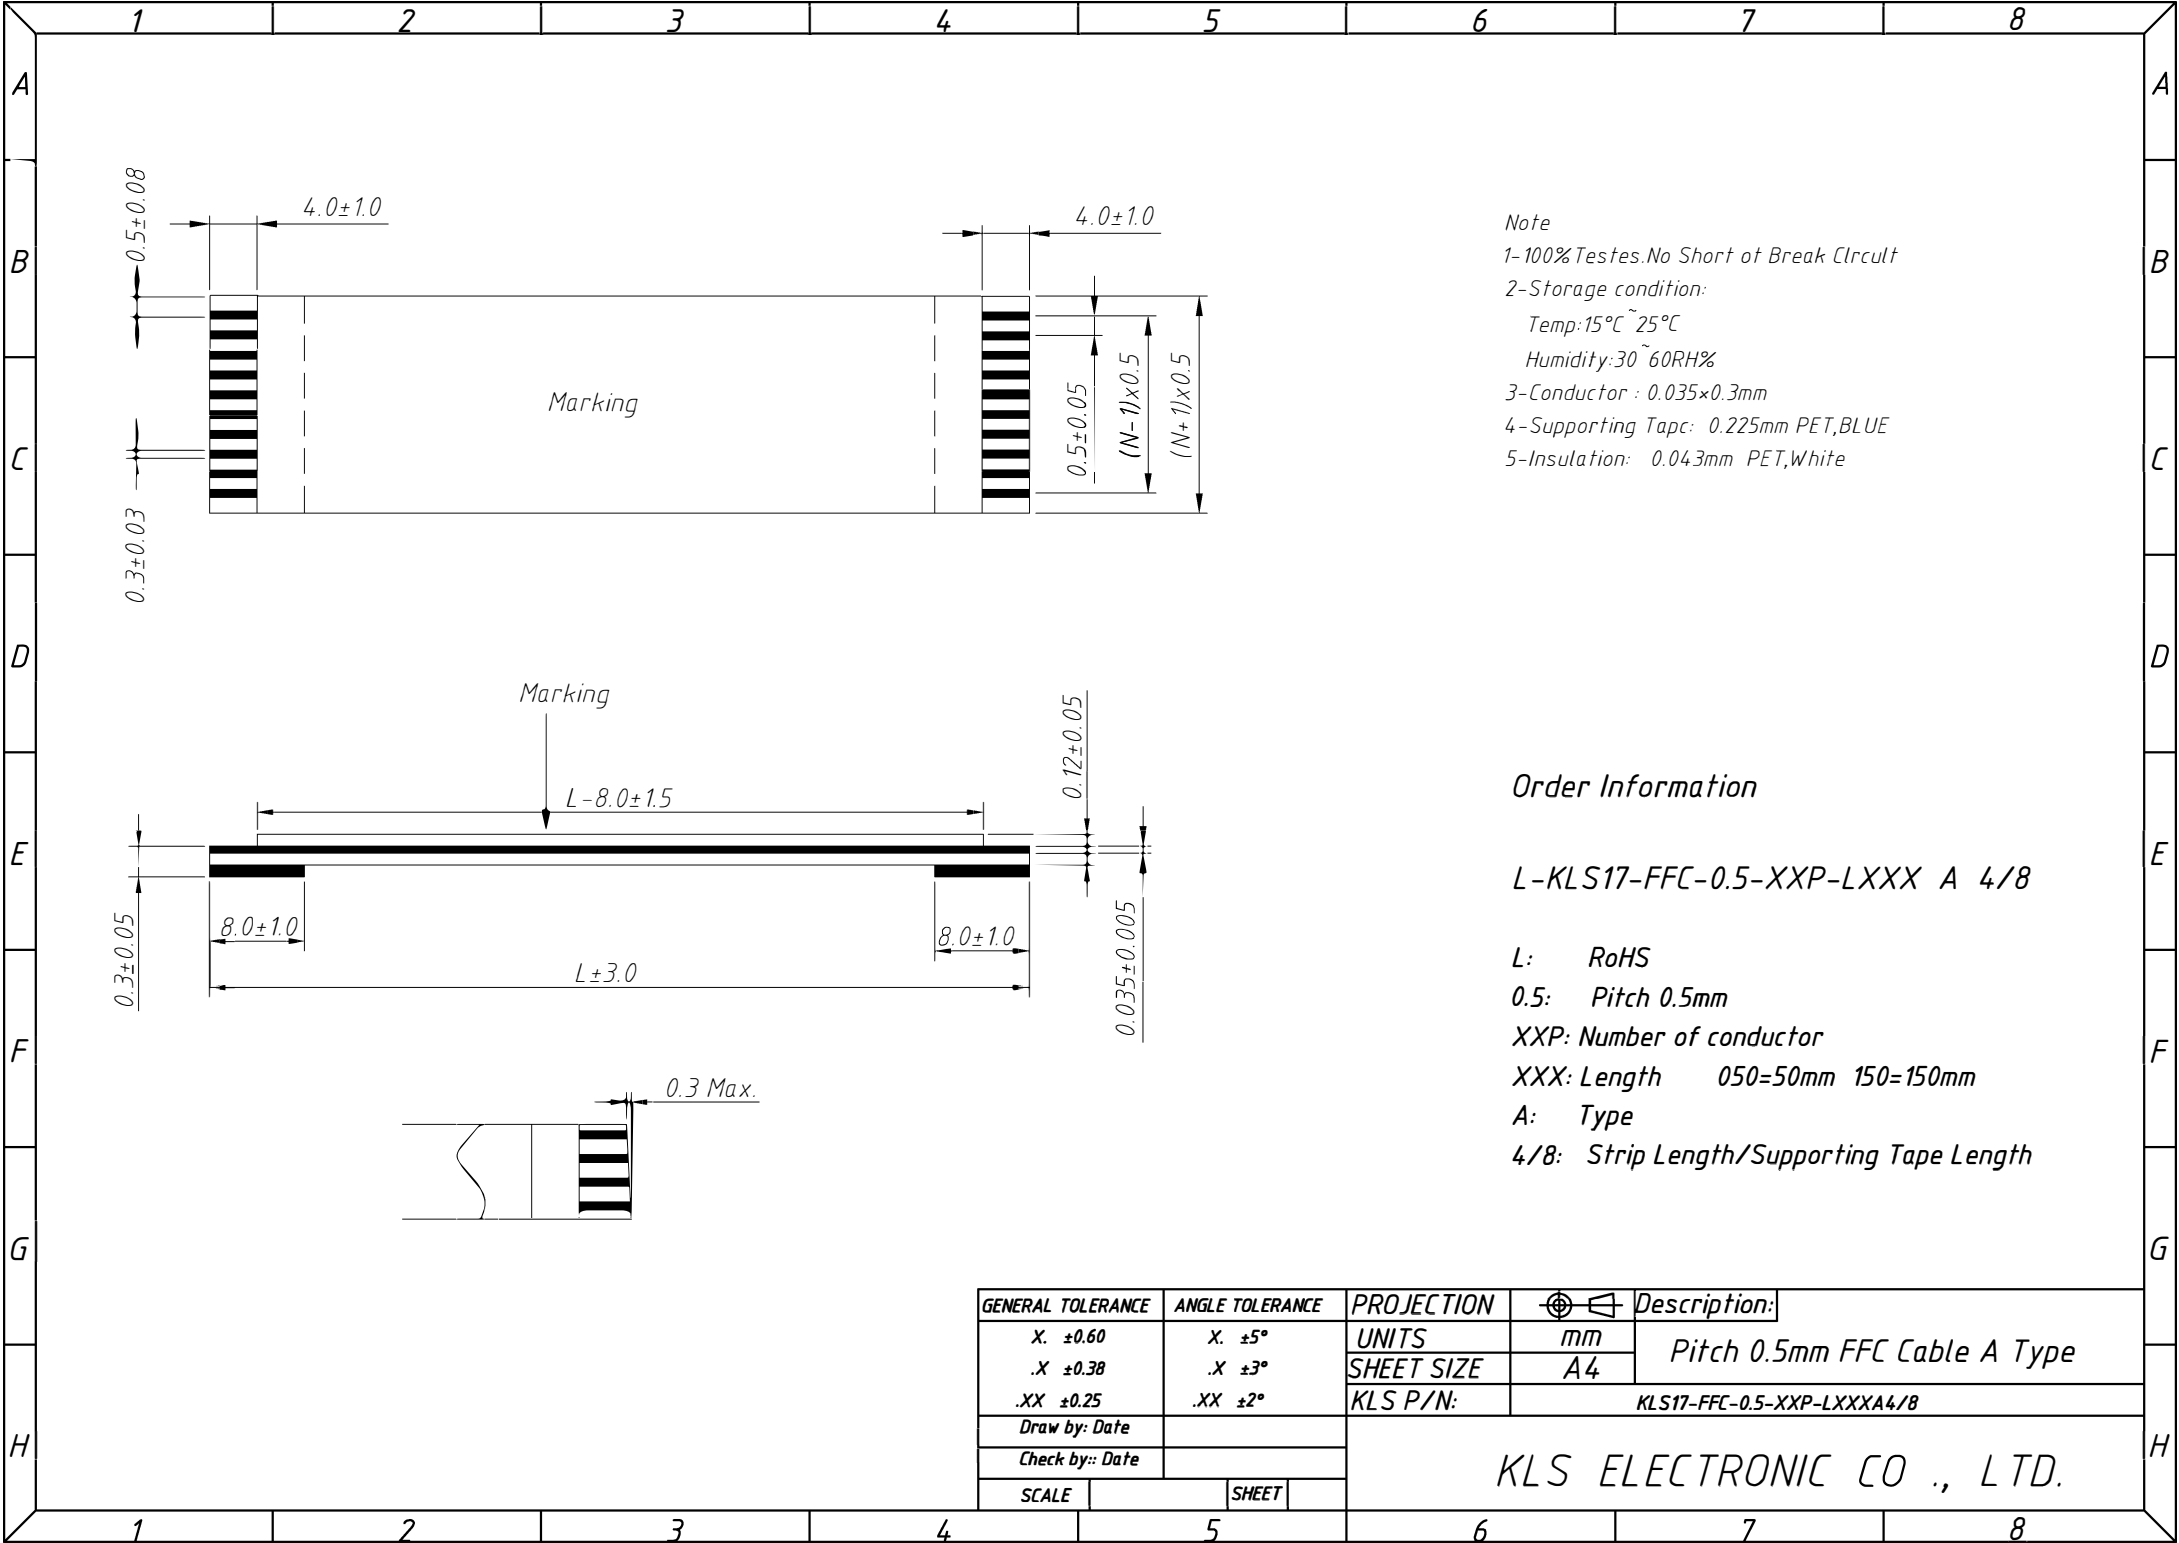


Note
1-100%Testes.No Short at Break Clrcult
2-Storage condition:
Temp:15°C~25°C
Humidity:30~60RH%
3-Conductor : 0.035×0.3mm
4-Supporting Tape: 0.225mm PET,BLUE
5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-0.5-XXP-LXXX A 4/8

L: RoHS
0.5: Pitch 0.5mm
XXP: Number of conductor
XXX: Length 050=50mm 150=150mm
A: Type
4/8: Strip Length/Supporting Tape Length

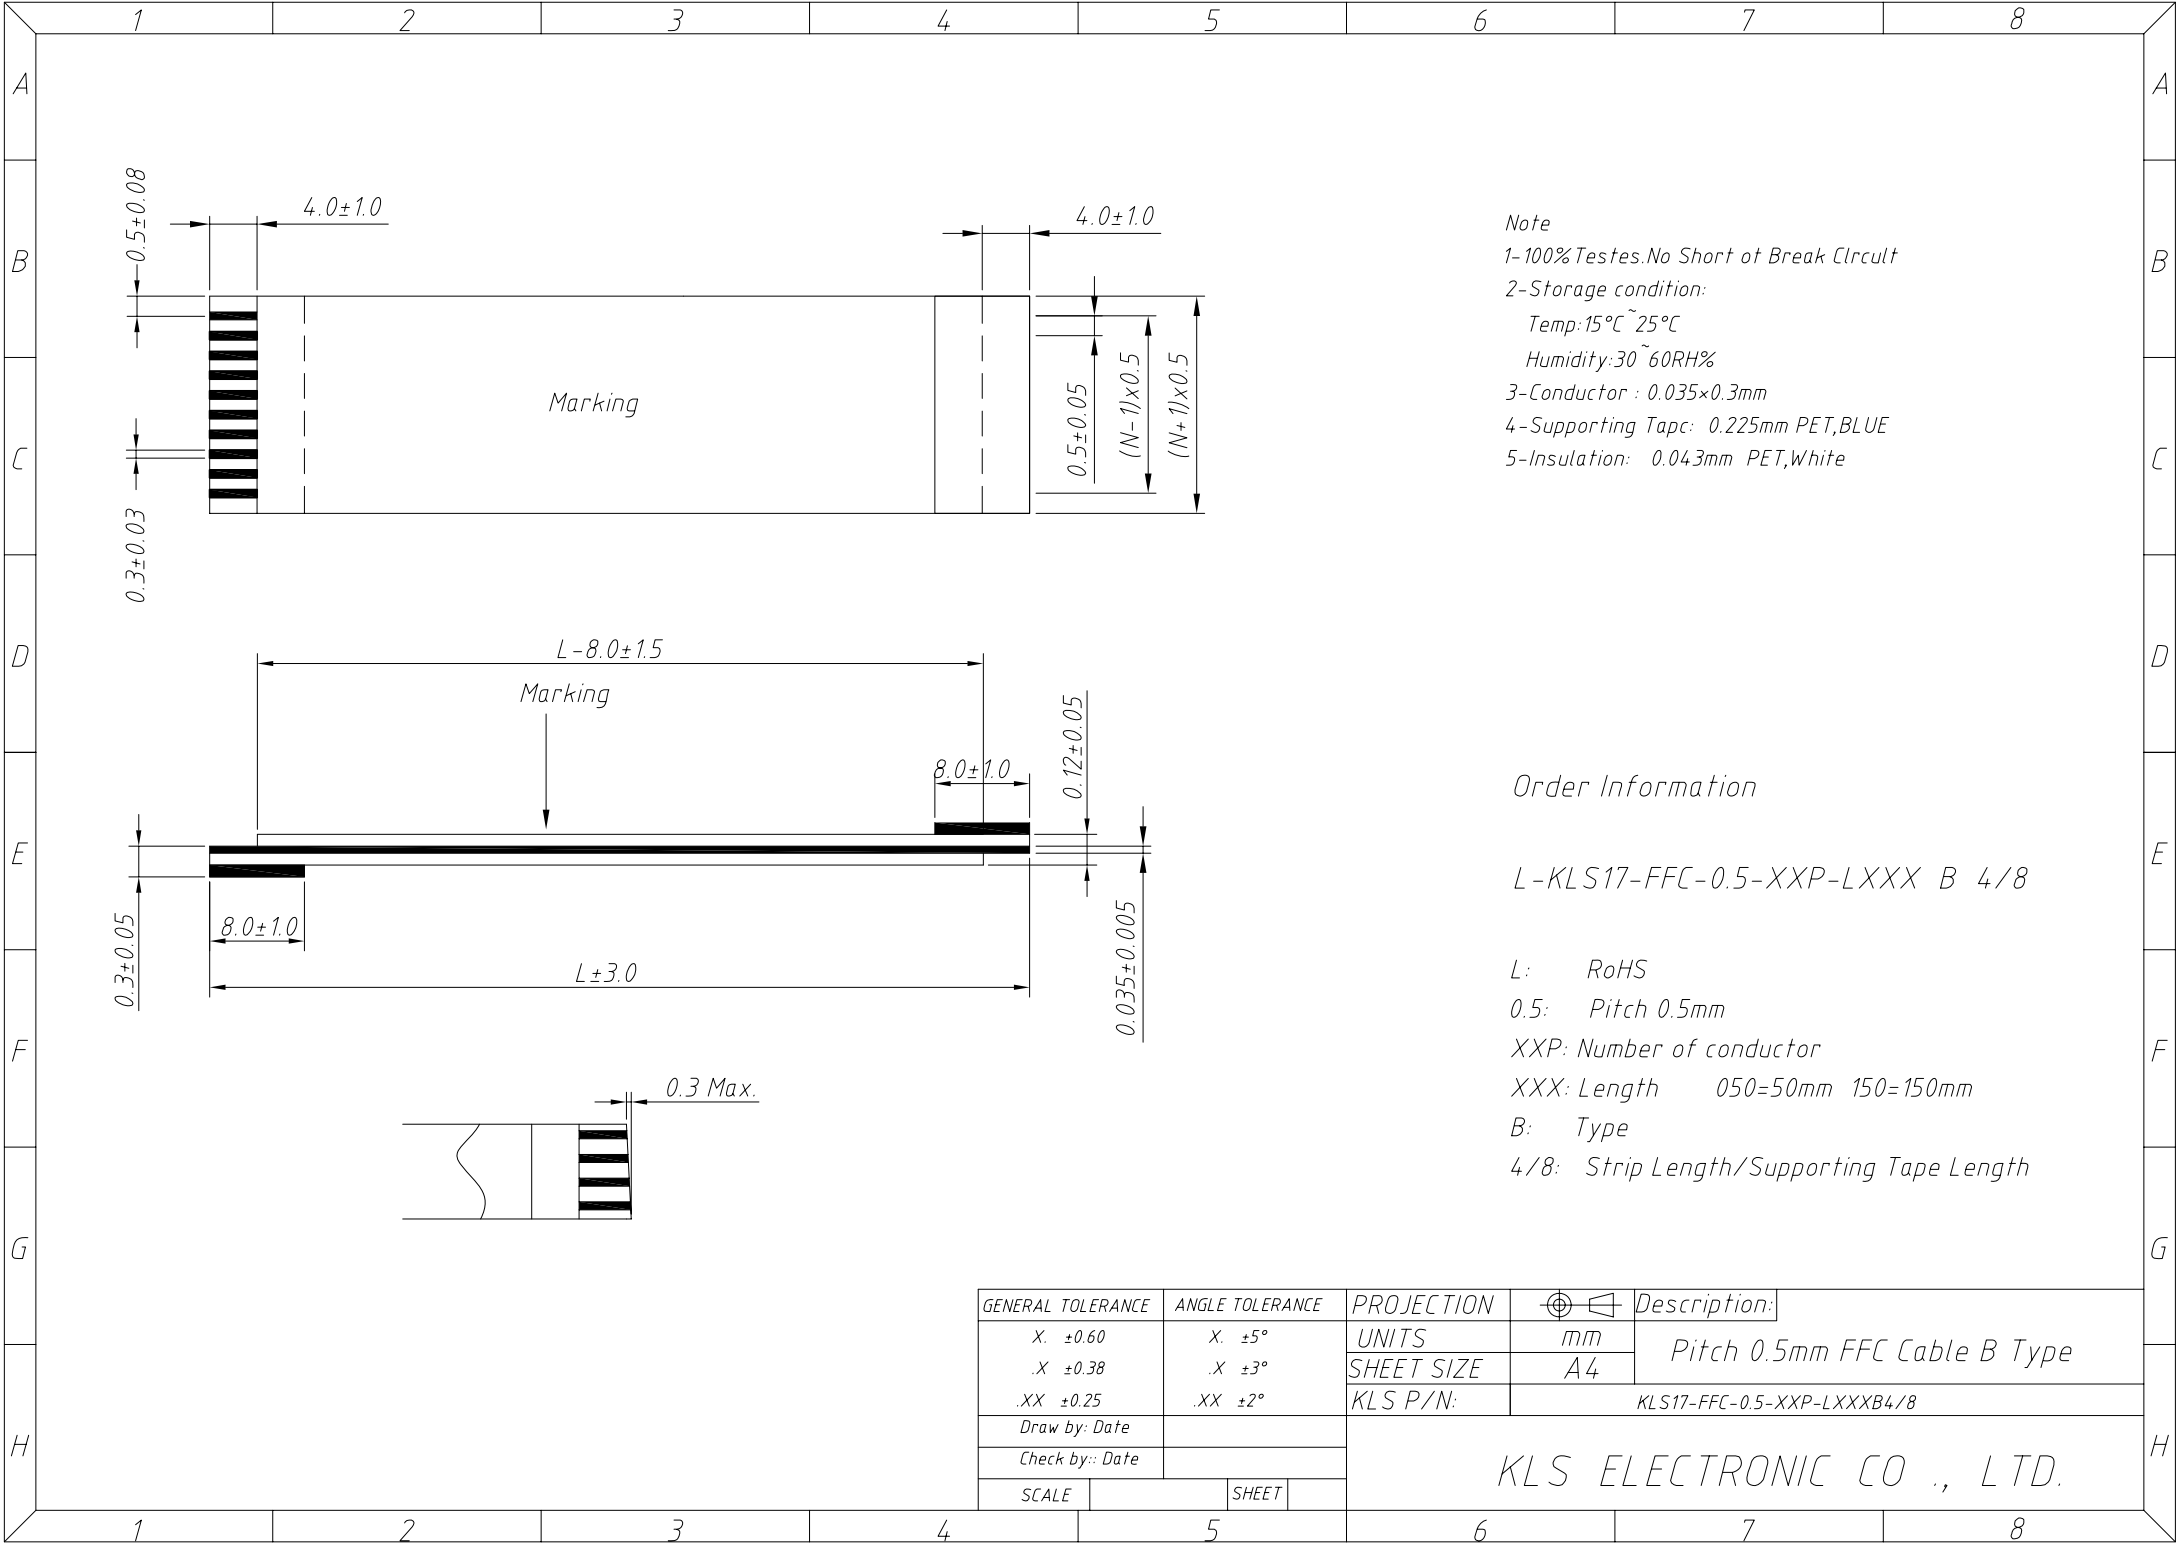


Note
1-100%Testes.No Short at Break Clrcult
2-Storage condition:
Temp:15℃~25℃
Humidity:30~60RH%
3-Conductor : 0.035×0.3mm
4-Supporting Tapc: 0.225mm PET,BLUE
5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-0.5-XXP-LXXX B 4/8

L: RoHS
0.5: Pitch 0.5mm
XXP: Number of conductor
XXX: Length 050=50mm 150=150mm
B: Type
4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
.X ±0.60		.X ±5°		UNITS	mm	Pitch 0.5mm FFC Cable B Type
.X ±0.38		.X ±3°		SHEET SIZE	A4	
.XX ±0.25		.XX ±2°		KLS P/N:	KLS17-FFC-0.5-XXP-LXXXB4/8	
Draw by: Date				KLS ELECTRONIC CO., LTD.		
Check by: Date						
SCALE			SHEET			

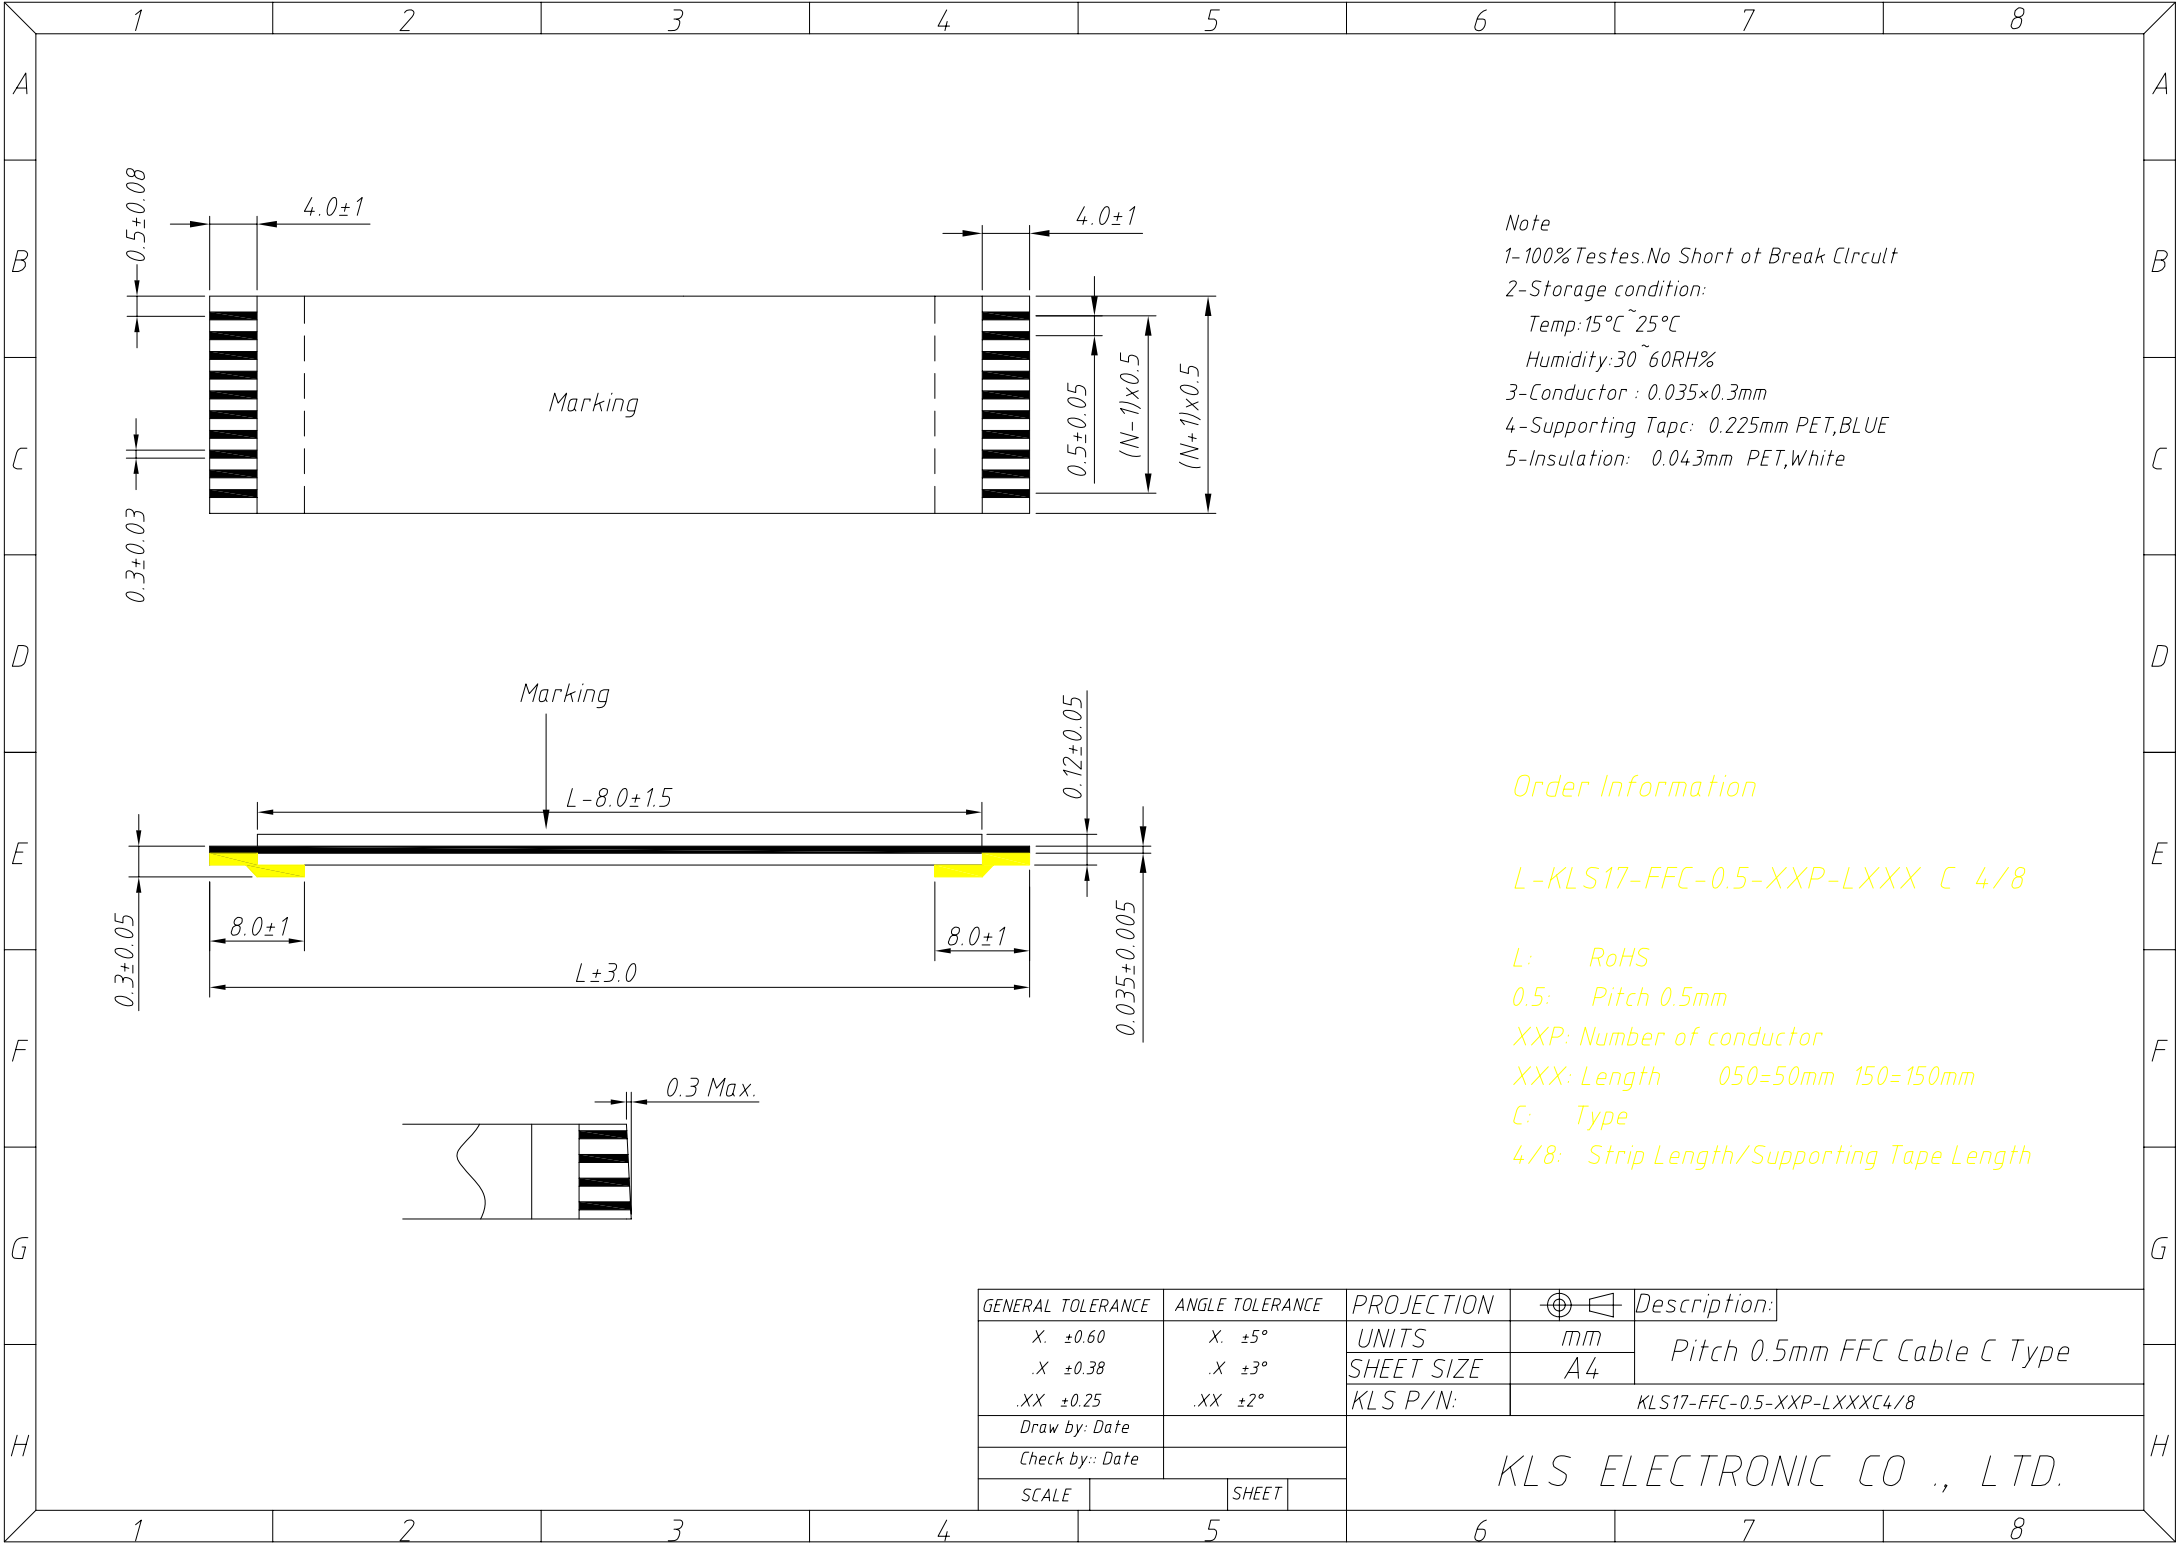


Note
1-100% Testes.No Short at Break Clrcult
2-Storage condition:
Temp:15°C~25°C
Humidity:30~60RH%
3-Conductor : 0.035×0.3mm
4-Supporting Tapc: 0.225mm PET,BLUE
5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-0.5-XXP-LXXX C 4/8

L: RoHS
0.5: Pitch 0.5mm
XXP: Number of conductor
XXX: Length 050=50mm 150=150mm
C: Type
4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
.X ±0.60		.X ±5°		UNITS	mm	Pitch 0.5mm FFC Cable C Type
.X ±0.38		.X ±3°		SHEET SIZE	A4	
.XX ±0.25		.XX ±2°		KLS P/N:	KLS17-FFC-0.5-XXP-LXXXC4/8	
Draw by: Date				KLS ELECTRONIC CO., LTD.		
Check by: Date						
SCALE			SHEET			

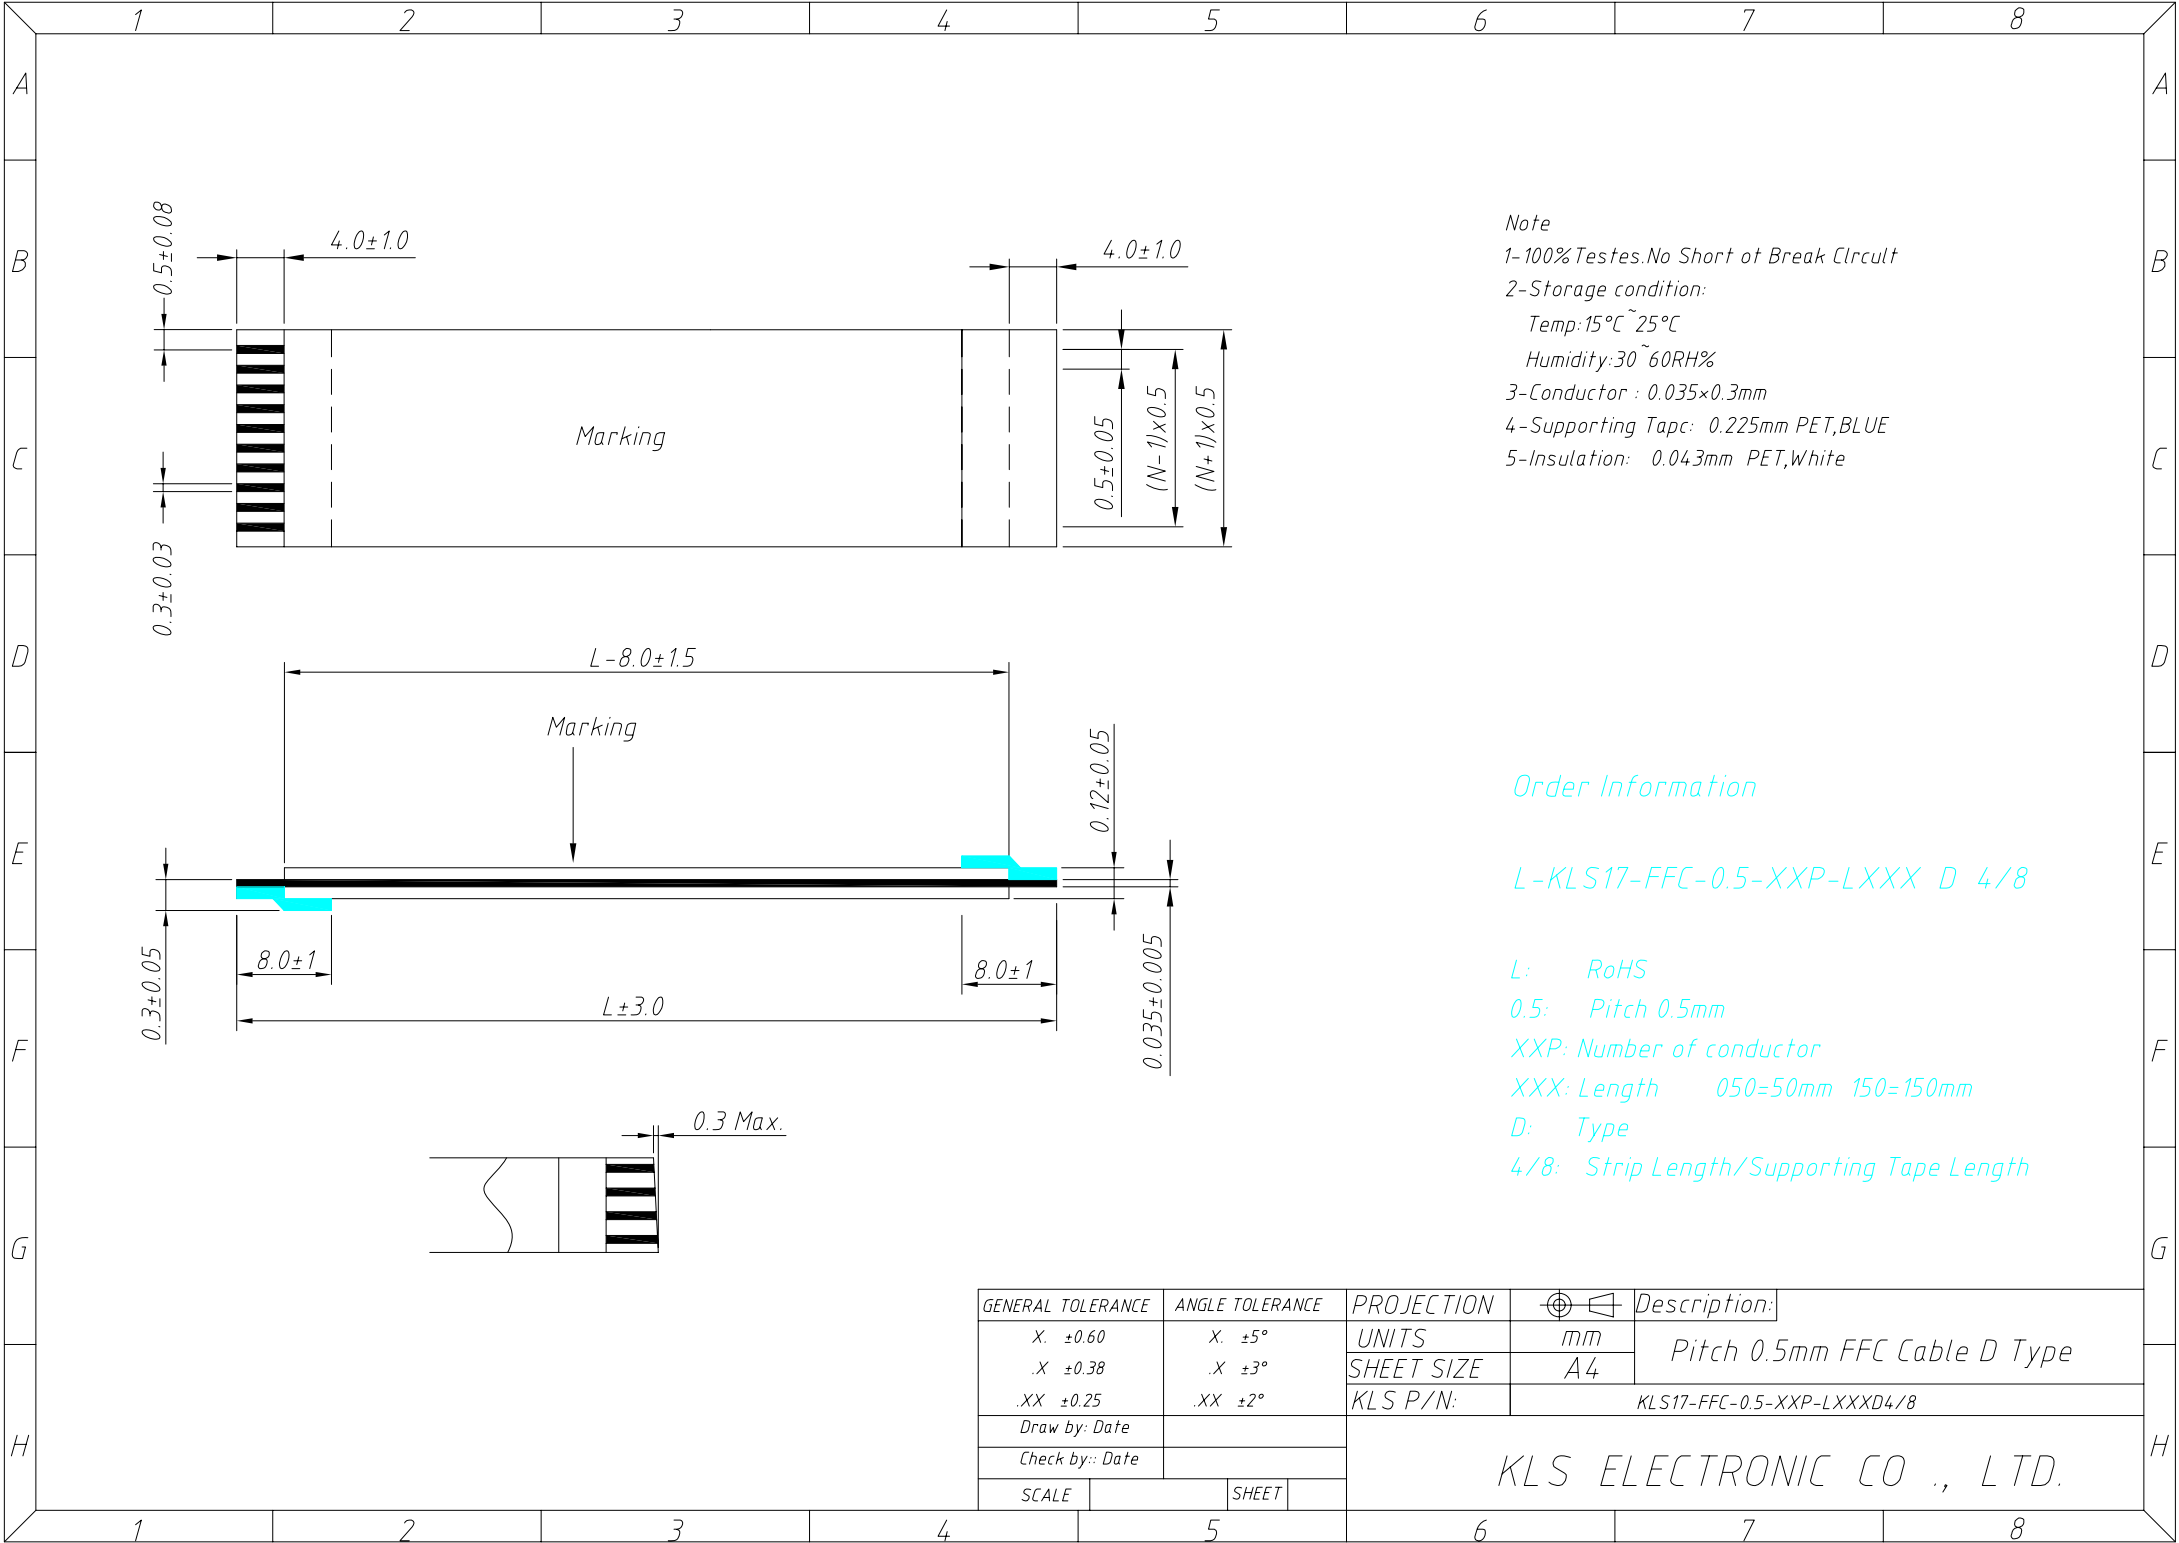

Note
1-100%Testes.No Short at Break Clrcult
2-Storage condition:
Temp:15℃~25℃
Humidity:30~60RH%
3-Conductor : 0.035×0.3mm
4-Supporting Tapc: 0.225mm PET,BLUE
5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-0.5-XXP-LXXX D 4/8

L: RoHS
0.5: Pitch 0.5mm
XXP: Number of conductor
XXX: Length 050=50mm 150=150mm
D: Type
4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
.X ±0.60		.X ±5°		UNITS	mm	Pitch 0.5mm FFC Cable D Type
.X ±0.38		.X ±3°		SHEET SIZE	A4	
.XX ±0.25		.XX ±2°		KLS P/N:	KLS17-FFC-0.5-XXP-LXXXD4/8	
Draw by: Date				KLS ELECTRONIC CO., LTD.		
Check by: Date						
SCALE		SHEET				