


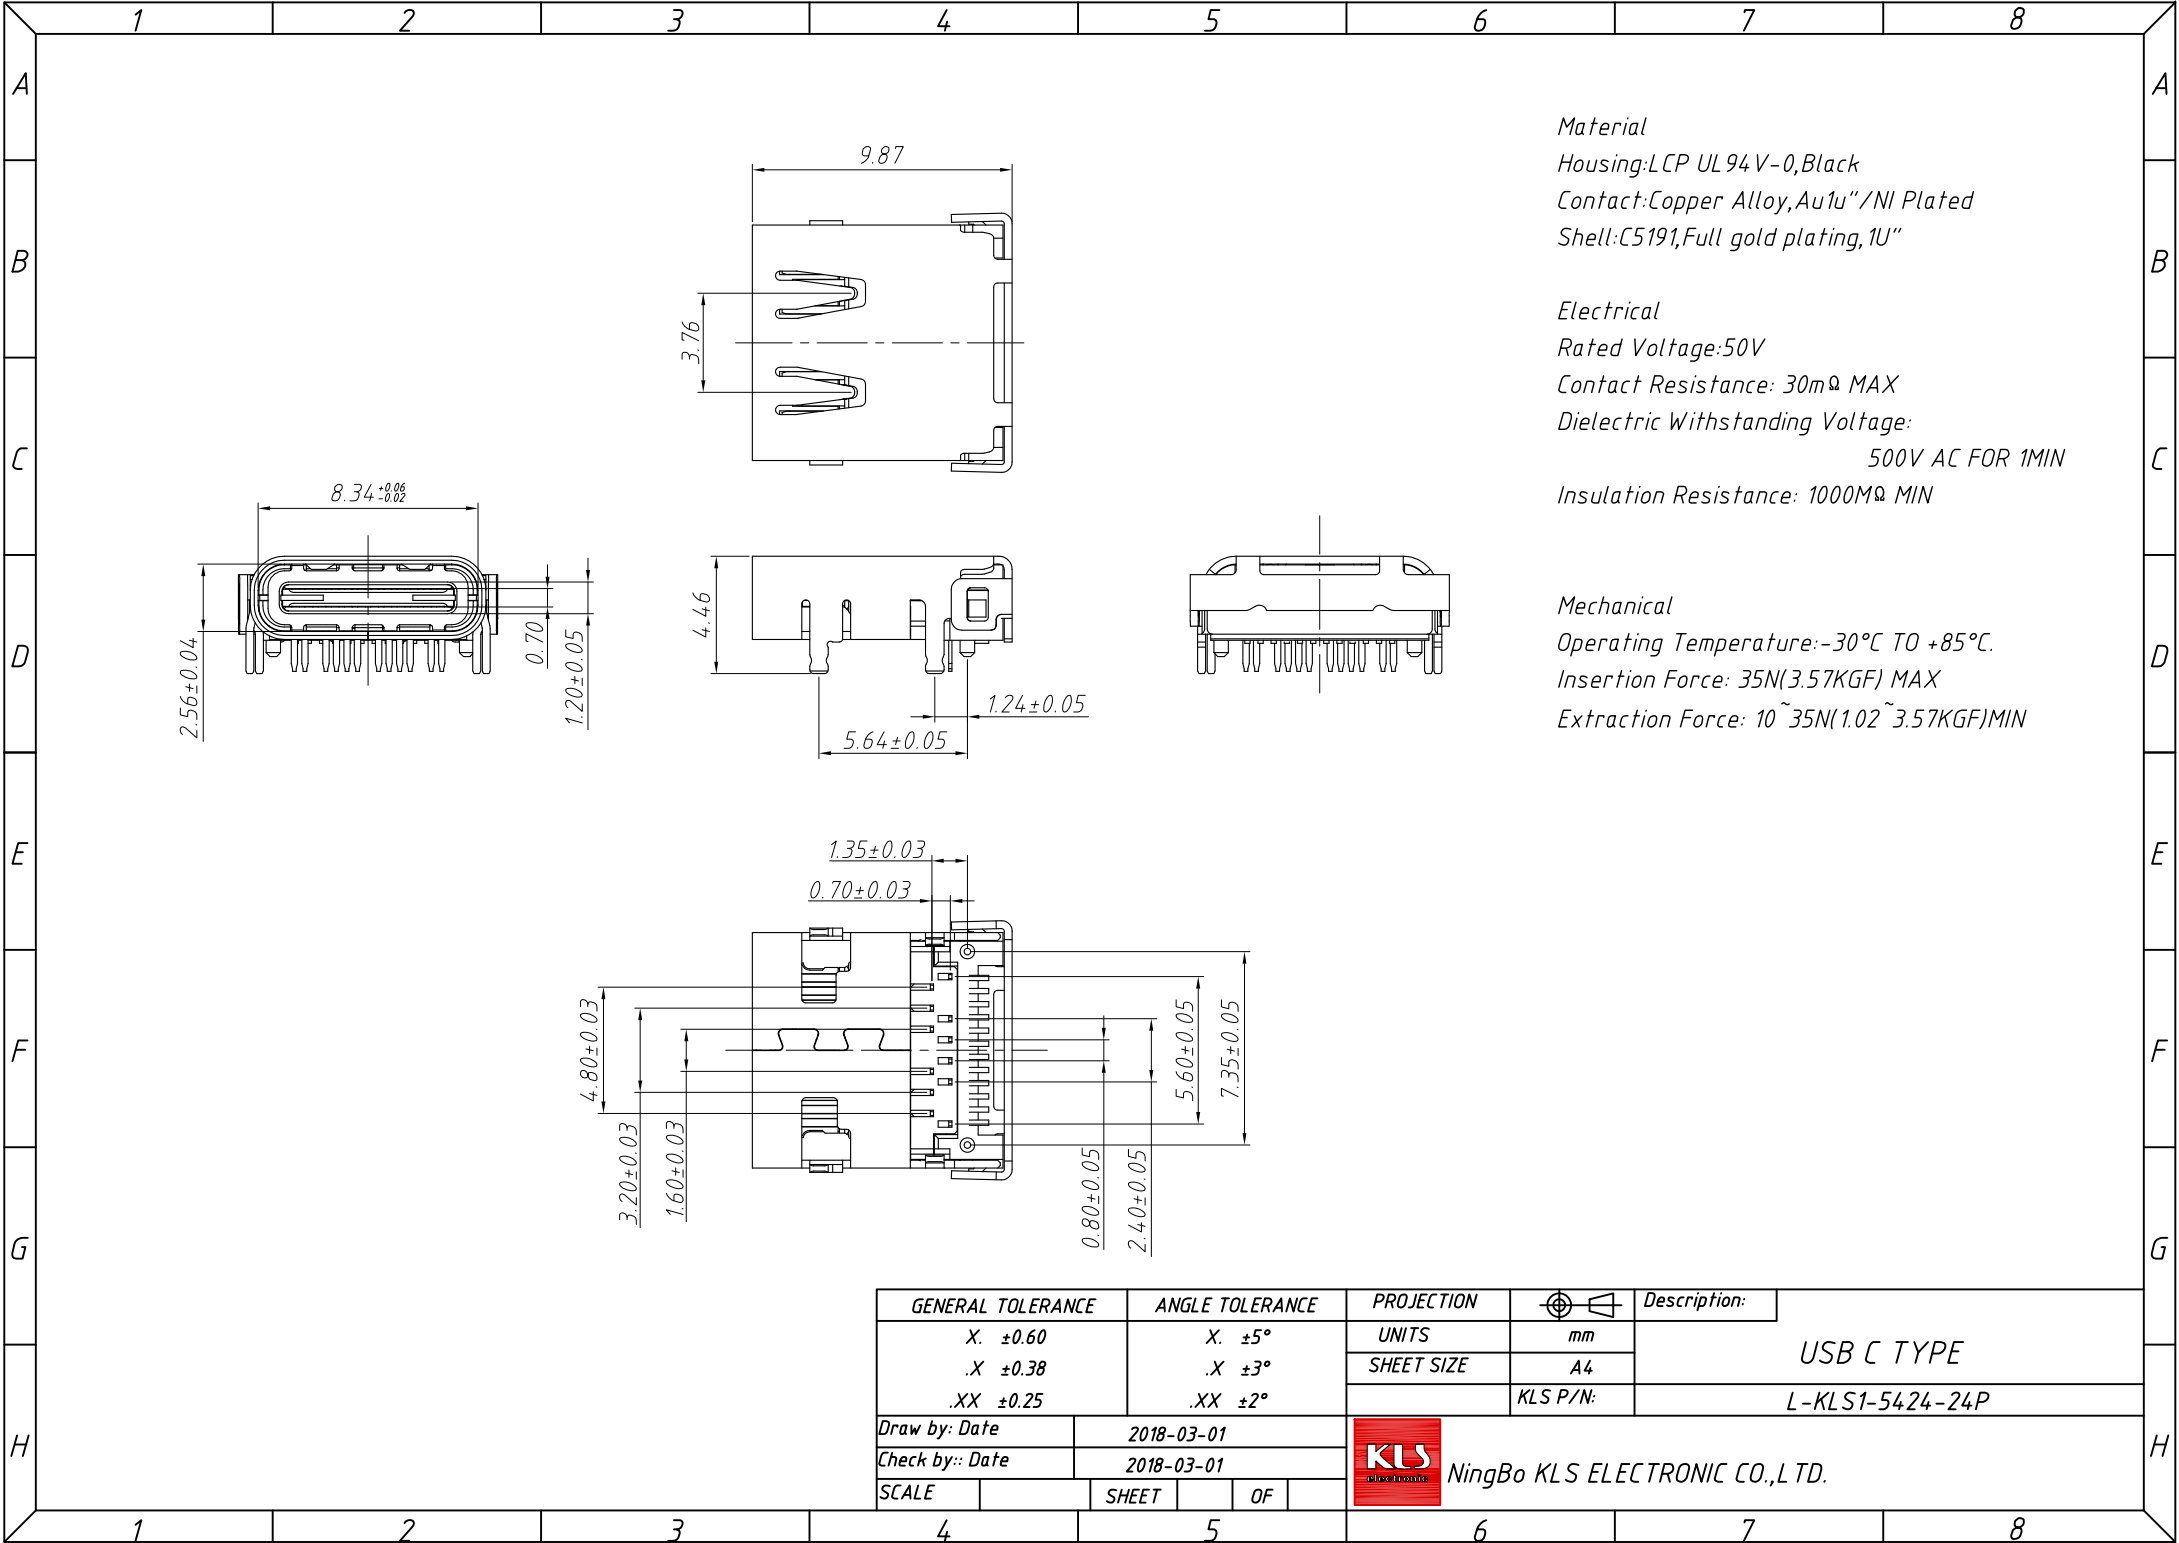

Material
Housing:LCP UL94V-0,Black
Contact:Copper Alloy,Au1u"/NI Plated
Shell:C5191,Full gold plating,1U"

Electrical
Rated Voltage:50V
Contact Resistance: 30m Ω MAX
Dielectric Withstanding Voltage:
500V AC FOR 1MIN
Insulation Resistance: 1000M Ω MIN

Mechanical
Operating Temperature:-30 $^{\circ}$ C TO +85 $^{\circ}$ C.
Insertion Force: 35N(3.57KGF) MAX
Extraction Force: 10~35N(1.02~3.57KGF)MIN

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ± 0.60		X. $\pm 5^{\circ}$		UNITS	mm	USB C TYPE
.X ± 0.38		.X $\pm 3^{\circ}$		SHEET SIZE	A4	
.XX ± 0.25		.XX $\pm 2^{\circ}$			KLS P/N:	
						L-KLS1-5424-24P
Draw by: Date		2018-03-01			NingBo KLS ELECTRONIC CO.,LTD.	
Check by:: Date		2018-03-01				
SCALE		SHEET				