




The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNELY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


1
2
3
4
5
6
7
8

TOLERANCE:

Abbr.	TOLERANCE						
	P=0.50	P=0.80	P=1.00	P=1.25	P=1.50	P=2.00	P=2.54
P	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
Pt	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
W	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
M	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
Cw	±0.020	±0.030	±0.030	±0.030	±0.030	±0.040	±0.040
L	(15~100)±3 (101~300)±5 (301~600)±10 (601~1000)±15						

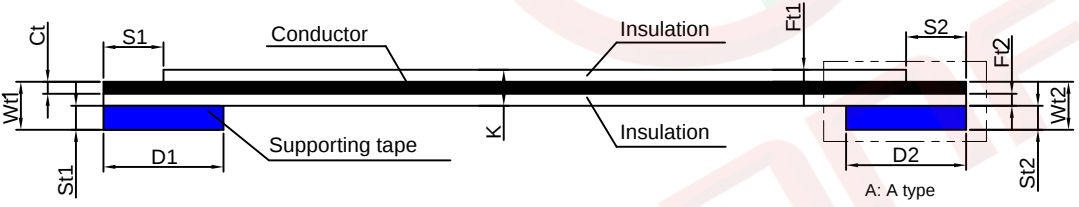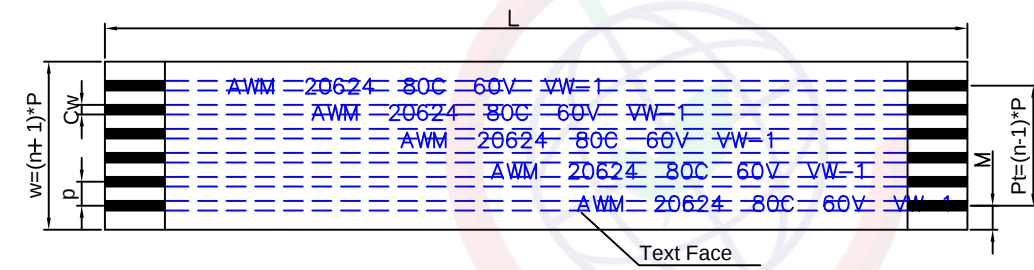

Pitch	No.Of positions	Conductor Size Ct*Cw (mm)	Strip Length S1=S2 (mm)	Supporting tape Length D1=D2 (mm)
p=0.50	06~60pin	0.035x0.3	3or4	6or8
p=0.80	06~40pin	0.05x0.5	4or5	8or10
p=1.00	03~50pin	0.035x0.65	4or5	8or10
p=1.25	03~36pin	0.05x0.8	4or5or6	10
p=1.50	02~30pin	0.10x0.5	4or5or6	10
p=2.00	02~30pin	0.10x0.5	3or4or5or6	5or6or8or10
p=2.54	02~18pin	0.10x0.7	4or5or6	10
		0.10x1.27		



Ft1±0.005	0.043
Ft2±0.005	0.043



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1057-03-XXXXX-J		

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 01/16/09'		LJC 01/16/09'
J	DRAWING UPDATE	JLZ 12/27/19'		

NOTES:

- Insulation material: PVC
Supporting Tape material: Polyester
Conductor material: Tin plated copper
Temperature: -20°C~+80°C.
- Product Number Code

DS1057-03 - X X X X X X X X X X

Cable Style
A: A type
B: B type
Cable Thickness
1: 0.12mm
4: 0.136mm(For Ph 1.25mm)

Total Length(Dim L)
A: 110mm B: 150mm
C: 120mm D: 160mm
E: 100mm F: 200mm
G: 250mm
or XXX:XXXmm

Supporting tape Length
4: 4.0mm 5: 5.0mm
6: 6.0mm 8: 8.0mm
10: 10.0mm

Supporting Tape color
L: Blue

Strip Length
2: 2.0mm 3: 3.0mm
4: 4.0mm 5: 5.0mm
6: 6.0mm

Insulation color
W: White

No.Of positions
02: 2pin
60: 60pin

Conductor Size
H: 0.035x0.65mm(Ph 1.0mm)
J: 0.035x0.3mm(Ph 0.5mm)
K: 0.05x0.8mm(Ph 1.25mm)

Pitch
1: 1.00 5: 0.50
2: 2.00 6: 1.25
3: 1.50 8: 0.80
4: 2.54

PROJECTION		TITLE	UL 20624 FLEXIBLEFLAT CABIE	
UNITS	mm			
SHEET SIZE	A4	SERIES	DS1057-03	SERIES
晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD				