
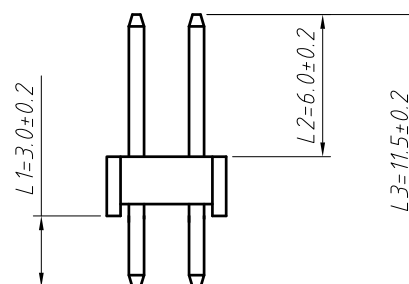


Recommended P.C.B Hole Layout

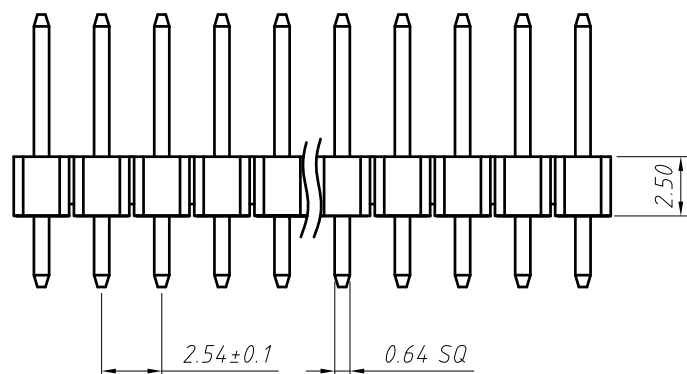

Material:

Standard: PA6T

Contact: Brass

Insulator: Polyester, UL 94 V-0

Electrical Characteristics:

Rated Current: 3AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 1000V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C ~ +105°C

Order Information:

L-KLS1-207-2.50-2-XX-S-L1xL2xL3-G0

L: RoHS

Pin Header Series

207: 2.54mm

Plastics Height:

1.50, 1.70, 2.00, 2.50 mm

Per Row: Dual Row

Pin: No. of Pins (2x40)

Type: Straight Pin

Size: L1xL2xL3

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold

Dimension antitheses list (mm)

ITEM	L1	L2	L3	Plastic Height
Standard	3.00	6.00	11.5	2.50
Nonstandard	---	---	---	---

ANGLE TOLERANCE	PROJECTION	Description:	2.54mm Pin Header	
±3°			Dual Row, Straight Pin, 2xN Pin	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-207-2.50-2-XX-S-L1xL2xL3-G0
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2018-07-10	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ±0.10	Check:	Daniel	2018-07-10	