

Model No.	FYL-3014SURC1A
Date / Rev.	2018.12.11 / A

PRODUCT SPECIFICATION

Model No.: FYL-3014SURC1A

Descriptions:
■ Dice material: AlInGaP.
■ Emitting Color: Super bright Red.
■ Device Outline: Φ3mm Round Type.
■ Lens Type: Water clear.



CUSTOMER APPROVED SIGNATURES	APPROVED BY	SALES BY	PREPARED BY

NINGBO FORYARD OPTOELECTRONICS CO.,LTD.

Add:NO.115 Qixin Road Ningbo Zhejiang China

Zip:315051

Tel: 0086-574-87933652 87927870 87922206

Fax: 0086-574-87927917

E-mail: Sales@foryard.com (General)


[Http://www.foryard.com](http://www.foryard.com)

Model No.	FYL-3014SURC1A
Date / Rev.	2018.12.11 / A

■ Features

1. Low power consumption.
2. High efficiency.
3. General purpose leads.
4. High intensity.
5. RoHs compliant.

■ Package configuration

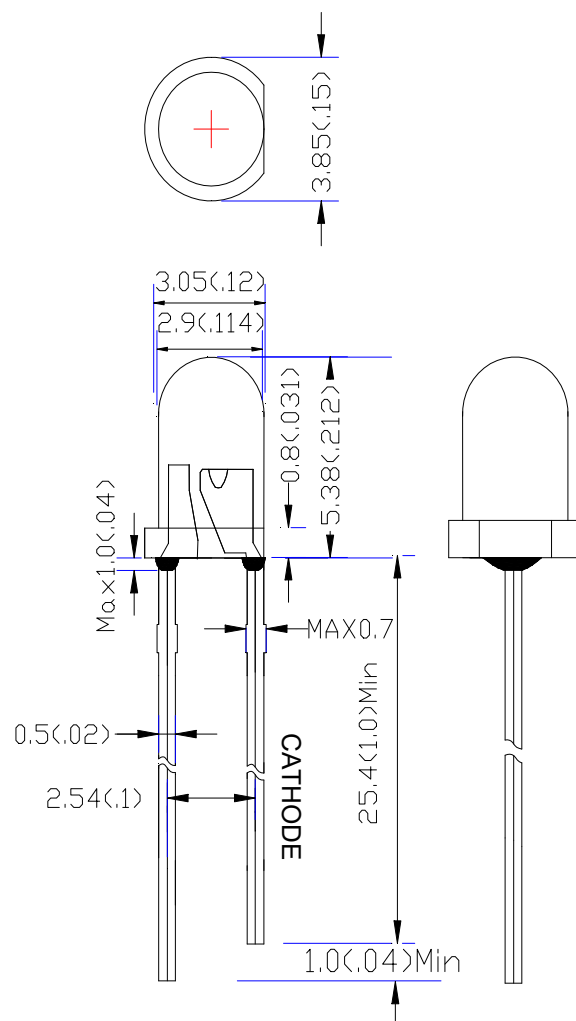

Notes:

1. All dimensions are millimeters (inches)
2. Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

Model No.	FYL-3014SURC1A
Date / Rev.	2018.12.11 / A

■ Absolute maximum ratings(Ta=25 °c)

Parameter	MAX.	Unit
Power Dissipation	75	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	30	mA
Derating Linear From 50°C	0.4	mA/°C
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +85°C	
Storage Temperature Range	-40°C to +100°C	
Lead Soldering Temperature[4mm(.157") From Body]	260°C for 5 Seconds	


■ Electrical and optical characteristics(Ta=25 °c)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	–	2500	–	mcd	I _F =20mA
Viewing Angle	2θ _{1/2}	–	30	–	Deg	
Peak Emission Wavelength	λ _p	–	630	–	nm	
Dominant Wavelength	λ _d	620	625	630	nm	
Spectral Line Half-Width	Δλ	–	15	–	nm	
Forward Voltage	V _F	1.8	2.0	2.2	V	
Reverse Current	I _R			10	μA	V _R =5V


Model No.	FYL-3014SURC1A
Date / Rev.	2018.12.11 / A

■ Typical Electrical Characteristics Curves

(25 °c Ambient Temperature Unless Otherwise Noted)

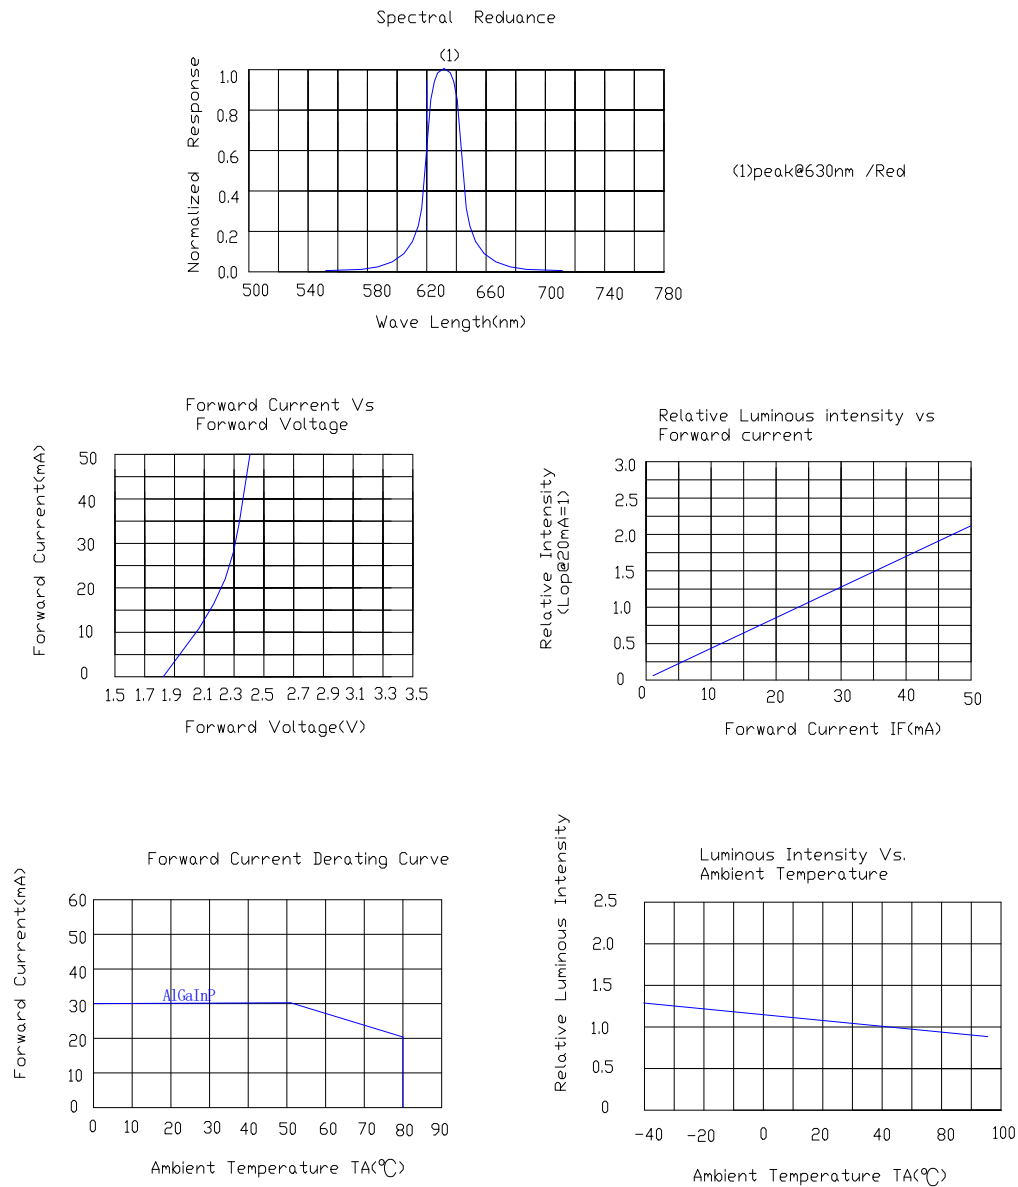


Radiation pattern.


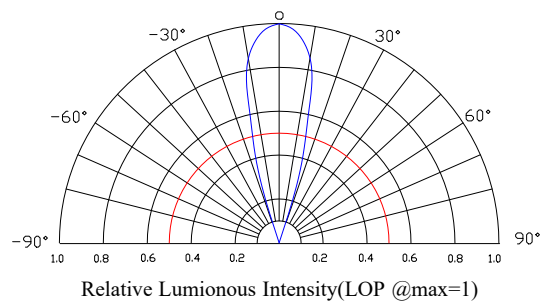


Model No.	FYL-3014SURC1A
Date / Rev.	2018.12.11 / A

■ LAMP PACKING.



3mm 1000PCS/Polybag

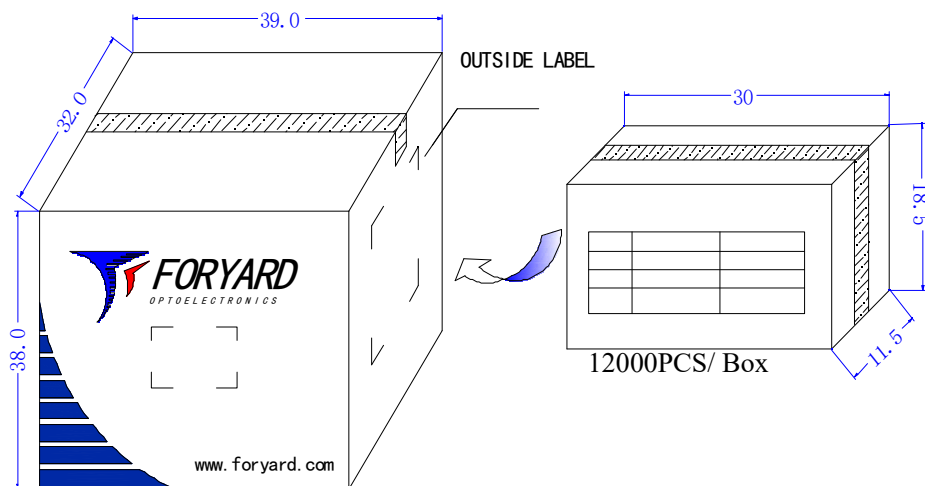

72000PCS/ Carton



OUTSIDE LABEL