


GNL-AL307SRD-25.4mm (5mm ROUND TYPE) Standard Brightness

ABSOLUTE MAXIMUM RATING:(Ta=25•)

Parameter			Unit
DC Forward Current	30		mA
Reverse Voltage	5		V
Reverse Current (Vr=5V)	10		μA
Peak Forward Current ,tw ,=1 msec Duty ,=1/20	150		mA
Operation Temperature	-40	+80	• •
Storage Temperature	-40	+100	• •
Solder Dip (5 seconds,1.6mm from body) Temperature	300	• • • •	• •

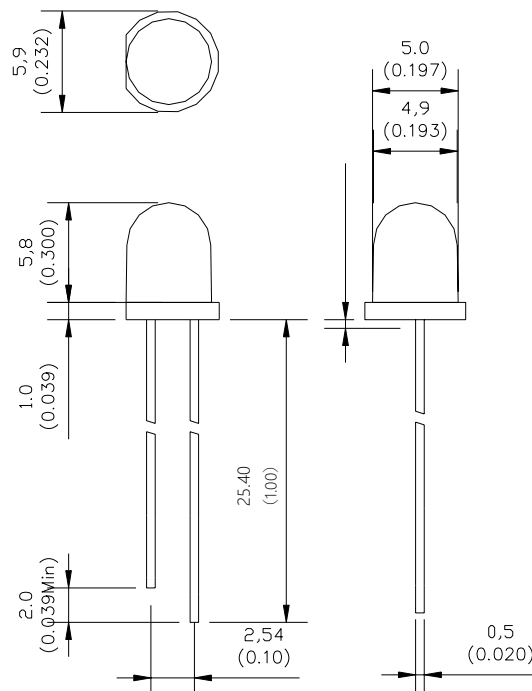

Feature:

- 1.Low power consumption
- 2.High efficiency and low cost
- 3.Versatile mounting on P.C.board or panel
- 4.Wide and narrow viewing angle
- 5.Long life sold state reliability

Description:

- 1.The shape of this series is round
- 2.General application is for indication,illumination,etc.
- 3.These LED lamps are available with a choice of defferent colors,light intensities,epoxy colors,etc.

Part Number	EMITTED COLOR		Lens Color	Peak Wavelength (nm)	Vf (v) Typ.	IV (If=20mA) mcd		View Angle 2• 4/2
						Min.	Typ.	
GNL- AL307HD	GaP	Red	Red Diffused	700	2.1	0.8	1.0	>180• •
GNL- AL307GD	GaP	Green	Green Diffused	565	2.1	7.0	8.0	>180• •
GNL- AL307YD	GaAsP	Yellow	Yellow Diffused	585	2.1	3.0	4.0	>180• •
GNL- AL307YD-E	GaAsP	Yellow	Orange Diffused	585	2.1	3.0	4.0	>180• •
GNL- AL307SRD	GaAlAs	Red	Red Diffused	660	1.9	20	25	>180• •
GNL- AL307SRD (4 * DIFFUSED)	GaAlAs	Red	Red Diffused	660	1.9	15	20	>180• •