


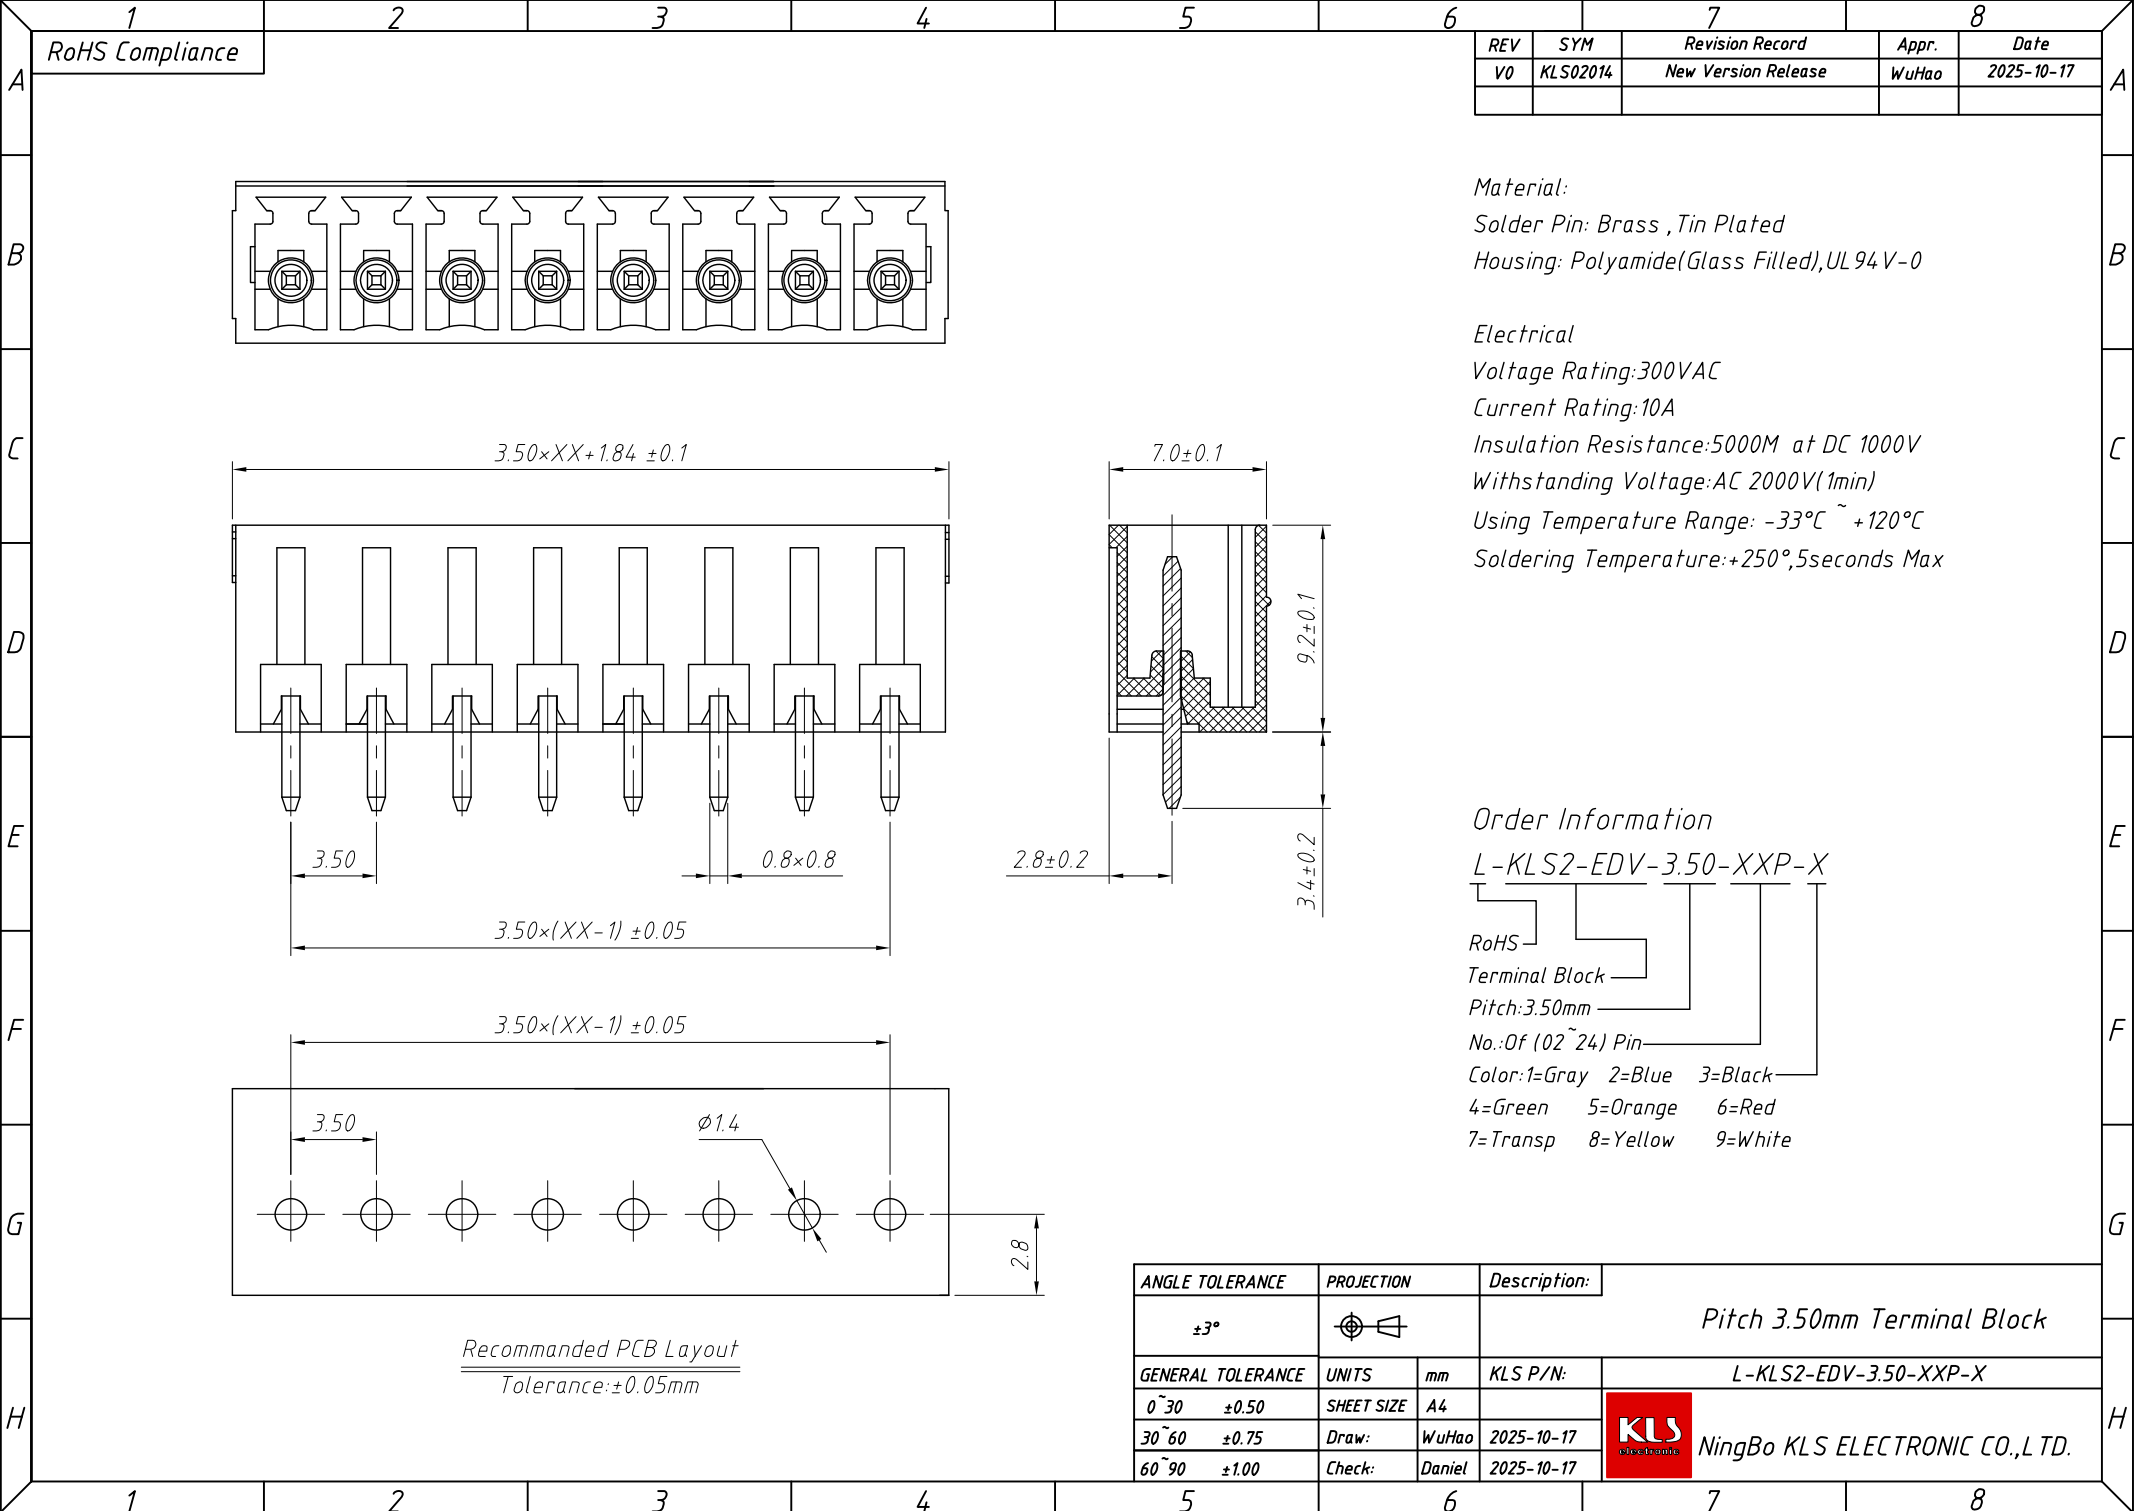

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02014	New Version Release	WuHao	2025-10-17

Material:
Solder Pin: Brass ,Tin Plated
Housing: Polyamide(Glass Filled),UL 94 V-0

Electrical
Voltage Rating:300VAC
Current Rating:10A
Insulation Resistance:5000M at DC 1000V
Withstanding Voltage:AC 2000V(1min)
Using Temperature Range: -33°C ~ +120°C
Soldering Temperature:+250°,5seconds Max

Order Information
L-KLS2-EDV-3.50-XXP-X

RoHS
Terminal Block
Pitch:3.50mm
No.:Of (02~24) Pin
Color:1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 3.50mm Terminal Block
GENERAL TOLERANCE	UNITS	mm
0~30	±0.50	SHEET SIZE A4
30~60	±0.75	Draw: WuHao 2025-10-17
60~90	±1.00	Check: Daniel 2025-10-17



NingBo KLS ELECTRONIC CO.,L TD.