

Button-type Li/MnO₂ Battery




Application

- 1. Mother board, control computer, notebook computer, remote control, etc.
- 2. Card electronic products, such as electronic dictionary. etc.
- 3. Small crafts, such as flash tourist shoes, necklaces, etc.
- 4. Electronic watch, flash light, etc.

Features

- 1, High voltage, single to 3V 2, Stable self-discharge rate
- 3, Storage capability 4, Wide temperature range
- 5, Safety and reliablity

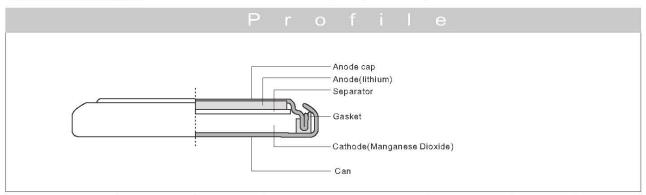

Model	Voltage/V	Capacity/mAh	Load/kΩ	End voltage/V	Temperature(Diameter/mm	Height/mm	Weight/g
CR1616	3	55	30.0	2.0	23±3	16	1.6	1.1
CR1620	3	75	47.0	2.0	23±3	16	2.0	1.3
CR1632	3	130	47.0	2.0	23±3	16	3.2	1.8
CR2016	3	90	30.0	2.0	23±3	20	1.6	1.7
CR2025	3	150	15.0	2.0	23±3	20	2.5	2.7
CR2032	3	220	15.0	2.0	23±3	20	3.2	3.2
CR2450	3	550	7.5	2.0	23±3	24.5	5.0	7.2
CR2477	3	750	2.0	2.0	23±3	24.5	7.7	10

Warning: Do not recharge, over discharge, short circuit, crush, disassemble, heat above work temperature, incinerate, or expose contents to water. Dispose of used batteries properly in case of explosion, burn and leakage.