


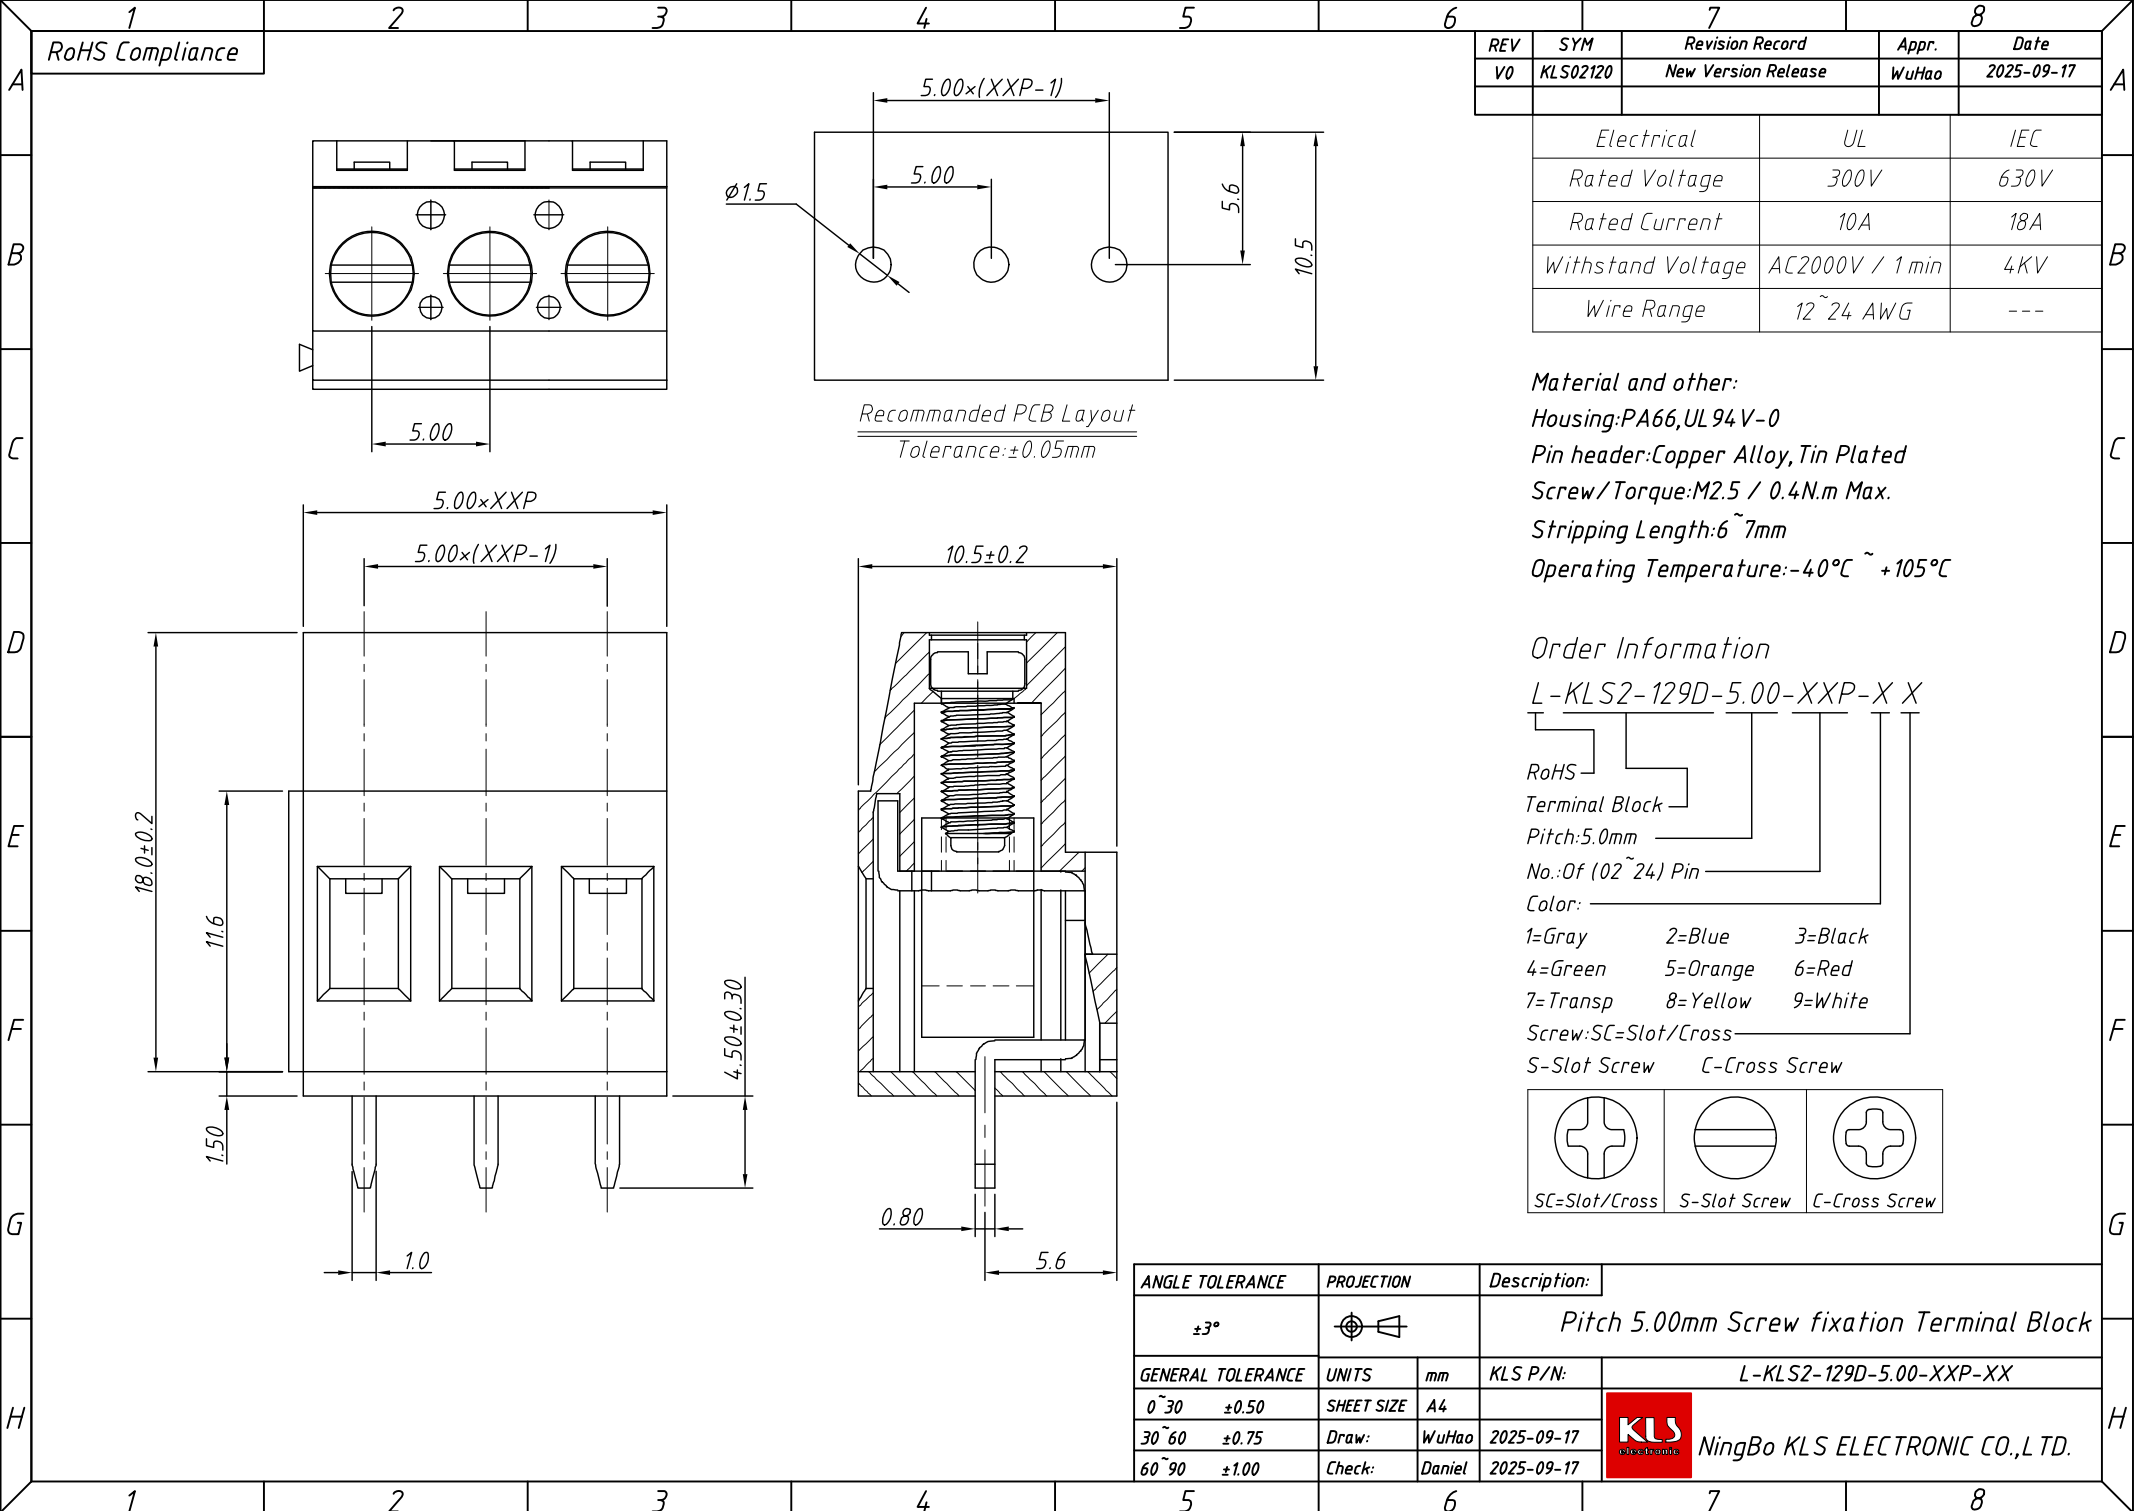


REV	SYM	Revision Record	Appr.	Date
V0	KLS02120	New Version Release	WuHao	2025-09-17
		Electrical	UL	IEC
		Rated Voltage	300V	630V
		Rated Current	10A	18A
		Withstand Voltage	AC2000V / 1 min	4KV
		Wire Range	12~24 AWG	---

Material and other:
Housing:PA66,UL 94 V-0
Pin header:Copper Alloy,Tin Plated
Screw/Torque:M2.5 / 0.4N.m Max.
Stripping Length:6~7mm
Operating Temperature:-40°C ~ +105°C

Order Information
L-KLS2-129D-5.00-XXP-X X

RoHS
Terminal Block
Pitch:5.0mm
No.:Of (02~24) Pin
Color:
1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw:SC=Slot/Cross
S-Slot Screw C-Cross Screw

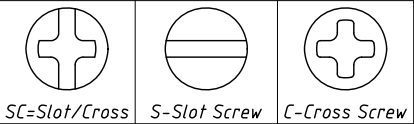

ANGLE TOLERANCE	PROJECTION	Description:
$\pm 3^\circ$		Pitch 5.00mm Screw fixation Terminal Block
GENERAL TOLERANCE	UNITS	mm
0~30	± 0.50	SHEET SIZE A4
30~60	± 0.75	Draw: WuHao
60~90	± 1.00	Check: Daniel

KLS

NingBo KLS ELECTRONIC CO.,LTD.