


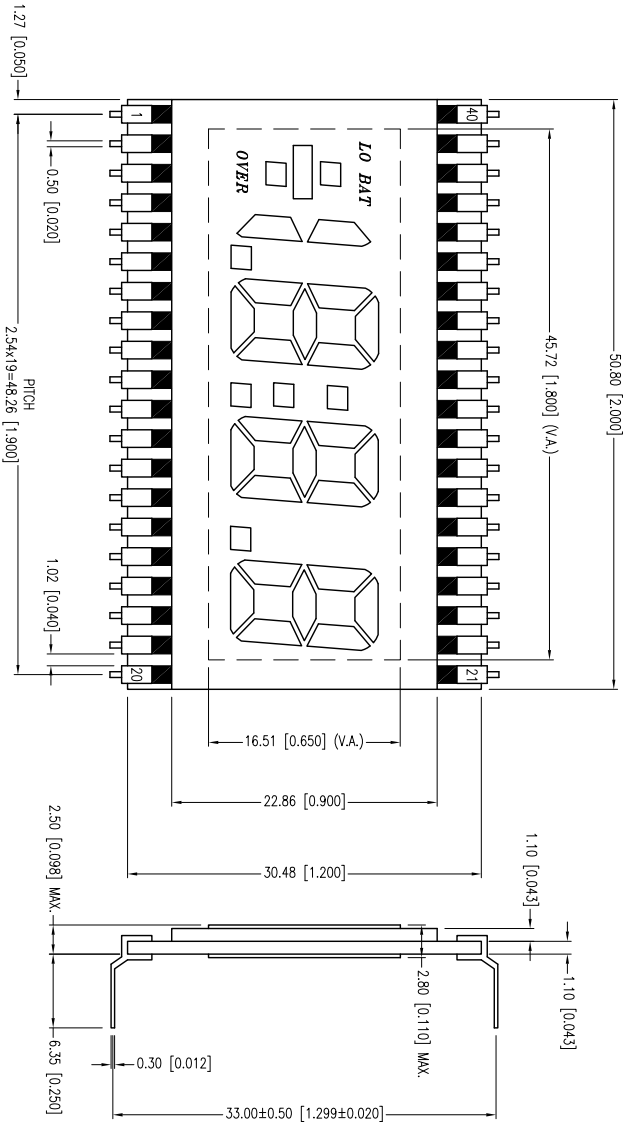
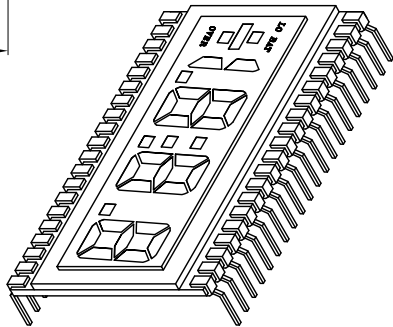


PART NUMBER	LCD-S3X1C50TR/A	REV.	B
DATE	02.07.07	E.C.N. NUMBER AND REVISION COMMENTS	REV. A
03.08.11	E.C.N. #11148.		
	E.C.N. #10BRDR. & REDRAWN.		B



CHARACTER DETAIL

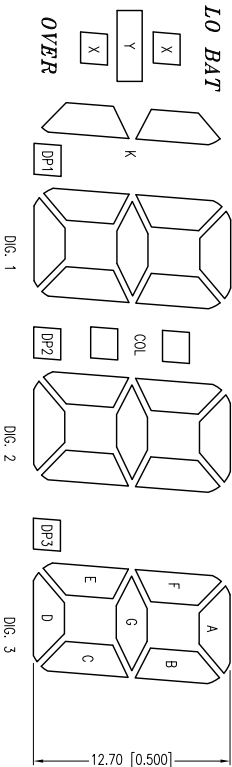

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	3.0~5.0V A.C.
OPERATING TEMP.	-0°C 10 +50°C
STORAGE TEMP.	-20°C 10 +70°C
DRAWING METHOD	STATIC
CONNECTION TYPE	40 PINS

PIN NO.	1	2	3	4	5	6	7	8	9	10
SEGMENT COM	Y	K	N/C	N/C	N/C	N/C	DP1	1E	1D	
PIN NO.	11	12	13	14	15	16	17	18	19	20
SEGMENT 1C	DP2	2E	2D	2C	DP3	3E	3D	3C	3B	
PIN NO.	21	22	23	24	25	26	27	28	29	30
SEGMENT 3A	3F	3E	2F	2E	2F	2E	2F	2E	2F	1A
PIN NO.	31	32	33	34	35	36	37	38	39	40
SEGMENT 1F	1E	1D	N/C	N/C	N/C	N/C	OVERLO	BAT	X	COM

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.029), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.= -0.00, DECIMAL PRECISION MAX.= +0.00

LUMEX
Creating LED and LCD Solutions Together™
290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

0.50" CHARACTER HEIGHT, 3 1/2 DIGIT LCD GLASS, TN, REFLECTIVE, 40 PINS.
THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.
CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 11.19.98 DRAWN BY: JC
PAGE: 1 OF 1 CHKD BY: --
SCALE: NTS APRVD BY: YA
UNIT: mm [INCH]

UNCONTROLLED DOCUMENT