

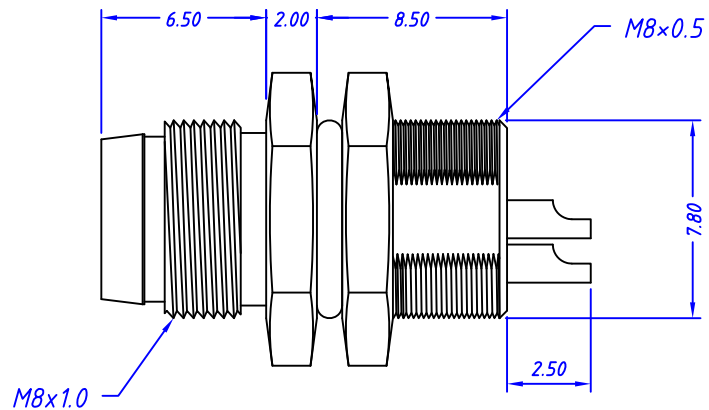


Front view

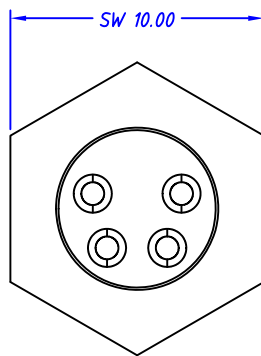

Back view

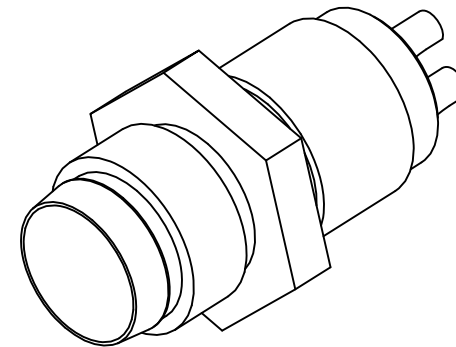

Electrical & Mechanical data

IP rating:IP67

Contacts resistance: $\leq 5\text{ m}\Omega$

Insulation resistance: $\geq 100\text{ M}\Omega$

Orientation: Soldering,Rear lock

Over mold/ Shell:Metal shell

Connector contacts:Brass with gold plated

Coupling nut/screw:Brass with nickel plated screw

Insert/ Housing: PA66 + GF

Sealing:O-ring

Temperature Range:-25°C ~ + 90°C

	3 Pin	4 Pin
Rated current	3A	4A
Rated voltage	60V	30V

ANGLE TOLERANCE			Description:
X. $\pm 5^\circ$			Soldering connector,Panel mount,
	PROJECTION		Rear lock, Automation technology, M12,Male
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
X. ± 0.60	SHEET SIZE	A4	KLS15-714A-M8-4M1-A
.X ± 0.38	Draw:	Daniel 2020-12-01	NingBo KLS ELECTRONIC CO.,L TD.
.XX ± 0.25	Check:	Daniel 2020-12-01	