



小信号快速开关二极管 Small Signal Fast Switching Diodes


■特征 Features

- V_R 75V
- I_{FAV} 150mA

■用途 Applications

- 极端的快速开关 Extreme fast switches

■外形尺寸和印记 Outline Dimensions and Mark

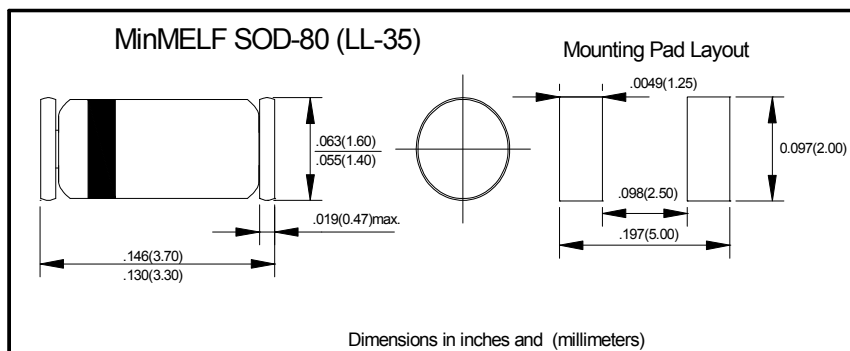

■极限值（绝对最大额定值）

Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	最大值 Max
反向重复峰值电压 Repetitive peak reverse voltage	V_{RRM}	V		100
反向电压 Reverse voltage	V_R	V		75
正向浪涌峰值电流 Peak forward surge current	I_{FSM}	A	$t_p=1\mu s$	2
正向重复峰值电流 Repetitive peak forward current	I_{FRM}	mA		500
正向持续电流 Forward continuous current	I_F	mA		300
正向平均电流 Average forward current	I_{FAV}	mA	$V_R=0$	150
功率消耗 Power dissipation	P_{tot}	mW		500 ¹⁾
典型热阻 Thermal resistance	R_{thJA}	°C/W	结到环境 junction to ambient air	300 ¹⁾
最大结温 Maximum junction temperature	T_j	°C		175
存储温度范围 Storage temperature range	T_{stg}	°C		-65 to +175

备注: Notes:

¹⁾有效提供, 电极保持在环境温度

Valid provided that electrodes are kept at ambient temperature

■电特性 (T_a=25℃ 除非另有规定)

Electrical Characteristics (T_a=25℃ Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	最大值 Max
正向电压 Forward voltage	V _F	mV	I _F =50mA	1000
反向电流 Reverse current	I _R	nA	V _R =20V	25
	I _R	μA	V _R =20V, T _j =150℃	50
	I _R	μA	V _R =75V	5
击穿电压 Breakdown voltage	V _(BR)	V	I _R =100μA, t _p /T=0.01, t _p =0.3ms	100(min)
二极管电容 Diode capacitance	C _D	pF	V _R =0, f =1MHz, V _{HF} =50mV	4
反向恢复时间 Reverse recovery time	t _{rr}	ns	I _F = I _R =10mA, i _R =1mA	8
	t _{rr}	ns	I _F = 10mA, V _R =6V, i _R =0.1×I _R , R _L =100Ω	4

■特性曲线 (典型) Characteristics(Typical)

