


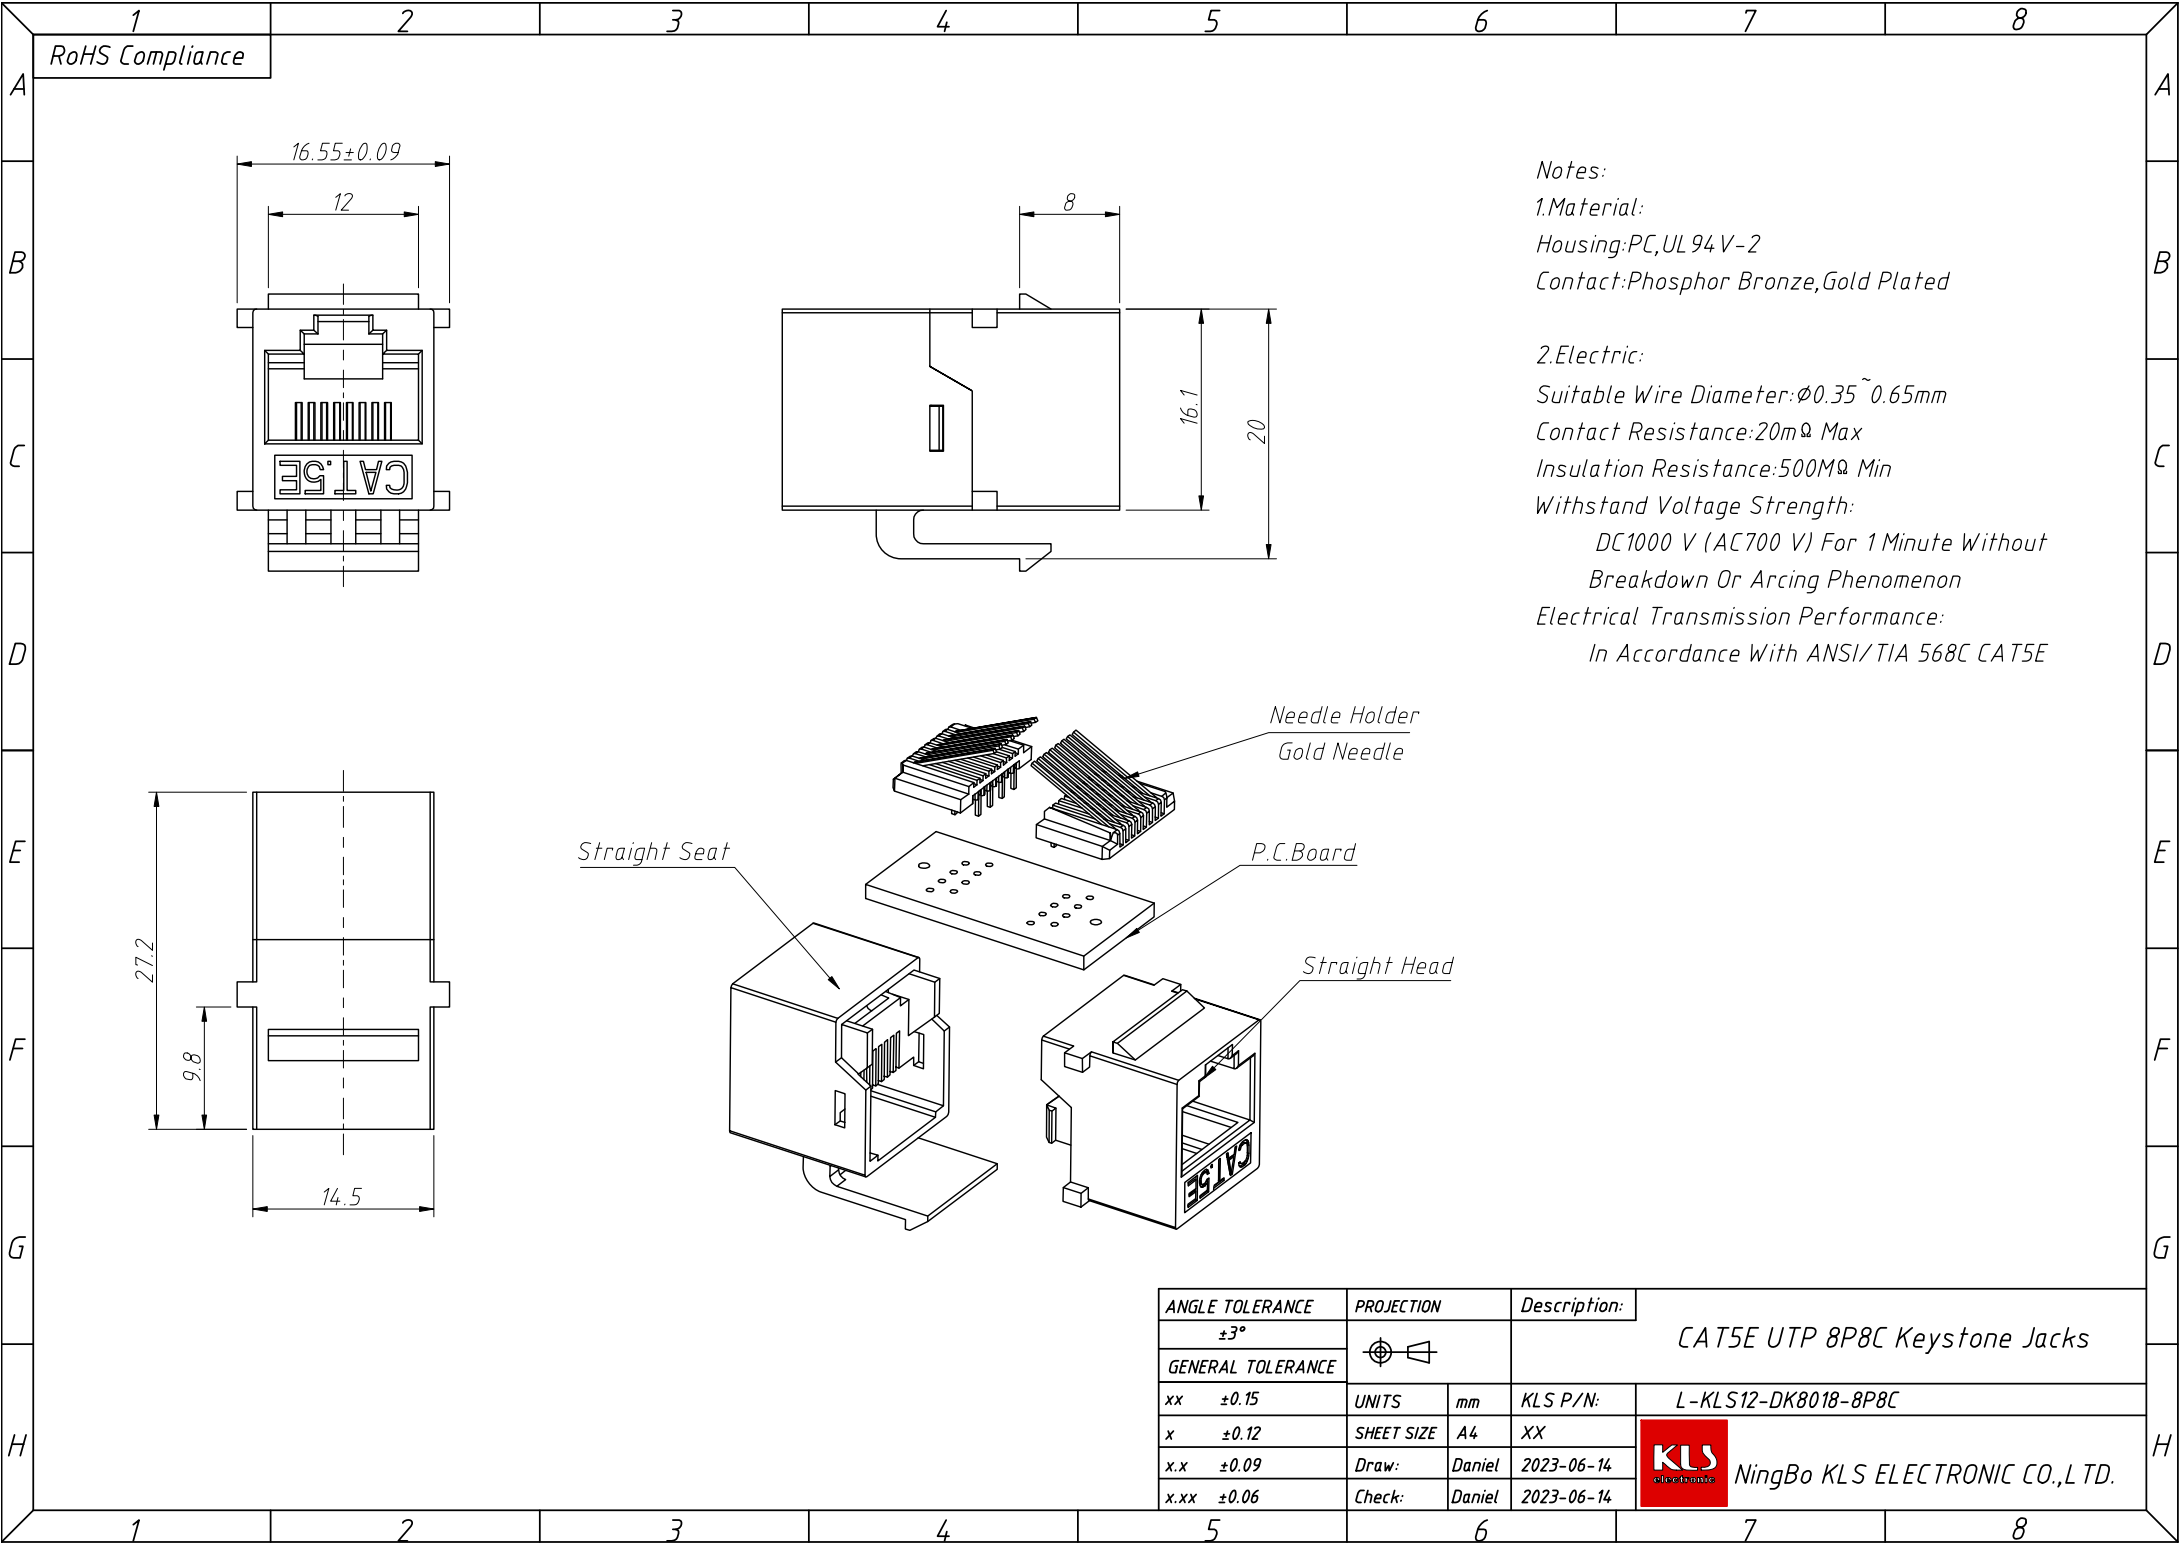

Notes:

1.Material:

Housing:PC,UL 94 V-2

Contact:Phosphor Bronze,Gold Plated

2.Electric:

Suitable Wire Diameter: $\phi 0.35 \sim 0.65$ mm

Contact Resistance: $20m\Omega$ Max

Insulation Resistance: $500M\Omega$ Min

Withstand Voltage Strength:

DC1000 V (AC700 V) For 1 Minute Without Breakdown Or Arcing Phenomenon

Electrical Transmission Performance:

In Accordance With ANSI/TIA 568C CAT5E

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				CAT5E UTP 8P8C Keystone Jacks	
GENERAL TOLERANCE					
xx	±0.15	UNITS	mm	KLS P/N:	L-KLS12-DK8018-8P8C
x	±0.12	SHEET SIZE	A4	XX	 NingBo KLS ELECTRONIC CO.,L TD.
x.x	±0.09	Draw:	Daniel	2023-06-14	
x.xx	±0.06	Check:	Daniel	2023-06-14	