


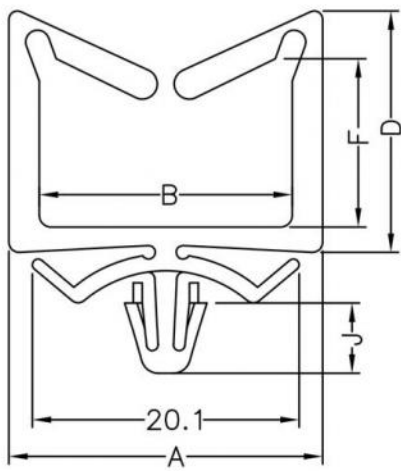

HOLE : ØG  
THICKNESS: T

| A    | B     | C   | D    | F    | G     | J   | T   |
|------|-------|-----|------|------|-------|-----|-----|
| 23.6 | 19.05 | 5.6 | 18.2 | 12.7 | Ø4.75 | 5.3 | 1.2 |

|   |               |
|---|---------------|
| G | MOUNTING HOLE |
| T | THICKNESS     |

- 1.It is normal if it is shrinking.
- 2.All measurement does not include gate which raises under 0.3mm.



NINGBO KLS ELECTRONIC CO.,LTD.

|                                |              |            |                  |  |
|--------------------------------|--------------|------------|------------------|--|
| PART NUMBER<br>L-KLS8-0310A-01 |              |            | SPEC. DWG.       |  |
| TITLE<br>WIRE MOUN             |              |            |                  |  |
| MATERIAL<br>NYLON 66(UL) 94V-0 |              |            | COLOR<br>NATURAL |  |
| SIZE<br>A4                     | SCALE<br>2:1 | UNIT<br>mm | CHECK<br>Z.C     |  |

| PART NO         | A    | B     | C   | D    | F    | G     | J   | T   |
|-----------------|------|-------|-----|------|------|-------|-----|-----|
| L-KLS8-0310A-01 | 23.6 | 19.05 | 5.6 | 27.1 | 21.6 | Ø4.75 | 5.3 | 1.2 |

[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.