

HALOGEN-FREE DESOLDERING WICKS CPN SERIES

- Available in packs of 10 only.
- Does not intentionally contain halogens.
- RMA non-wash flux is used. (J-STD-004: ROLO)
- Plain-knitting wick recommended for lead-free applications with high heat conduction.
- Anti-static case.
- Contains silica gel to reduce quality degradation.
- With convenient zipper bag.


HALOGEN-FREE

- Less than 1,000 ppm each of chlorine, bromine, fluorine and iodine content (JEITA Standards)



FOR LEAD-FREE DESOLDERING

Our thin and soft desoldering wire's flat braid has efficient thermal transmission. Removes solder faster with better heat response than previous wicks. Recommended for lead-free solder with high heating load.

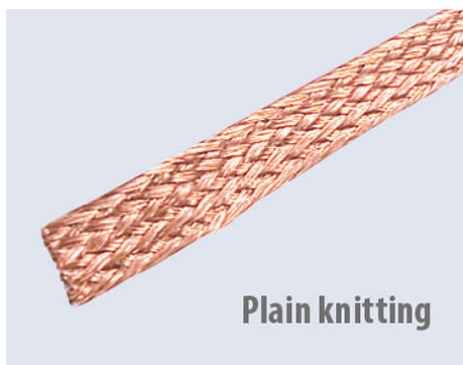

SPECIFICATIONS

Rosin	Length	Width					Quantity
		1.5mm	2.0mm	2.5mm	3.0mm	3.5mm	
HALOGEN-FREE	1.5m		CPN-2015-10				10
					CPN-3015-10		10
RMA flux	1.5m	CP-1515					1
		CP-1515-10					10
			CP-2015				1
			CP-2015-10				10
				CP-2515			1
				CP-2515-10			10
					CP-3015		1
					CP-3015-10		10
						CP-3515	1
						CP-3515-10	10
						1	
						10	
	2.0m	CP-15Y					1
			CP-20Y				1
				CP-25Y			1
					CP-30Y		1
						CP-35Y	1
	13m						1
	15m					CP-35B	1
	20m			CP-25B			1
					CP-30B		1
	30m	CP-15B					1
			CP-20B				1