
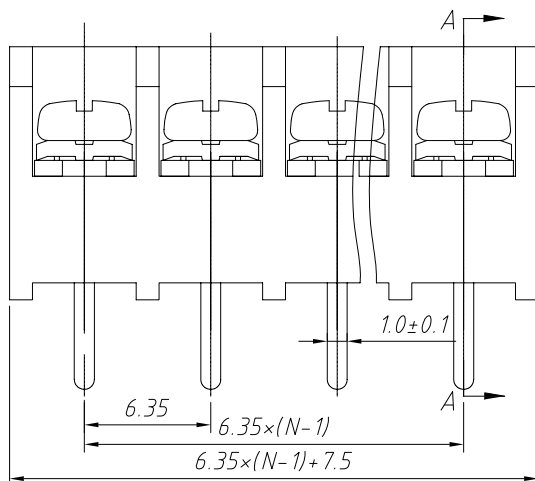
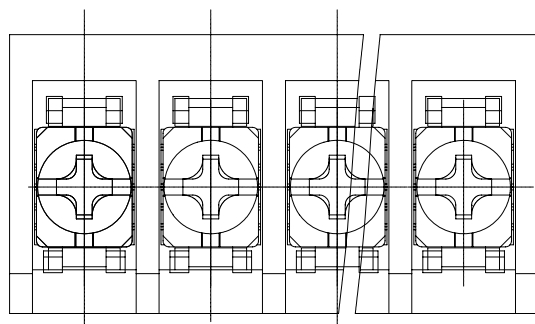


PCB LAYOUT

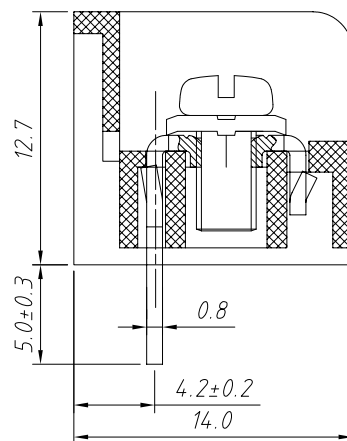

SECTION A-A

Material

Screw: M2.5,Steel,Ni Plated
Pin header: Brass, Tin Plated
Housing: PA66, UL94V-0,Black

Electrical

Rated voltage: 300V
Rated current: 10A
Wire range: 22~16AWG 1.5mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min

Mechanical

Temp. Range: -40 °C ~ +105 °C
Torque: 0.5Nm (4.43Lb.in)

Order Information

L-KLS2- 56 B - 6.35- XXP-B
Color: B-Black
No.: of Pole
Pitch: 6.35mm
Pin Type:
Barrier Terminal Block
RoHS

ANGLE TOLERANCE		Description:	
X. ±5°		Barrier TERM BLOCK 6.35MM	
.X ±3°	PROJECTION:		
GENERAL TOLERANCE	UNITS: mm	KLS P/N:	KLS2-56B-6.35-XXP-B
X. ±0.60	SHEET SIZE: A4		NingBo KLS ELECTRONIC CO.,LTD.
.X ±0.38	Draw by: Daniel		
.XX ±0.25	Check by: Daniel		
		2018-02-26	
		2018-02-26	