


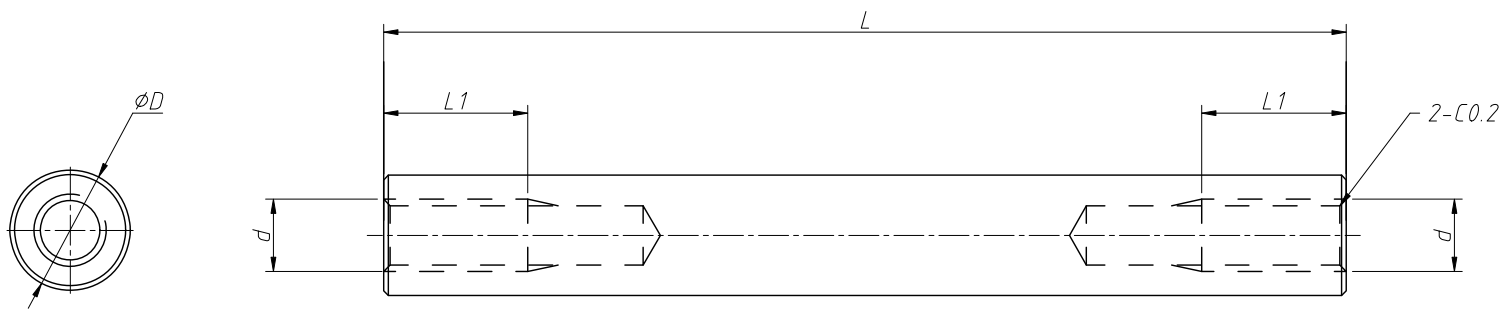

ITEM	d	D	L	L1	Plated:-(A)
L-KLS8-PCSS-M2-E5.0-LXX	M2	5.0	4-60mm	4-20 allows for penetration, 21-60:6mm	Blank:Clean -A:Ni Plated
L-KLS8-PCSS-M2-E5.0-LXX-A	M2				
L-KLS8-PCSS-M2.5-E5.0-LXX	M2.5				
L-KLS8-PCSS-M2.5-E5.0-LXX-A	M2.5				
L-KLS8-PCSS-M3-E5.0-LXX	M3				
L-KLS8-PCSS-M3-E5.0-LXX-A	M3				

Notes:
1.Materials:Brass H59,
Clean Or Ni Plated
2.All Unmarked Chamfers are C0.2 Max
3.All Unmarked Tolerances are GB/T1804-m

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Brass Threaded Spacer
GENERAL TOLERANCE	UNITS	mm
.x ±0.30	SHEET SIZE	A4
.xx ±0.20	Draw:	Song
.xxx ±0.10	Check:	Daniel

KLS

electronic

NingBo KLS ELECTRONIC CO.,LTD.