





Crystal Units

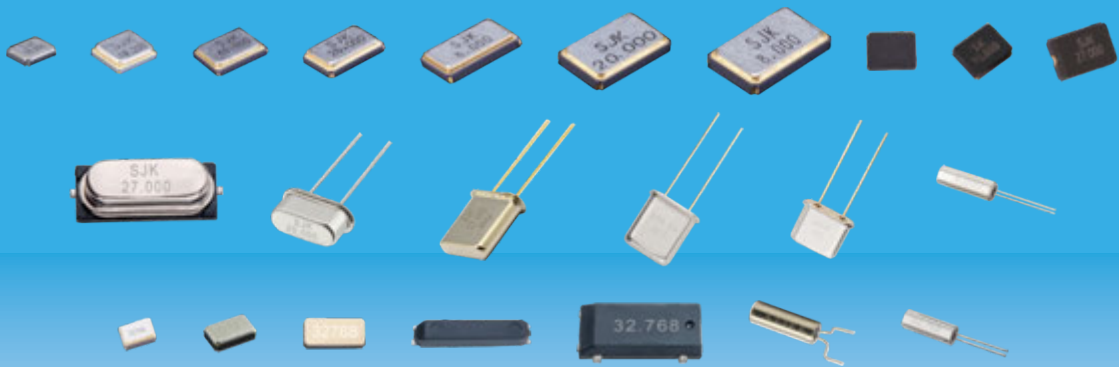

Example: SJK-7F-26.000-9-10-80-C-15

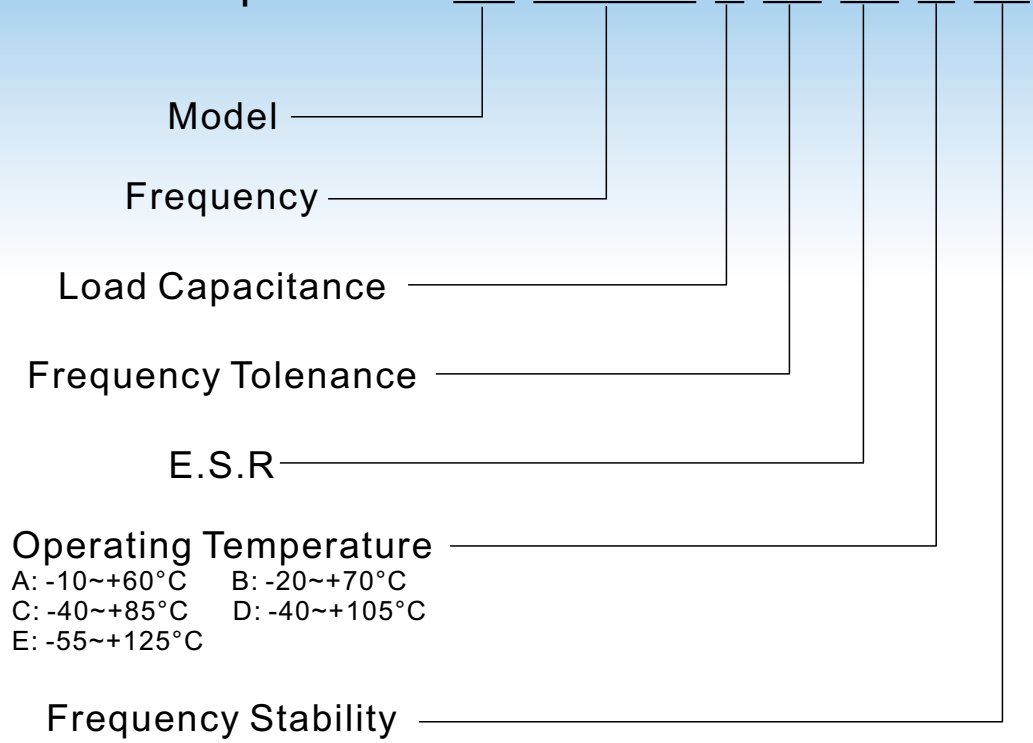

Features

- Surface mounting type crystal resonators
- A great number of standard frequencies.
- Wide frequency from 3MHz up to 100MHz.
- Highly mass production capability.
- High frequency pullability equivalent series resistance.
- The best choice of PC, peripherals, STB, LCDM, Communication, Cable modem, etc.
- RoHS Compliant / Pb-Free.



Electrical Specifications



Item /Type	6C (HC-49SMD crystal resonator)
Frequency Range	3~100MHz
Frequency Tolerance(at 25 °C)	±30ppm, or specify
Frequency Stability Over Operating Temperature Range	±30ppm, or specify
Operating Temperature Range	-20~+70°C, or specify
Shunt Capacitance(Co)	7pF Max.
Drive Level	1~500μW Max.(100μW Typical)
Load Capacitance	16pF, 20pF,30pF, 32pF, or specify
Aging (at 25°C)	±3ppm / year Max.
Storage Temperature Range	-55~+125°C
Packing Unit	1000pcs

Equivalent Series Resistance(ESR)



Fundamental		3rd Overtone	
3.0~3.686MHz	200 Ω Max.	27~30MHz	100 Ω Max.
3.686~5MHz	150 Ω Max.	30~50MHz	80 Ω Max.
5~10MHz	80 Ω Max.	50~100MHz	60 Ω Max.
10~14MHz	40 Ω Max.		
14~30MHz	30 Ω Max.		

Dimensions

Units:mm



TYPE	H
SMD	4.0±0.2
SSMD	3.0±0.2

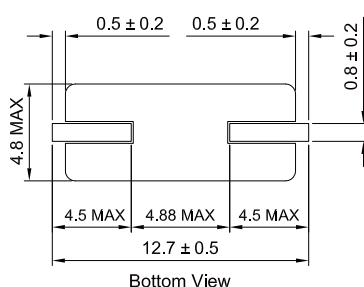

Top View Suggested Layout