

**Surface Mount Schottky Barrier Rectifier**

Reverse Voltage - 20 to 200V

Forward Current - 5.0A

**FEATURES**

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

**MECHANICAL DATA**

- Case: SMC
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.22g / 0.0077oz

**PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View

Marking Code: SS52 ~ SS520

Simplified outline SMC and symbol

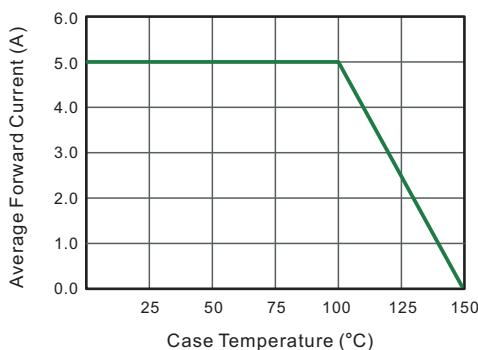
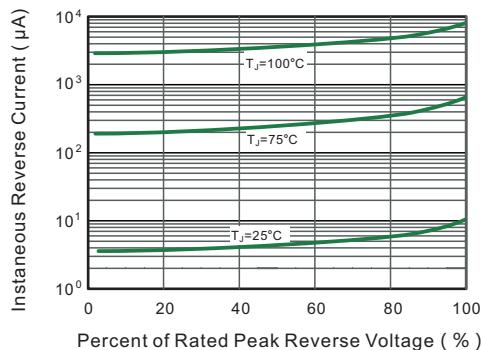
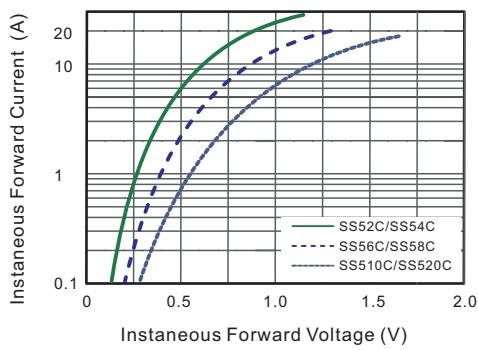
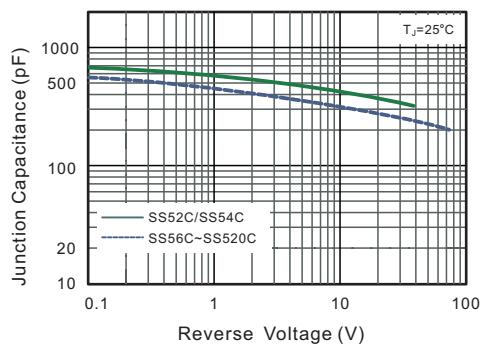
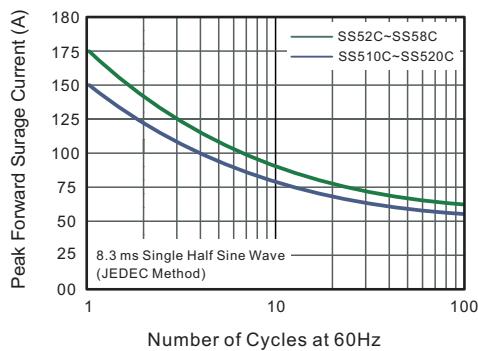
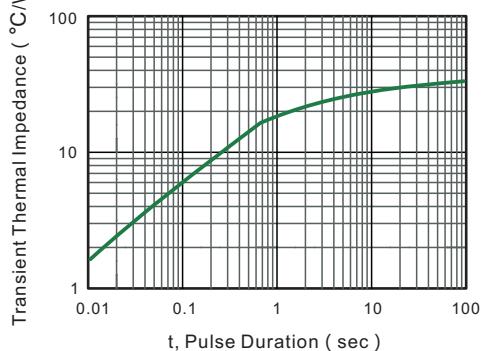
**Absolute Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

Parameter	Symbols	SS52SMC	SS54SMC	SS56SMC	SS58SMC	SS510SMC	SS512SMC	SS515SMC	SS520SMC	Units						
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	20	40	60	80	100	120	150	200	V						
Maximum RMS voltage	V <sub>RMS</sub>	14	28	42	56	70	84	105	140	V						
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	40	60	80	100	120	150	200	V						
Maximum Average Forward Rectified Current	I <sub>F(AV)</sub>	5.0								A						
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I <sub>FSM</sub>	175				150				A						
Max Instantaneous Forward Voltage at 5 A	V <sub>F</sub>	0.55		0.70		0.85				V						
Maximum DC Reverse Current T <sub>a</sub> = 25°C at Rated DC Reverse Voltage T <sub>a</sub> = 100°C	I <sub>R</sub>	1.0 50								mA						
Typical Junction Capacitance <sup>(1)</sup>	C <sub>j</sub>	600		400						pF						
Typical Thermal Resistance <sup>(2)</sup>	R <sub>θJA</sub>	35								°C/W						
Operating Junction Temperature Range	T <sub>j</sub>	-55 ~ +150								°C						
Storage Temperature Range	T <sub>stg</sub>	-55 ~ +150								°C						

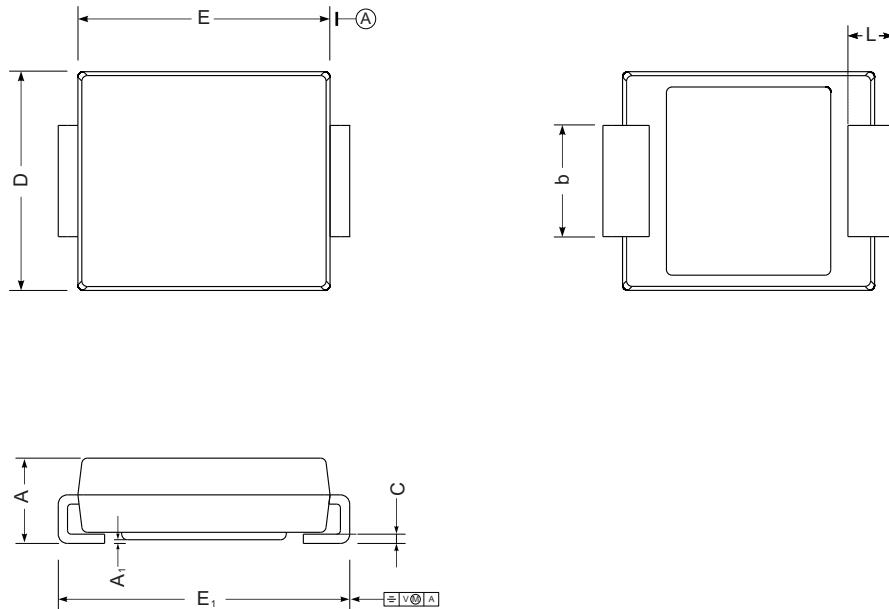
(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

**Fig.1 Forward Current Derating Curve**

**Fig.2 Typical Reverse Characteristics**

**Fig.3 Typical Forward Characteristic**

**Fig.4 Typical Junction Capacitance**

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

**Fig.6- Typical Transient Thermal Impedance**


## PACKAGE OUTLINE

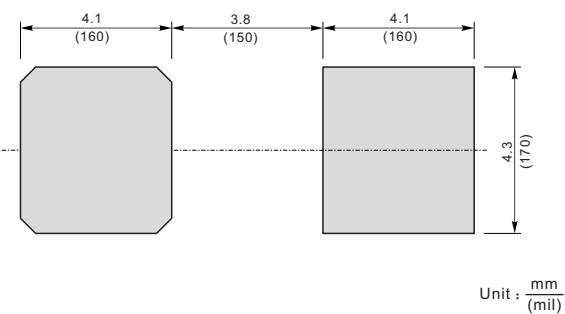
Plastic surface mounted package; 2 leads



SMC mechanical data

UNIT		A	E	D	E <sub>1</sub>	A <sub>1</sub>	C	L	b
mm	max	2.62	7.0	6.2	8.0	0.21	0.31	1.6	3.25
	min	2.00	6.5	5.6	7.6	0.05	0.15	0.9	2.75
mil	max	103	276	244	315	8.3	12	63	128
	min	79	256	220	299	2.0	5.9	35	108

### The recommended mounting pad size



Unit :  $\frac{\text{mm}}{(\text{mil})}$

### Marking

Type number	Marking code
SS52 SMC	SS52
SS54 SMC	SS54
SS56 SMC	SS56
SS58 SMC	SS58
SS510 SMC	SS510
SS512 SMC	SS512
SS515 SMC	SS515
SS520 SMC	SS520