


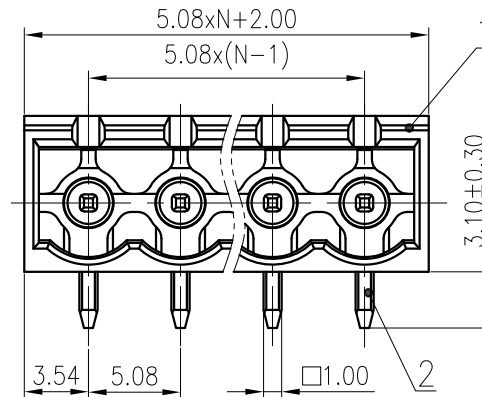
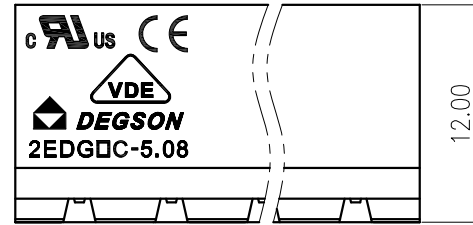


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

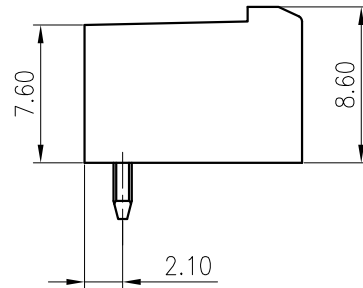

PCB LAYOUT

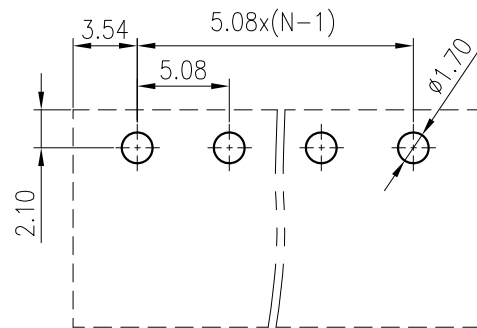

2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
VDE 标准/VDE Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~24P		
使用温度范围/Operating temperature(°C)	-40°C~+105°C		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:	SURFACE: /		
MAT NO.:			
STATUS:			
APPD: LanChH 2020.03.24	NAME: 宁波高松电子有限公司		
CHKD: GongYZh 2020.03.24	NINGBO DEGSON ELECTRICAL CO., LTD		
DRFT: LiY 2020.03.24	2EDGRC-5.08-XXP-1Y-100A(H)		
SIZE: A4	DRAWING NO.: 10001580	REV	TO
TYPE: CUSTOMER DRAWING	SCALE: 2.5:1	SHEET	1/1