


REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	2014-12-05

NOTES:

1. Rating:300V 15A;
2. Insulation Withstands Voltage:
AC2000V/MIN
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Screw Torque Vlaue:0.4N.m
6. Suitable Electric Wire: 28~12AWG
7. "★" is the important dimension.








KSE - 2EDGK - 5.00 - XXP - (T) - (S)

Slot screw

Block: steel, Zn plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SK	DATE	2014-12-05	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	2.5:1
APP.		DATE		NAME	KSE-2EDGK-5.00-XXP
				DWGNO.	

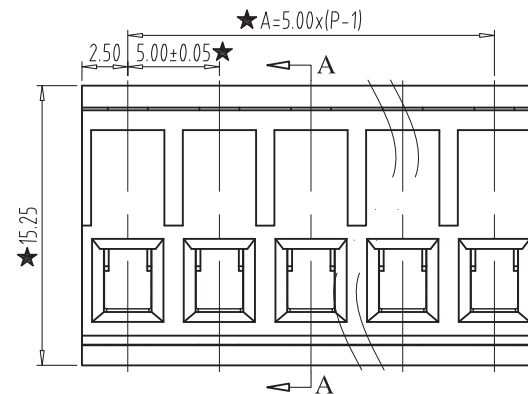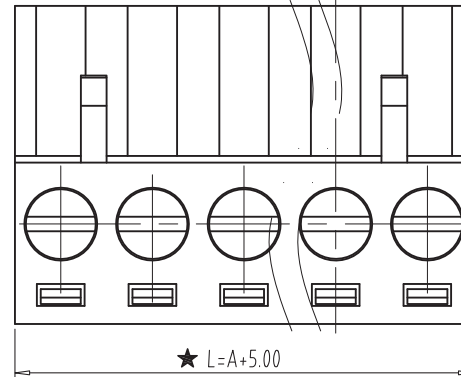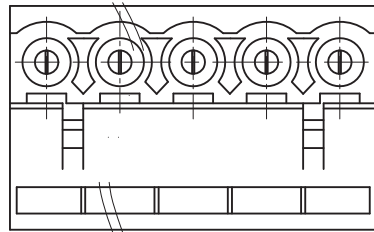

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥	≡	—	//			
	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10 all	over 0 to 100	over 100 to 150	over 150 to 200		
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	
	C									E									I		J		K		L