

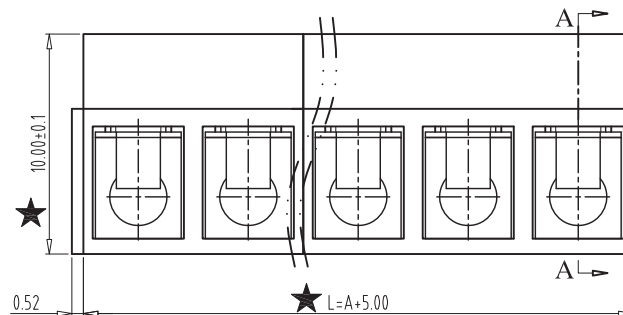




SECTION:A-A

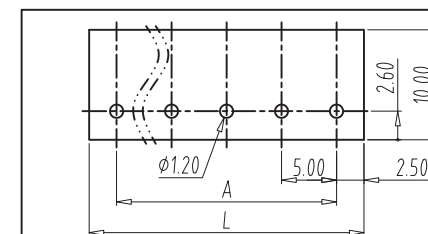

NOTES:

1. Rating:300V 10A;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance: 500MΩ or more at DC500V
4. Using Temperature Range: -40°C/+105°C
5. Screw Torque Vlaue:0.4N.m
6. Suitable Electric Wire: 14-22AWG
7. RoHS compliance
8. "★" the important dimension.

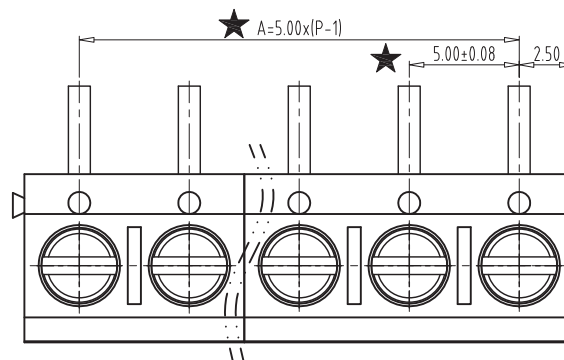

PCB LAYOUT
S=3:2

A	Total Pitch Tolerances								Nominal dimension range								$\perp$		$\equiv$		---		$//$	
	in mm								in mm															
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over			
	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	0	100	over	
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	over	
	30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	10		100	150	
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

2			P	BRASS	Tin Plated
3			P	STAINLESS STEEL	
2			P	STEEL	M2.5/Zn Plated
1			/	PA66(V0)	02/03P
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	HUITAO	DATE 13.10.14	UNITS	mm	SHEET/OF 1 / 1
CHK.		DATE	SCALE	3 : 1	A4
APP.		DATE			
KEEN SIDE ELECTRONICS			NAME	KSE-301R-5.0-XX	
			DWGNO.		