

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS17048	New Version Release	Jenny	2024-04-07

Material:

Antenna Shell:TPEE,Black

Connector:SMA Plug/Standard

Electric:

Frequency Range:824-960/1710-1990MHZ

Band Width:136/280MHz

Vswr:≤3.5

Gain:-4DBi(Low Frequency)

1DBi(High frequency)

Impedance:50 OHM

Polarization:Vertical

Radiation:Omni Directional

Power:50W Max

Connector:SMA-J


Dimensions:48mm×8mm

Installation:Screw

Temperature:-40℃~+80℃

Notes:

- 1.The Assembly Of Each Component Should Be Firm And Reliable
- 2.The Signal Parameters Of The Finished Product Must Reach The Specified Value
- 3.The Product Needs To Be Packaged In Quantity According To The Requirements, And There Should Be No Obvious Signs During Transportation Phenomena Such As Compression Deformation

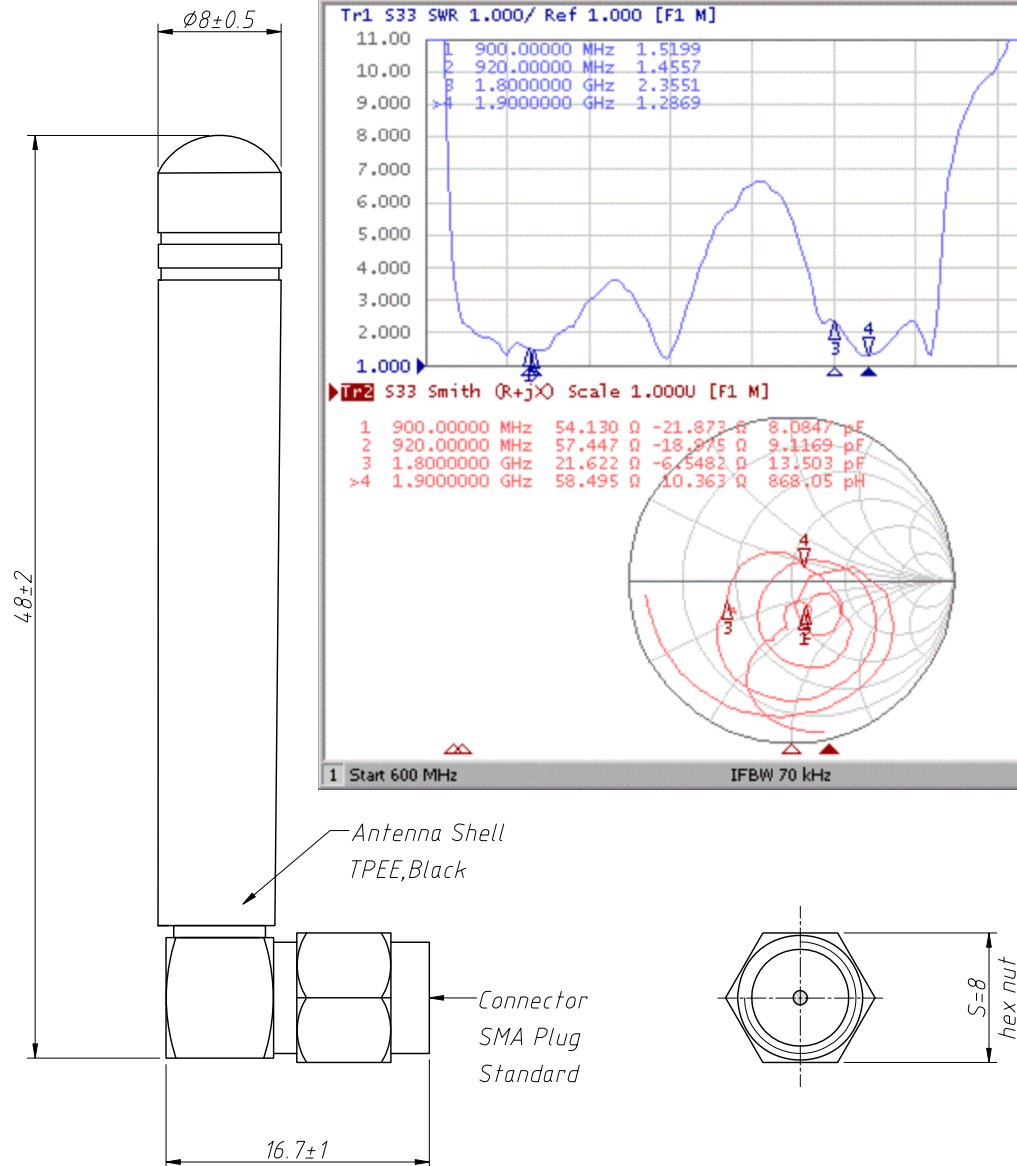

ANGLE TOLERANCE	PROJECTION	Description:	GSM Antenna, 48mm,SMA R/A	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-GSM-02-MR-48MM
x.x ±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,LTD.
x.xx ±0.20	Draw:	Jenny	2024-04-07	
x.xxx ±0.10	Check:	Daniel	2024-04-07	