

YS6V-E SERIES



Input: 85-265VAC 50/60Hz
Output Voltage: 5V-36V DC
Rated Power: 6W max

Features

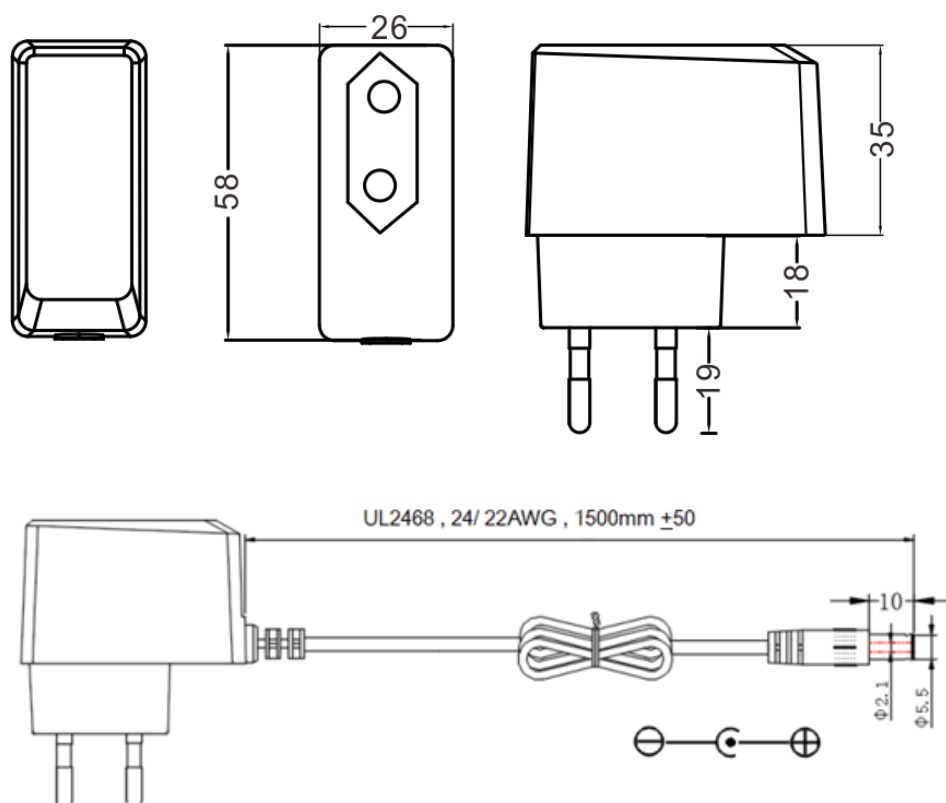
Univeral AC input/ Full range
Energy efficiency level VI
Leakage Current: < 0.25mA
Extremely low leakage current
Protection: Over load/Over voltage/Short circuit
Withstand voltage : 3KV
Life Warranty: 3 years

Application

Digital equipment
Electric curtains
Kitchen appliances
Household appliances



■ Dimensions and Installation

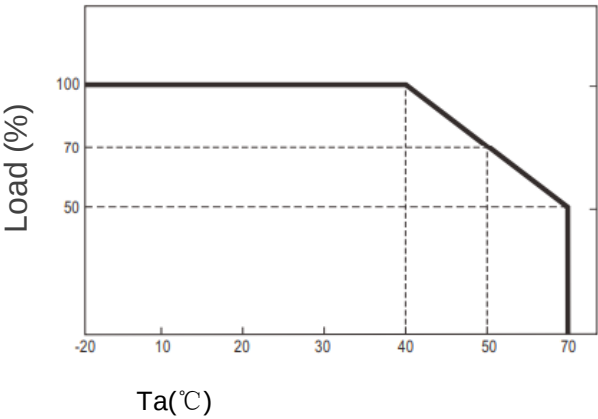


YS6V-E SERIES

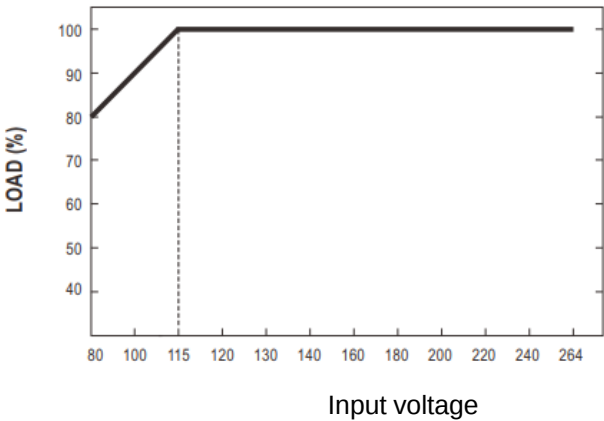
MODEL DETAIL SPEC.		YS6V-0501200E	YS6V-0601000E	YS6V-0900660E	YS6V-1200500E	YS6V-1500400E	YS6V-2400250E
INPUT	Input Voltage range:	85-265VAC					
	Input Frequency:	50/60Hz					
	Inrush Current:	65A/230VAC					
	AC Current:	0.5A/230VAC					
	Leakage Current:	< 0.25mA/240VAC					
	Efficiency:	75%	77%	80%	80%	81%	82%
OUTPUT	DC Voltage:	5V	6V	9V	12V	15V	24V
	Rated Current:	1.2A	1A	0.66A	0.5A	0.4A	0.25A
	Rated Power:	6W	6W	6W	6W	6W	6W
	Voltage Tolerance:	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%
	Ripple and Noise:	75mVp-p	75mVp-p	90mVp-p	120mVp-p	150mVp-p	200mVp-p
	Line Regulation:	±3%					
	Load Regulation:	±5%	±5%	±5%	±5%	±5%	±5%
	Setup, Rise, Hold Up time:	1000ms, 30ms/25ms 230VAC at full load					
ENVIRONMENTAL	Operating Temperature:	-20 ~ +70 (Refer to "Derating Curve")					
	Storage Temp:	-40℃ ~ 85℃					
	Storage Humidity:	10 ~ 95% RH					
	Working Humidity:	20 ~ 95% RH non-condensing					
PROTECTION	Over Load:	Above 110-180% rated output power					
		Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	Over Voltage:	>120% rated output power					
		Protection type: Shut down o/p voltage, re-power on to recover					
	Short Circuit :	Shut down o/p voltage, re-power on to recover					
SAFETY & EMC	Safety Regulations:	TUV ,EN62368-1					
	Withstand Voltage:	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	Isolation Resistance:	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃/ 70% RH					
	EMC Emission:	Compliance to EN55032 (CISPR32), Class B, EN61000-3-2,-3,					
	EMC Immunity:	EN61000-4-2,3,4,5,6,8,11					
OTHER	MTBF:	500Khrs min. MIL-HDBK-217F(25℃)					
	Size:	58*26*35mm					
	Weight:	70g / pcs					
	Packaging:	100PCS/CTN					

YS6V-E SERIES

Deduction curve
and temperature





Minus output
and input voltage curves



■ DC output plug

Standard plug: D1M









D1M	Pin Assignment
	
	Outside  Inside
	-V not connected to AC FG(standard) -V connected to AC FG(optional)

UL2468 22AWG 1200+150/-0mm for 5-9V
UL2468 24AWG 1800+150/-0mm for 12V~48V




YS6V-E SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   (Straight)  (Right-angled)	D1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)		
	D1L	5.5	2.5	9.5			
	D1M	5.5	2.1	11.0			
	D1IR	5.5	2.5	9.5			
	D1JR	5.5	2.1	11.0			
	D1LR	5.5	2.5	9.5			
	D1MR	5.5	2.5	11.0			
Barrel Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   (Straight)  (Right-angled)	D2I	5.5	2.1	9.5	None		
	D2J	5.5	2.1	11.0			
	D2L	5.5	2.5	9.5			
	D2M	5.5	2.1	11.0			
	D2IR	5.5	2.5	9.5			
	D2JR	5.5	2.1	11.0			
	D2LR	5.5	2.5	9.5			
D2MR	5.5	2.5	11.0				
Lock Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   Floating Locking SWITCHCRAFT original or equivalent	D2S(S761K)	5.53	2.03	12.06	None		
	D2K(761K)	5.53	2.54	12.06			
	D2C(S760 K)	5.53	2.03	9.52			
	D2D(760K)	5.53	2.54	9.52			
Center Pin Style		Type No.	A	B	C	D	Quick Adapter Accessory
			OD	ID	L	Center Pin	
   EIAJ equivalent	D4A	5.5	3.4	11.0	1.0	Available (Current rating: 7.5A max.)	
	D4B	6.5	4.4	11.0	1.4		
	D4C	7.4	5.1	11.0	0.6		
Min. Pin Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   EIAJ equivalent	D3A	2.35	0.7	11.0	Available (Current rating: 5A max.)		
	D3B	4.0	1.7	11.0			
	D3C	4.75	1.7	11.0			

YS6V-E SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Min.Din 3Pin with Lock (male)	Type No.	Pin Assignment		Quick Adapter Accessory
		PIN No.	Output	
   KYCON KPPX-3P equivalent	M6B	1	+Vo	Available (Current rating: 7.5A max.)
		2	-Vo	
		3	+Vo	
Min.Din 4Pin with Lock (male)	Type No.	Pin Assignment		
		PIN No.	Output	
   KYCON KPPX-4P equivalent	M7B	PIN No.	Output	Available (Current rating: 7.5A max.)
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
Min.Din 4Pin with Lock (female)	Type No.	Pin Assignment		
		PIN No.	Output	
   KYCON KPJX-CM-4S equivalent	M7BF	PIN No.	Output	None
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
DIN 5Pin (male)	Type No.	Pin Assignment		
		PIN No.	Output	
  	M1B	PIN No.	Output	Available (Current rating: 7.5A max.)
		1	-Vo	
		2	-Vo	
		3	+Vo	
		4	-Vo	
		5	+Vo	
Stripped and tinned leads	Type No.	Pin Assignment		
		PIN No.	Output	
	by customer	1	+Vo	None
		2	-Vo	