

1
RoHS Compliant

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

MATERAL

Insulator: ABS,Black,UL 94HB

Contact: 304 Stainless Steel Spring
Temper,Nickel plated

ORDER INFORMATION:




L- KLS5 - 18650-006- B LXXX

RoHS

1Li-ion 18650 Battery Holder





B: with WIRE(22AWG)

XXX: Cable Long

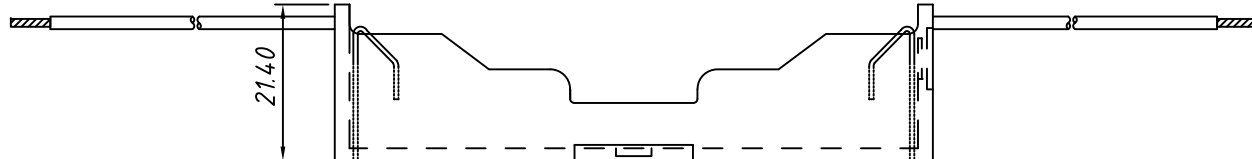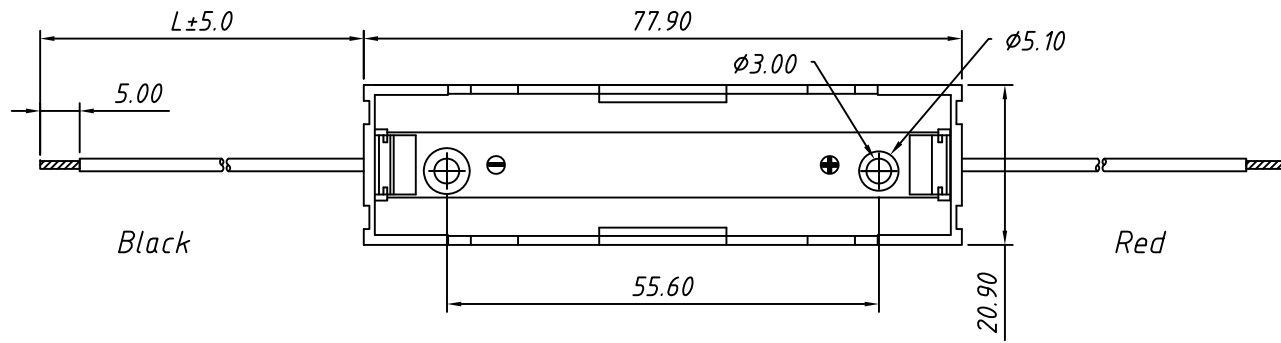

GENERAL TOLERANCE	±0.50	PROJECTION		Description:	1 Li-ion 18650 Battery Holder,with Wire
		UNITS	mm		
Angle TOLERANCE	±3°	SHEET SIZE	A4	L-KLS5-18650-006-BLXXX	
		KLS P/N:			
Draw:	Daniel		NingBo KLS ELECTRONIC CO.,L TD.		
Check:	Daniel				
Data:	2019-03-08				

1
RoHS Compliant

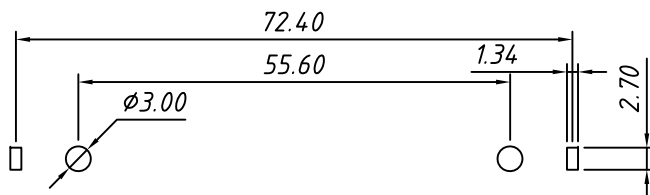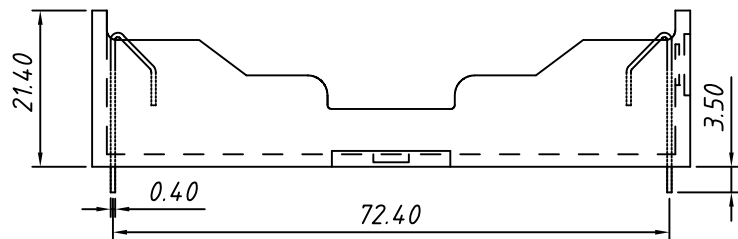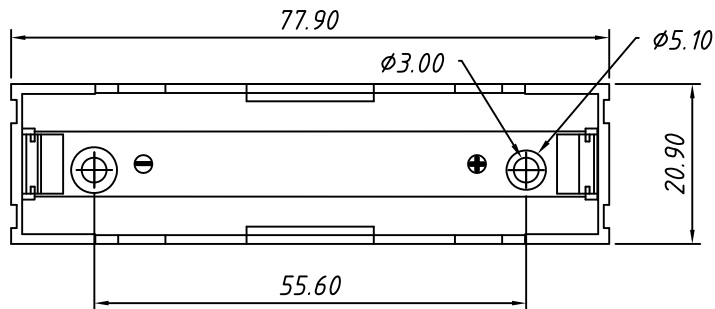

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

MATERIAL

Insulator: ABS, Black, UL 94HB

Contact: 304 Stainless Steel Spring
Temper, Nickel plated

ORDER INFORMATION:

L - KLS5 - 18650 - 006 - D

RoHS

1 Li-ion 18650 Battery Holder

D: with PC Pin

GENERAL TOLERANCE	±0.50	PROJECTION		Description:	1 Li-ion 18650 Battery Holder, with PC Pin
		UNITS	mm		
Angle TOLERANCE	±3°	SHEET SIZE	A4		
		KLS P/N:		L-KLS5-18650-006-D	
Draw:	Daniel		NingBo KLS ELECTRONIC CO.,L TD.		
Check:	Daniel				
Date:	2019-03-08				