

未注公差/General tolerances(mm)






0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

A


B

C


D

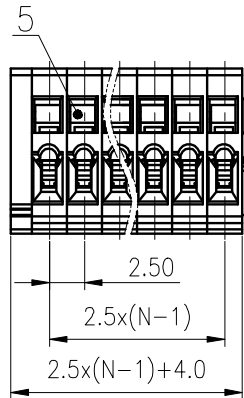

5	Spring	Stainless Steel	
4	Clamp	Copper alloy	Sn plated
3	Housing2	PA66	UL94V-0
2	Housing1	PA66	UL94V-0
1	Cover	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		150/4	150/4
IEC 标准/IEC Standard:			D
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电压/Rated Voltage(V)/Current(A)		130/6	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)			0.2~0.5/28~20
间距/Pitch(mm)/线数范围/Poles			2.50/N=02~24P
剥线长度/Stripping length(mm)			6~7
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes
标准颜色编号/Standard color number:			PANTONE 428C
PANTONE / RAL			



*03P



*02P

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET	1/1
-----	-----	-------------	------	------	----------	------------------------	------------	-------	-----

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: 8EDGK-2.5-XXP-11-01A(H)	
APPD:		DRAWING NO.: 8EDGK-2.5-C01	
CHKD:		REV	
DRFT: WangY1 2020.06.16		TO	
SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 2:1
		SHEET	1/1