


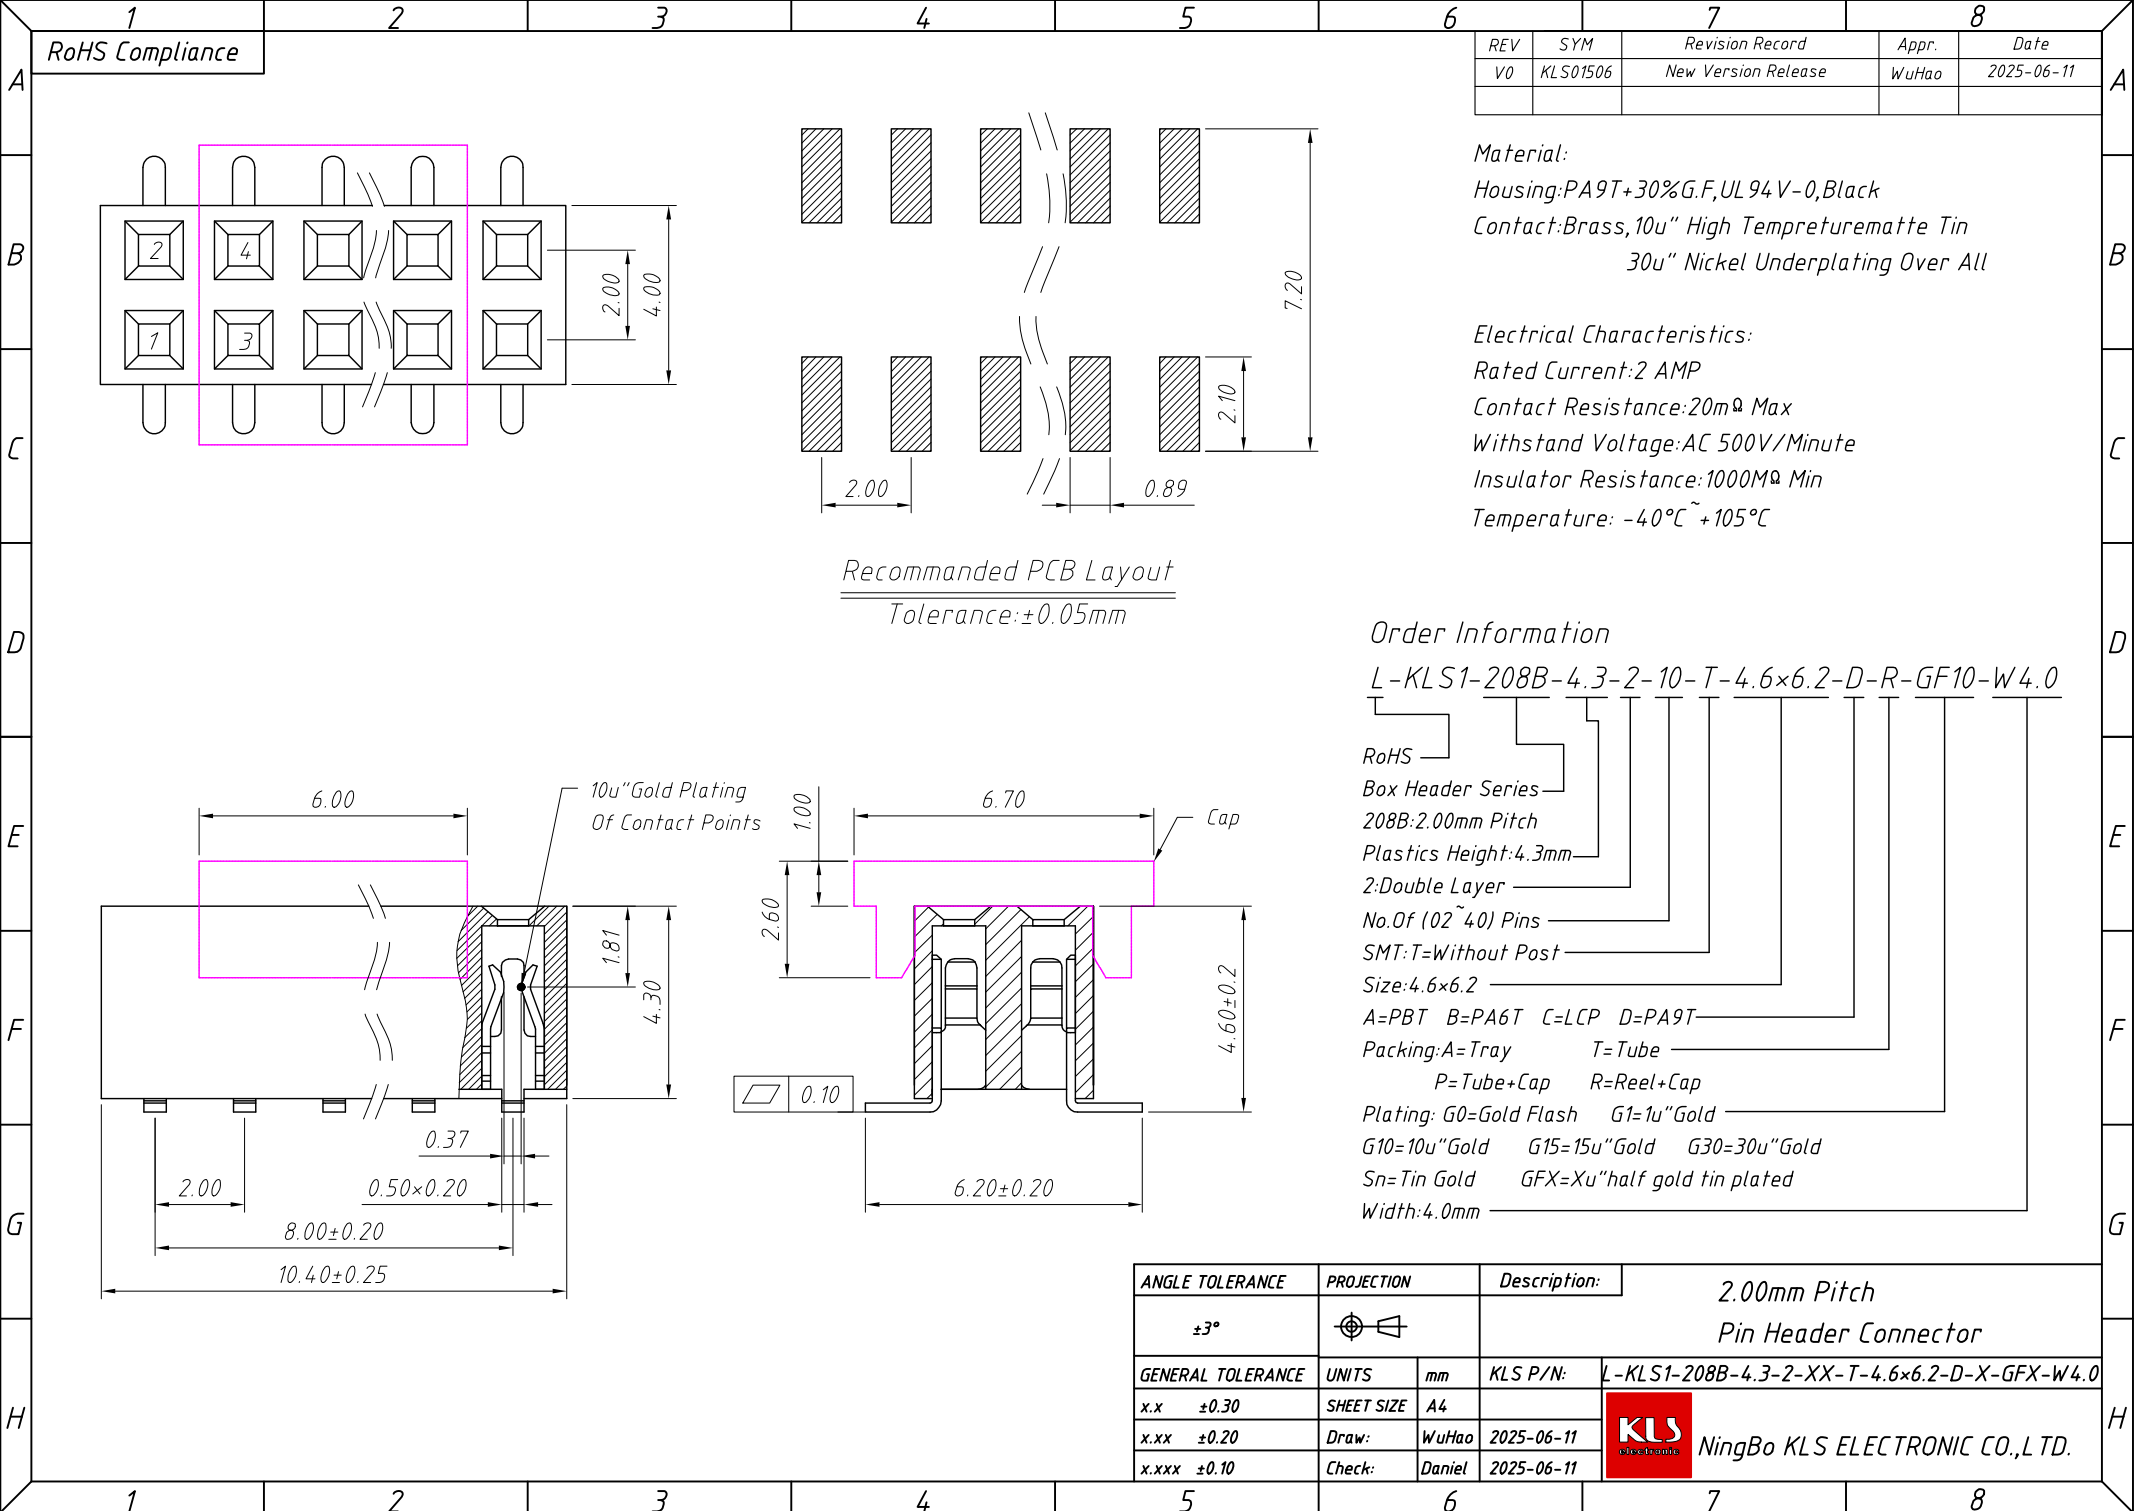

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01506	New Version Release	WuHao	2025-06-11


Material:
Housing:PA9T+30%G.F,UL 94V-0,Black
Contact:Brass,10u" High Tempreaturematte Tin
30u" Nickel Underplating Over All

Electrical Characteristics:
Rated Current:2 AMP
Contact Resistance:20mΩ Max
Withstand Voltage:AC 500V/Minute
Insulator Resistance:1000MΩ Min
Temperature: -40℃~+105℃

Recommanded PCB Layout
Tolerance:±0.05mm

Order Information

L-KLS1-208B-4.3-2-10-T-4.6x6.2-D-R-GF10-W4.0

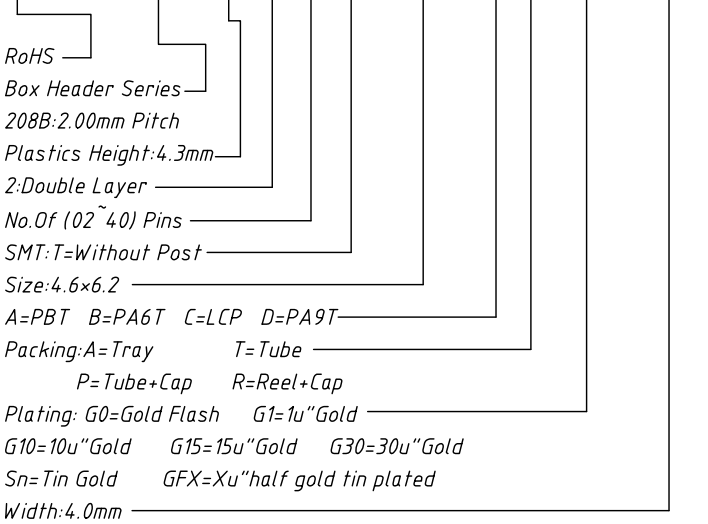

ANGLE TOLERANCE	PROJECTION	Description:	2.00mm Pitch
±3°			Pin Header Connector
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-208B-4.3-2-XX-T-4.6x6.2-D-X-GfX-W4.0
x.xx ±0.20	Draw:	WuHao	2025-06-11
x.xxx ±0.10	Check:	Daniel	2025-06-11



NingBo KLS ELECTRONIC CO.,LTD.