



5968003801

FAIR-RITE PRODUCTS

Buy Now



Looking for a discount?

[Check out our current promotions!](#)

Give us a call

1-855-837-4225

International: 1-415-281-3866

Email Us

Sales and New Orders: sales@verical.com

Order Support: support@verical.com

Suppliers: [Visit our seller page](#)

Company Address

Arrow Electronics, Inc
9201 East Dry Creek Road
Centennial, CO 80112

Toroids (5968003801)



Part Number: 5968003801

68 TOROID

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- 9th digit 1 = Parylene Coating, 2 = Thermo- Set Plastic Coating

A ring configuration provides the ultimate utilization of the intrinsic ferrite material properties. Toroidal cores are used in a wide variety of applications such as power input filters, ground- fault interrupters, common- mode filters and in pulse and broadband transformers.

All toroidal cores are supplied burnished to break sharp edges.

Coating Options:

- Toroids with an outside diameter of 9.5 mm (0.375") or smaller can be supplied Parylene C coated. The Parylene coating will increase the "A" and "C" dimensions and decrease the "B" dimension a maximum of 0.038 mm (0.0015"). The ninth digit of a Parylene coated toroid part number is a "1". See reference tables for the material characteristics of Parylene C. Parylene C coating is RoHS compliant.
- Toroids with an outside diameter of 9.5 mm (0.375") or larger can be supplied with a uniform coating of thermo- set plastic coating. This coating will increase the "A" and "C" dimensions and decrease the "B" dimension a maximum of 0.5 mm (0.020"). The 9th digit of the thermo- set plastic coated toroid part number is a "2". Thermo- set plastic coating is RoHS compliant.
- Thermo- set plastic coated parts can withstand a minimum breakdown voltage of 1000 Vrms, uniformly applied across the "C" dimension of the toroid.

For any toroidal core requirement not listed in the catalog, please contact our customer service department for availability and pricing.

[Catalog Drawing](#)
[3D Model](#)

The C dimension may be modified to suit specific applications.

Weight: 106 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	61	±1.30	2.402	—
B	35.55	±0.85	1.4	—
C	12.7	±0.50	0.5	—

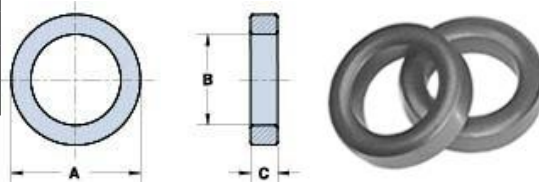



Chart Legend

$\Sigma l / A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross- Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor 

Electrical Properties	
A_L (nH)	16 Min
A_e (cm ²)	1.58
$\Sigma l / A$ (cm ⁻¹)	9.2
l_e (cm)	14.5
V_e (cm ³)	22.8

Toroids are tested for A_L values at 10 kHz.

Fair- Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com