

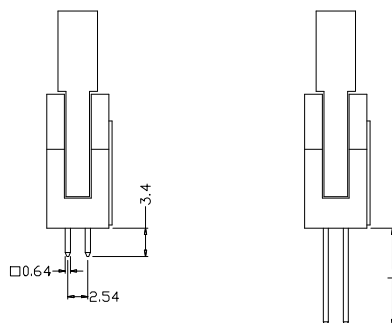
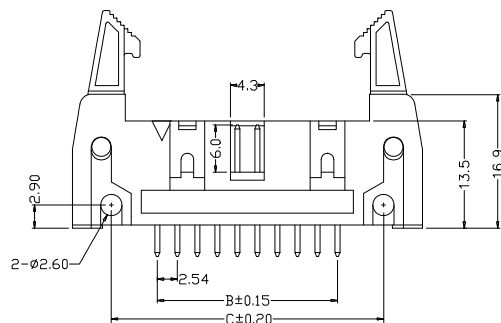


FILE:




Straight Type

Long Dip

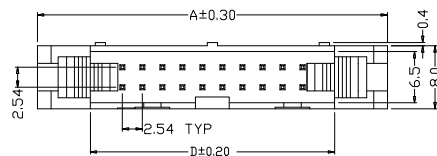

P. C. B Layout

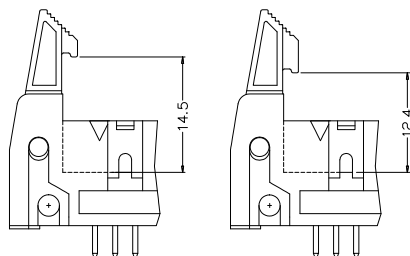

Long Lever

Short Lever

Dimension				
position	A	B	C	D
06	26.52	5.08	16.76	13.22
08	29.06	7.62	19.30	15.76
10	31.60	10.16	21.84	18.30
14	36.68	15.24	26.92	23.38
16	39.22	17.78	29.46	25.92
20	44.30	22.86	34.54	31.00
26	51.92	30.48	42.16	38.62
30	57.00	35.56	47.24	43.70
34	62.08	40.64	52.32	48.78
40	69.70	48.26	59.94	56.40
50	82.40	60.96	72.64	69.10
60	95.10	73.66	85.34	81.80
64	100.18	78.74	90.42	86.88

Electrical Characteristics:

Current Rating: 1AMP

Insulator Resistance: 5000M Ω min. at DC 500V

Contact Resistance: 20m Ω max. at DC 100mA

Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Brass

Plating: Gold plated: 2u". over 50u" nickel

Features:

- * Fully shrouded provides ultimate reliability.
- * Black or gray insulator available.
- * Choices of Eject lever.

Standard model: long lever, 3.4mm pin length

A	Total Pitch Tolerances in mm									Nominal dimension range in mm										$\perp$		$\equiv$		$-$		$//$	
	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150			
	+0.18	+0.20	+0.25	+0.3	+0.35	+0.44	+0.60	+0.70	+0.85	+0.20	+0.25	+0.30	+0.35	+0.44	+0.55	+0.70	+0.80	+0.90	0.2	0.3	0.3	0.2	0.3	0.5			
	(TENTH) EL																										

ITEM	NAME OF PART		NO. OF PART		Q"TY		MATERIAL			NOTE	
DWG.		DATE			SIZE	A4	UNITS	mm		SHEET/OF	1 / 1
CHK.		DATE			SCALE						
APP.		DATE									
					NAME	SCM-XX					
					DWGNO.						

