
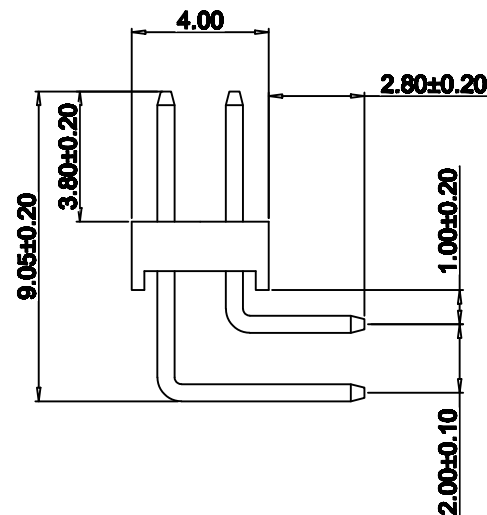


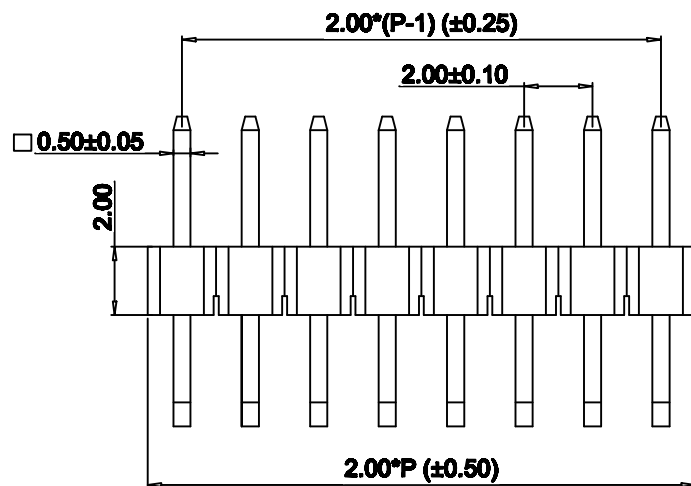

Notes:

1.Electrical Characteristics:

- 1.1 Contact Resistance: 20m Ω Max.
- 1.2 Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- 1.3 Insulation Resistance: 1000M Ω Min.
- 1.4 Current Rating:1.5A.
- 1.5 Temperature: -40°C~+105°C.

2.Materials:

- 2.1 Contact Material: Copper Alloy.
- 2.2 Contact Plating: Tin Over Nickel.
- 2.3 Insulator Materials: PBT,Black,UL94-V0.

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	$-$	$//$
	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10 to all	over 0 to 100	over 100 to 150	over 150
	± 0.18	0.20	± 0.25	± 0.3	± 0.35	0.44	± 0.60	± 0.70	0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3
6						5						4											

ITEM	NAME OF PART		NO. OF PART		Q"TY		MATERIAL		NOTE	
DWG.		DATE			SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE			SCALE	5:1				
APP.		DATE								
					NAME	PLD2-XXR				
					DWGNO.					