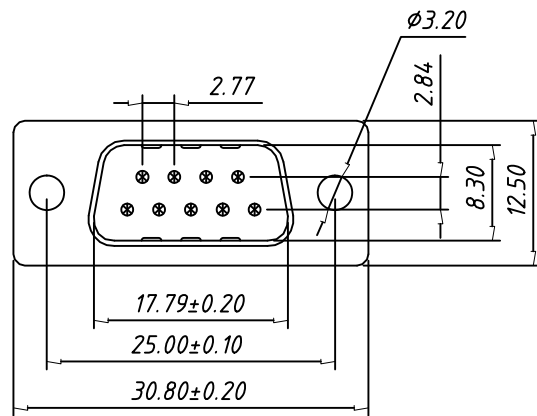


Material:

Housing: PBT+30% Glass filled, UL 94V-0

Contacts: Brass,

Gold Plating on Contact Area,

Tin on Solder Tail.

Shell: Steel,

Front Shell Nickel Plating,

Back Shell Tin Plating

Electrical Characteristics:

Current Rating: 5 AMP

Insulator Resistance: 1000M Ω Min. at DC 500V

Withstanding Voltage: 500V AC (rms) for 1 minute

Contact Resistance: 20m Ω Max. Initial

Operating Temperature: -55°C ~ +105°C

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$	$\equiv$	$-$	$//$							
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over				
	0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	10		0	100	150					
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to					
	30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10			100	150	150					
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5					
	TENTH PLACE																												

ITEM	NAME OF PART		NO. OF PART		Q'TY		MATERIAL			NOTE	
DWG.		DATE			SIZE	A4	UNITS	mm		SHEET/OF	1 / 1
CHK.		DATE			SCALE						
APP.		DATE									
					NAME	DB-9M					
					DWGNO.						