

Material:

Housing: PBT+30% Glass filled,UL 94V-0

Contacts: Brass ,Gold Plating.

Shell: Steel, Nickel Plating

Electrical Characteristics:





Current Rating: 5 AMP

Insulator Resistance: 1000M Ω Min. at DC 500V

Withstanding Voltage: 500V AC (rms) for 1 minute

Contact Resistance: 20m Ω Max. Initial

Operating Temperature: -55°C ~ +105°C

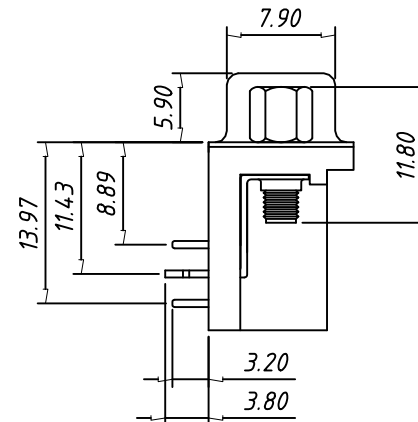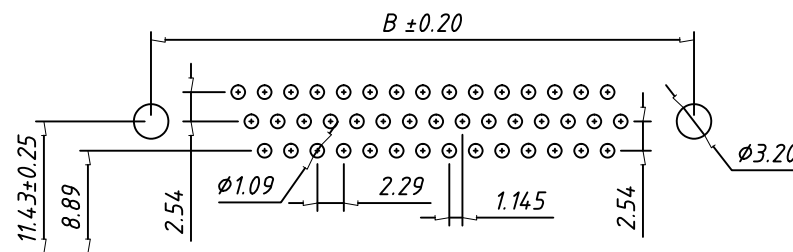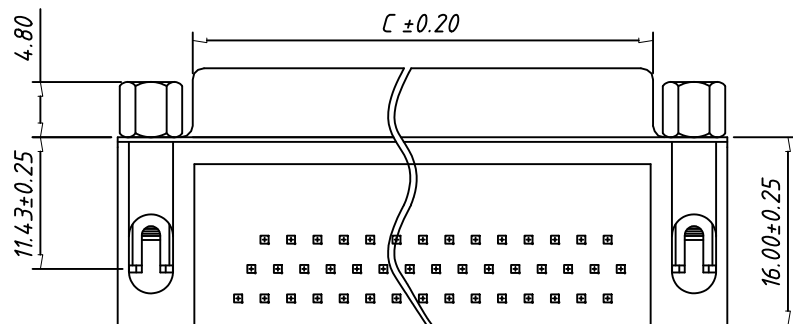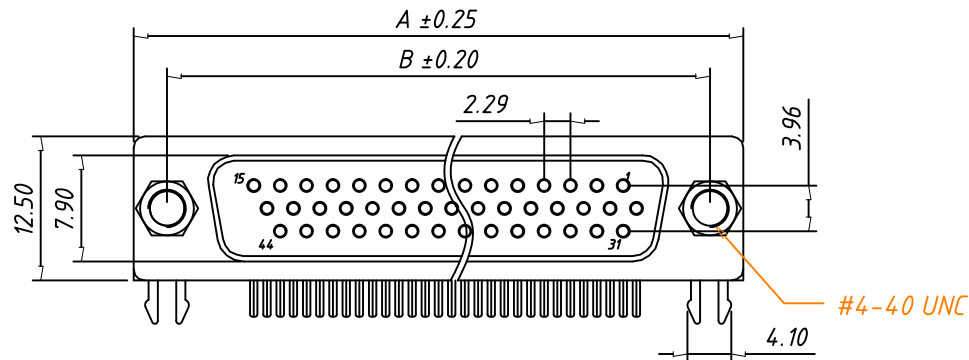

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05mm

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$		$-$		$//$	
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
	0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	320	0	10		0	100	150	150
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
	30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10			all	100	150	150	
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5	
	(GENERAL FIELD)																									

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL			NOTE	
DWG.		DATE		SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE					
APP.		DATE							
				NAME	DHR-XXF				
				DWGNO.					

