

NOTES:

Contact resistance: $\leq 20\text{m}\Omega$

Insulation resistance: $\geq 1000\text{M}\Omega$

Rated current: 5A

Temperature range: $-55^{\circ}\text{C} \sim +120^{\circ}\text{C}$


Contact material: Brass

Contact plated: Ni plated $\geq 30\mu$, Tin plated $\geq 80\mu$,
Gold plated $\geq 1\mu$.

Insulator material: PBT

Withstand voltage: 1000VAC.

There should be no breakdown and flashover phenomena on the product after one minute.

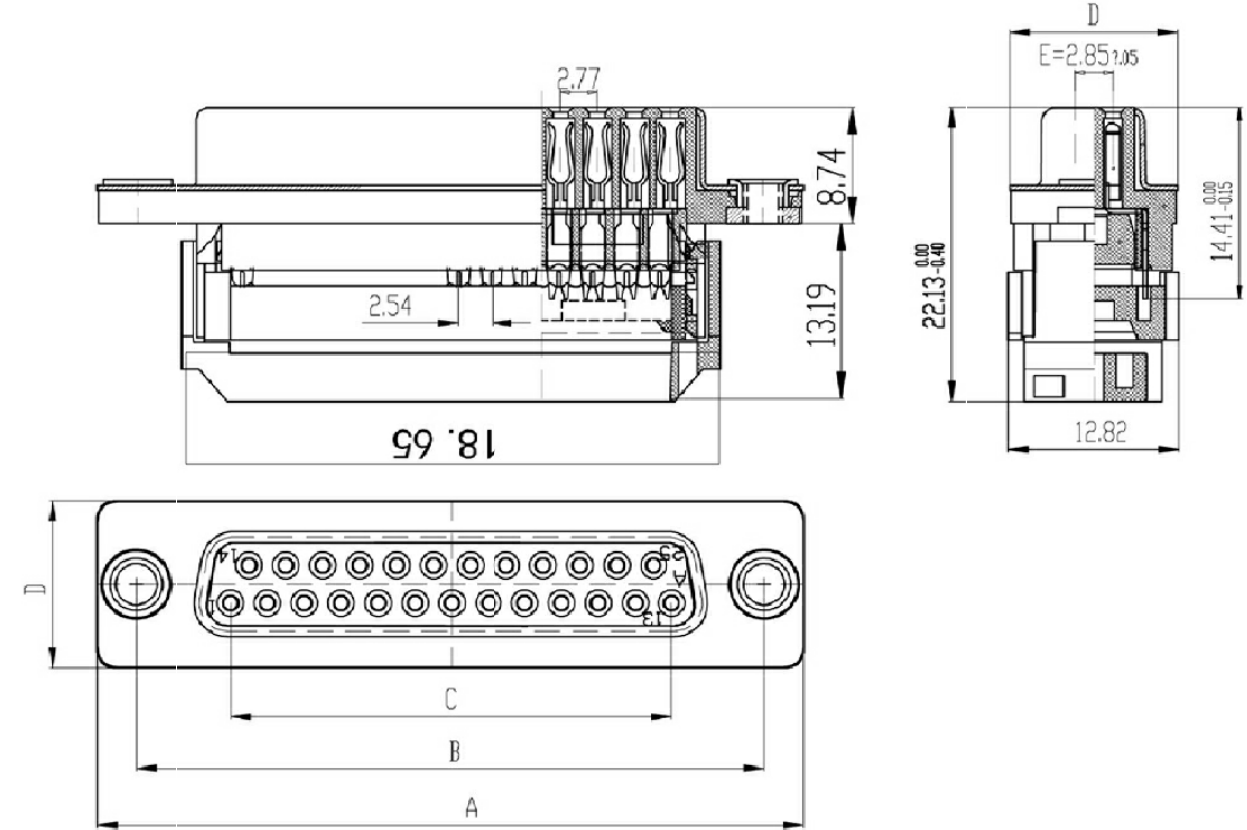

规格	A		B		C		D	E
9	31.00 ^{+0.10} _{-0.10}	25.00 ^{+0.05} _{-0.05}	11.08 ^{0.00} _{-0.10}	12.50 ^{+0.10} _{-0.10}	2.85 ^{+0.05} _{-0.05}			
15	39.3 ^{+0.10} _{-0.10}	33.25 ^{+0.05} _{-0.05}	19.39 ^{0.00} _{-0.10}					
25	53.10 ^{+0.10} _{-0.10}	47.06 ^{+0.05} _{-0.05}	33.24 ^{+0.10} _{-0.10}					
37	69.5 ^{+0.10} _{-0.10}	63.5 ^{+0.05} _{-0.05}	49.86 ^{+0.10} _{-0.10}					

A	Total Pitch Tolerances in mm								Nominal dimension range in mm								$\perp$		$\equiv$	$-$	$//$			
	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 350 to 500	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10 to 100	over 100 to 150	over 150 to 500		
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5
	6								5								4							

ITEM		NAME OF PART		NO. OF PART		Q"TY	MATERIAL			NOTE	
DWG.	SK	DATE				SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE				SCALE					
APP.		DATE				NAME	DI-XXF				
					DWGNO.						

