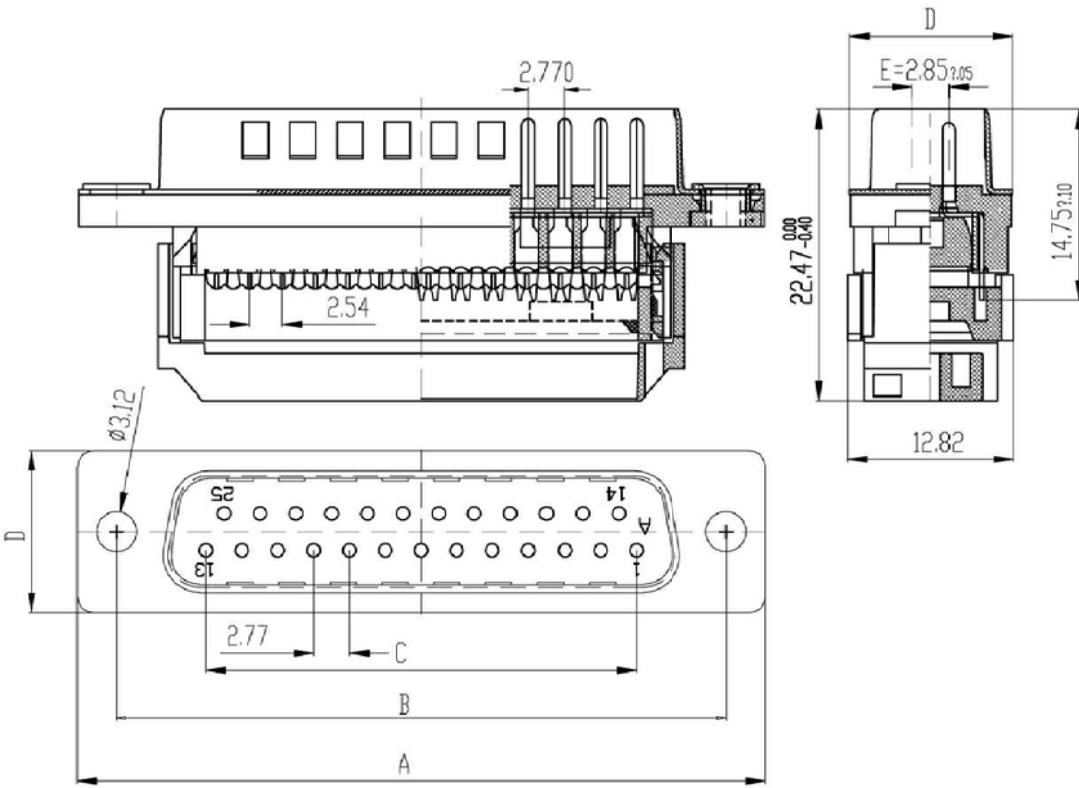


6		5		4		3		2		1																																																																																																														
FILE:				REV				CONTENT				CHK		DATE																																																																																																										
NOTES:																																																																																																																								
Contact resistance:≤20MΩ																																																																																																																								
Insulation resistance:≥1000MΩ																																																																																																																								
Rated currency:5A																																																																																																																								
Temperature range: -55° C~+120° C																																																																																																																								
Contact material:Brass																																																																																																																								
Contact plated:Ni plated≥30 μ ,Tin plated≥80 μ ,																																																																																																																								
Gold plated≥1 μ .																																																																																																																								
Insulator material:PBT																																																																																																																								
Withstand voltage:1000VAC.																																																																																																																								
There should be no breakdown and flashover phenomena on the product after one minute.																																																																																																																								
																																																																																																																								
<table><tr><td>规格</td><td colspan="2">A</td><td colspan="2">B</td><td colspan="2">C</td><td colspan="2">D</td><td colspan="2">E</td></tr><tr><td>9</td><td colspan="2">31.00^{+0.10}_{-0.10}</td><td colspan="2">25.00^{+0.05}_{-0.05}</td><td colspan="2">11.08^{0.00}_{-0.10}</td><td colspan="2" rowspan="4">12.50^{+0.10}_{-0.10}</td><td colspan="2" rowspan="4">2.85^{+0.05}_{-0.05}</td></tr><tr><td>15</td><td colspan="2">39.3^{+0.10}_{-0.10}</td><td colspan="2">33.25^{+0.05}_{-0.05}</td><td colspan="2">19.39^{0.00}_{-0.10}</td></tr><tr><td>25</td><td colspan="2">53.10^{+0.10}_{-0.10}</td><td colspan="2">47.06^{+0.05}_{-0.05}</td><td colspan="2">33.24^{+0.10}_{-0.10}</td></tr><tr><td>37</td><td colspan="2">69.5^{+0.10}_{-0.10}</td><td colspan="2">63.5^{+0.05}_{-0.05}</td><td colspan="2">49.86^{+0.10}_{-0.10}</td></tr></table>														规格	A		B		C		D		E		9	31.00 ^{+0.10} _{-0.10}		25.00 ^{+0.05} _{-0.05}		11.08 ^{0.00} _{-0.10}		12.50 ^{+0.10} _{-0.10}		2.85 ^{+0.05} _{-0.05}		15	39.3 ^{+0.10} _{-0.10}		33.25 ^{+0.05} _{-0.05}		19.39 ^{0.00} _{-0.10}		25	53.10 ^{+0.10} _{-0.10}		47.06 ^{+0.05} _{-0.05}		33.24 ^{+0.10} _{-0.10}		37	69.5 ^{+0.10} _{-0.10}		63.5 ^{+0.05} _{-0.05}		49.86 ^{+0.10} _{-0.10}																																																																	
规格	A		B		C		D		E																																																																																																															
9	31.00 ^{+0.10} _{-0.10}		25.00 ^{+0.05} _{-0.05}		11.08 ^{0.00} _{-0.10}		12.50 ^{+0.10} _{-0.10}		2.85 ^{+0.05} _{-0.05}																																																																																																															
15	39.3 ^{+0.10} _{-0.10}		33.25 ^{+0.05} _{-0.05}		19.39 ^{0.00} _{-0.10}																																																																																																																			
25	53.10 ^{+0.10} _{-0.10}		47.06 ^{+0.05} _{-0.05}		33.24 ^{+0.10} _{-0.10}																																																																																																																			
37	69.5 ^{+0.10} _{-0.10}		63.5 ^{+0.05} _{-0.05}		49.86 ^{+0.10} _{-0.10}																																																																																																																			
<table><tr><td colspan="10">Total Pitch Tolerances in mm</td><td colspan="10">Nominal dimension range in mm</td><td colspan="2">⊥</td><td colspan="2">≡</td><td colspan="2">—</td><td colspan="2">//</td></tr><tr><td>over 0</td><td>over 30</td><td>over 53</td><td>over 70</td><td>over 90</td><td>over 115</td><td>over 150</td><td>over 250</td><td>over 350</td><td>over 500</td><td>over 0</td><td>over 30</td><td>over 53</td><td>over 70</td><td>over 90</td><td>over 115</td><td>over 150</td><td>over 200</td><td>over 250</td><td>over 320</td><td>over 0</td><td>over 10</td><td>all</td><td>over 0</td><td>over 100</td><td>over 150</td><td>over 150</td></tr><tr><td>to 30</td><td>to 53</td><td>to 70</td><td>to 90</td><td>to 115</td><td>to 150</td><td>to 250</td><td>to 350</td><td>to 500</td><td></td><td>to 30</td><td>to 53</td><td>to 70</td><td>to 90</td><td>to 115</td><td>to 150</td><td>to 200</td><td>to 250</td><td>to 320</td><td>to 10</td><td></td><td></td><td></td><td>to 100</td><td>to 150</td><td></td></tr><tr><td>±0.18</td><td>±0.20</td><td>±0.25</td><td>±0.3</td><td>±0.35</td><td>±0.4</td><td>±0.60</td><td>±0.70</td><td>±0.75</td><td>±0.20</td><td>±0.25</td><td>±0.30</td><td>±0.35</td><td>±0.4</td><td>±0.55</td><td>±0.70</td><td>±0.80</td><td>±0.90</td><td>±0.2</td><td>0.3</td><td>0.3</td><td>0.3</td><td>0.2</td><td>0.3</td><td>0.5</td><td></td></tr></table>														Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥		≡		—		//		over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150	over 150	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500		to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10				to 100	to 150		±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	±0.2	0.3	0.3	0.3	0.2	0.3	0.5	
Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥		≡		—		//																																																																																														
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150	over 150																																																																																														
to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500		to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10				to 100	to 150																																																																																																
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	±0.2	0.3	0.3	0.3	0.2	0.3	0.5																																																																																																
ITEM NAME OF PART NO. OF PART Q"TY MATERIAL NOTE																																																																																																																								
DWG.		DATE		SIZE		A4		UNITS		mm		SHEET/OF		1 / 1																																																																																																										
CHK.		DATE		SCALE																																																																																																																				
APP.		DATE		NAME		DI-XXM																																																																																																																		
				DWGNO.																																																																																																																				
KEEN SIDE electronics																																																																																																																								