

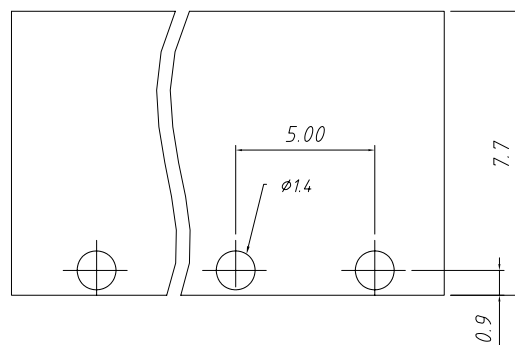
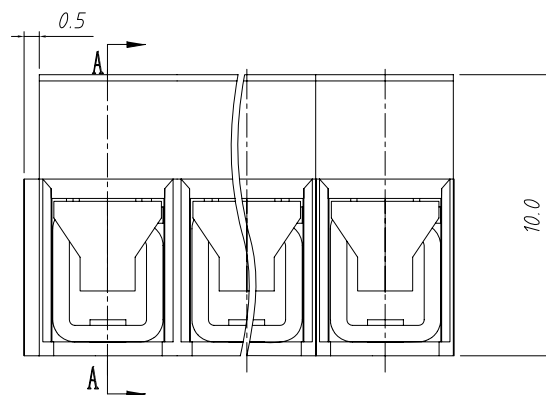


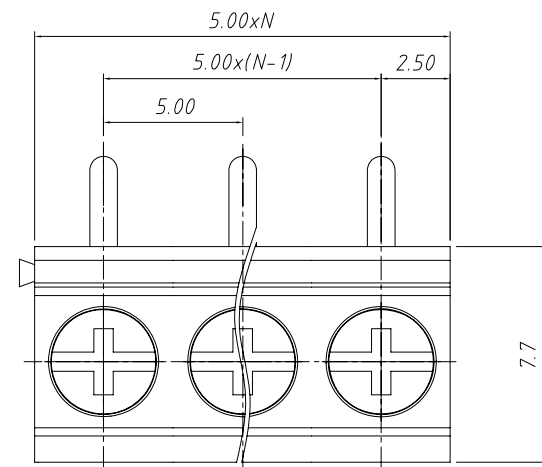

PCB LAYOUT

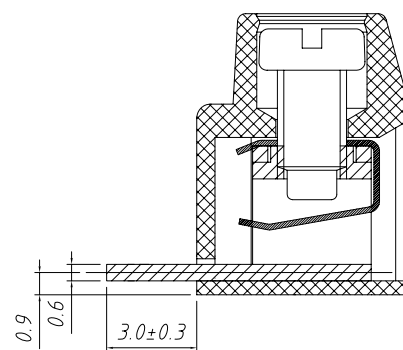

SECTION A-A

Material

Screw: M2.5, Steel, Zn plated

Shrapnel: Stainless steel, Nickel plated

Pin header: Brass or Steel, Tin plated

Housing: PA66, UL94V-0

Electrical

Rated voltage: 300V

Rated current: 8A

Wire range: 26~14AWG 2.5mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1min

Mechanical

Temp. Range: -40 °C ~ +105 °C

Soldering: 250°C±5°C for 5S

Torque: 0.4 N.m (3.54Lb. in)

Strip length: 6~7 mm

Order Information

L-KLS2-126R- 5.00-XXP-4 S XX

RoHS

Terminal Block

Pitch

No.: of Pole

Product Code:00~99

Screw: S- Slot Screw

C- Cross Screw

Color: 4-Green

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		Description:
X. ±0.60	X. ±5°	UNITS	mm	Screw CONN TERM BLOCK 5.00MM
.X ±0.38	.X ±3°	SHEET SIZE	A4	
.XX ±0.25	.XX ±2°		KLS P/N:	
				KLS2-126R-5.00-XXP-4S

KLS ELECTRONIC CO., LTD.