


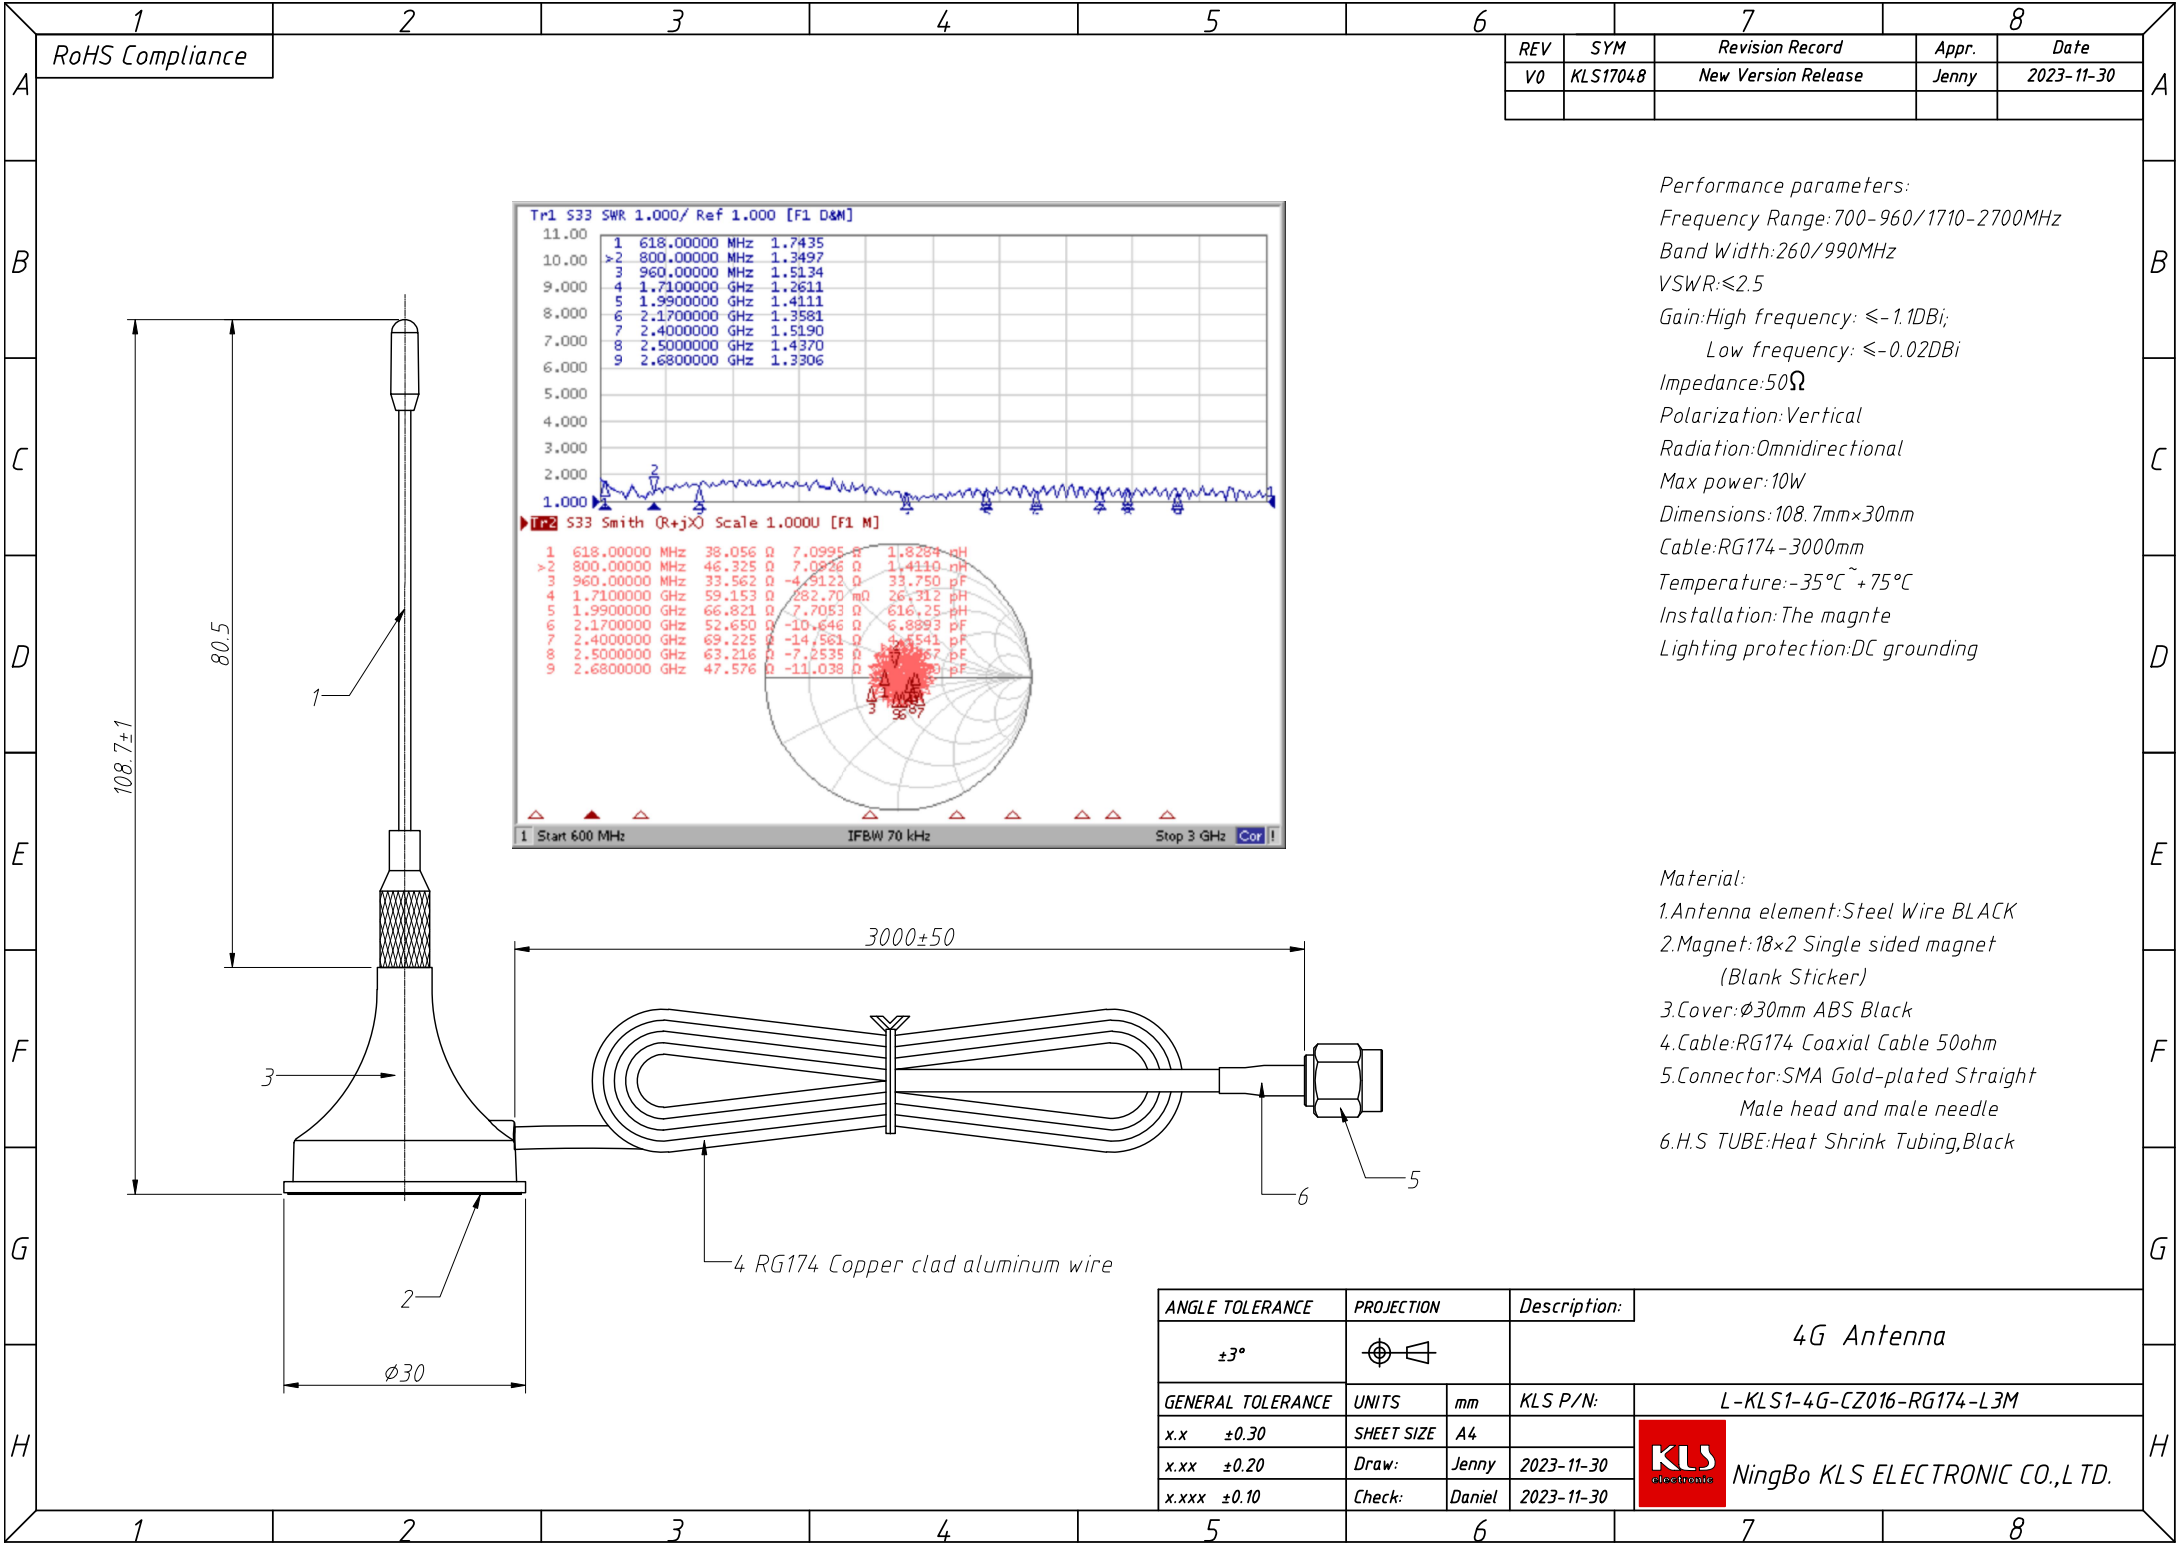

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS17048	New Version Release	Jenny	2023-11-30

Performance parameters:
Frequency Range:700-960/1710-2700MHz
Band Width:260/990MHz
VSWR:≤2.5
Gain:High frequency: ≤-1.1DBi;
Low frequency: ≤-0.02DBi
Impedance:50Ω
Polarization:Vertical
Radiation:Omnidirectional
Max power:10W
Dimensions:108.7mm×30mm
Cable:RG174-3000mm
Temperature:-35℃~+75℃
Installation:The magnte
Lighting protection:DC grounding

Material:
1.Antenna element:Steel Wire BLACK
2.Magnet:18×2 Single sided magnet
(Blank Sticker)
3.Cover:Ø30mm ABS Black
4.Cable:RG174 Coaxial Cable 50ohm
5.Connector:SMA Gold-plated Straight
Male head and male needle
6.H.S TUBE:Heat Shrink Tubing,Black

ANGLE TOLERANCE	PROJECTION	Description:	4G Antenna		
±3°					
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-4G-CZ016-RG174-L3M	
x.x ±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.	
x.xx ±0.20	Draw:	Jenny	2023-11-30		
x.xxx ±0.10	Check:	Daniel	2023-11-30		