


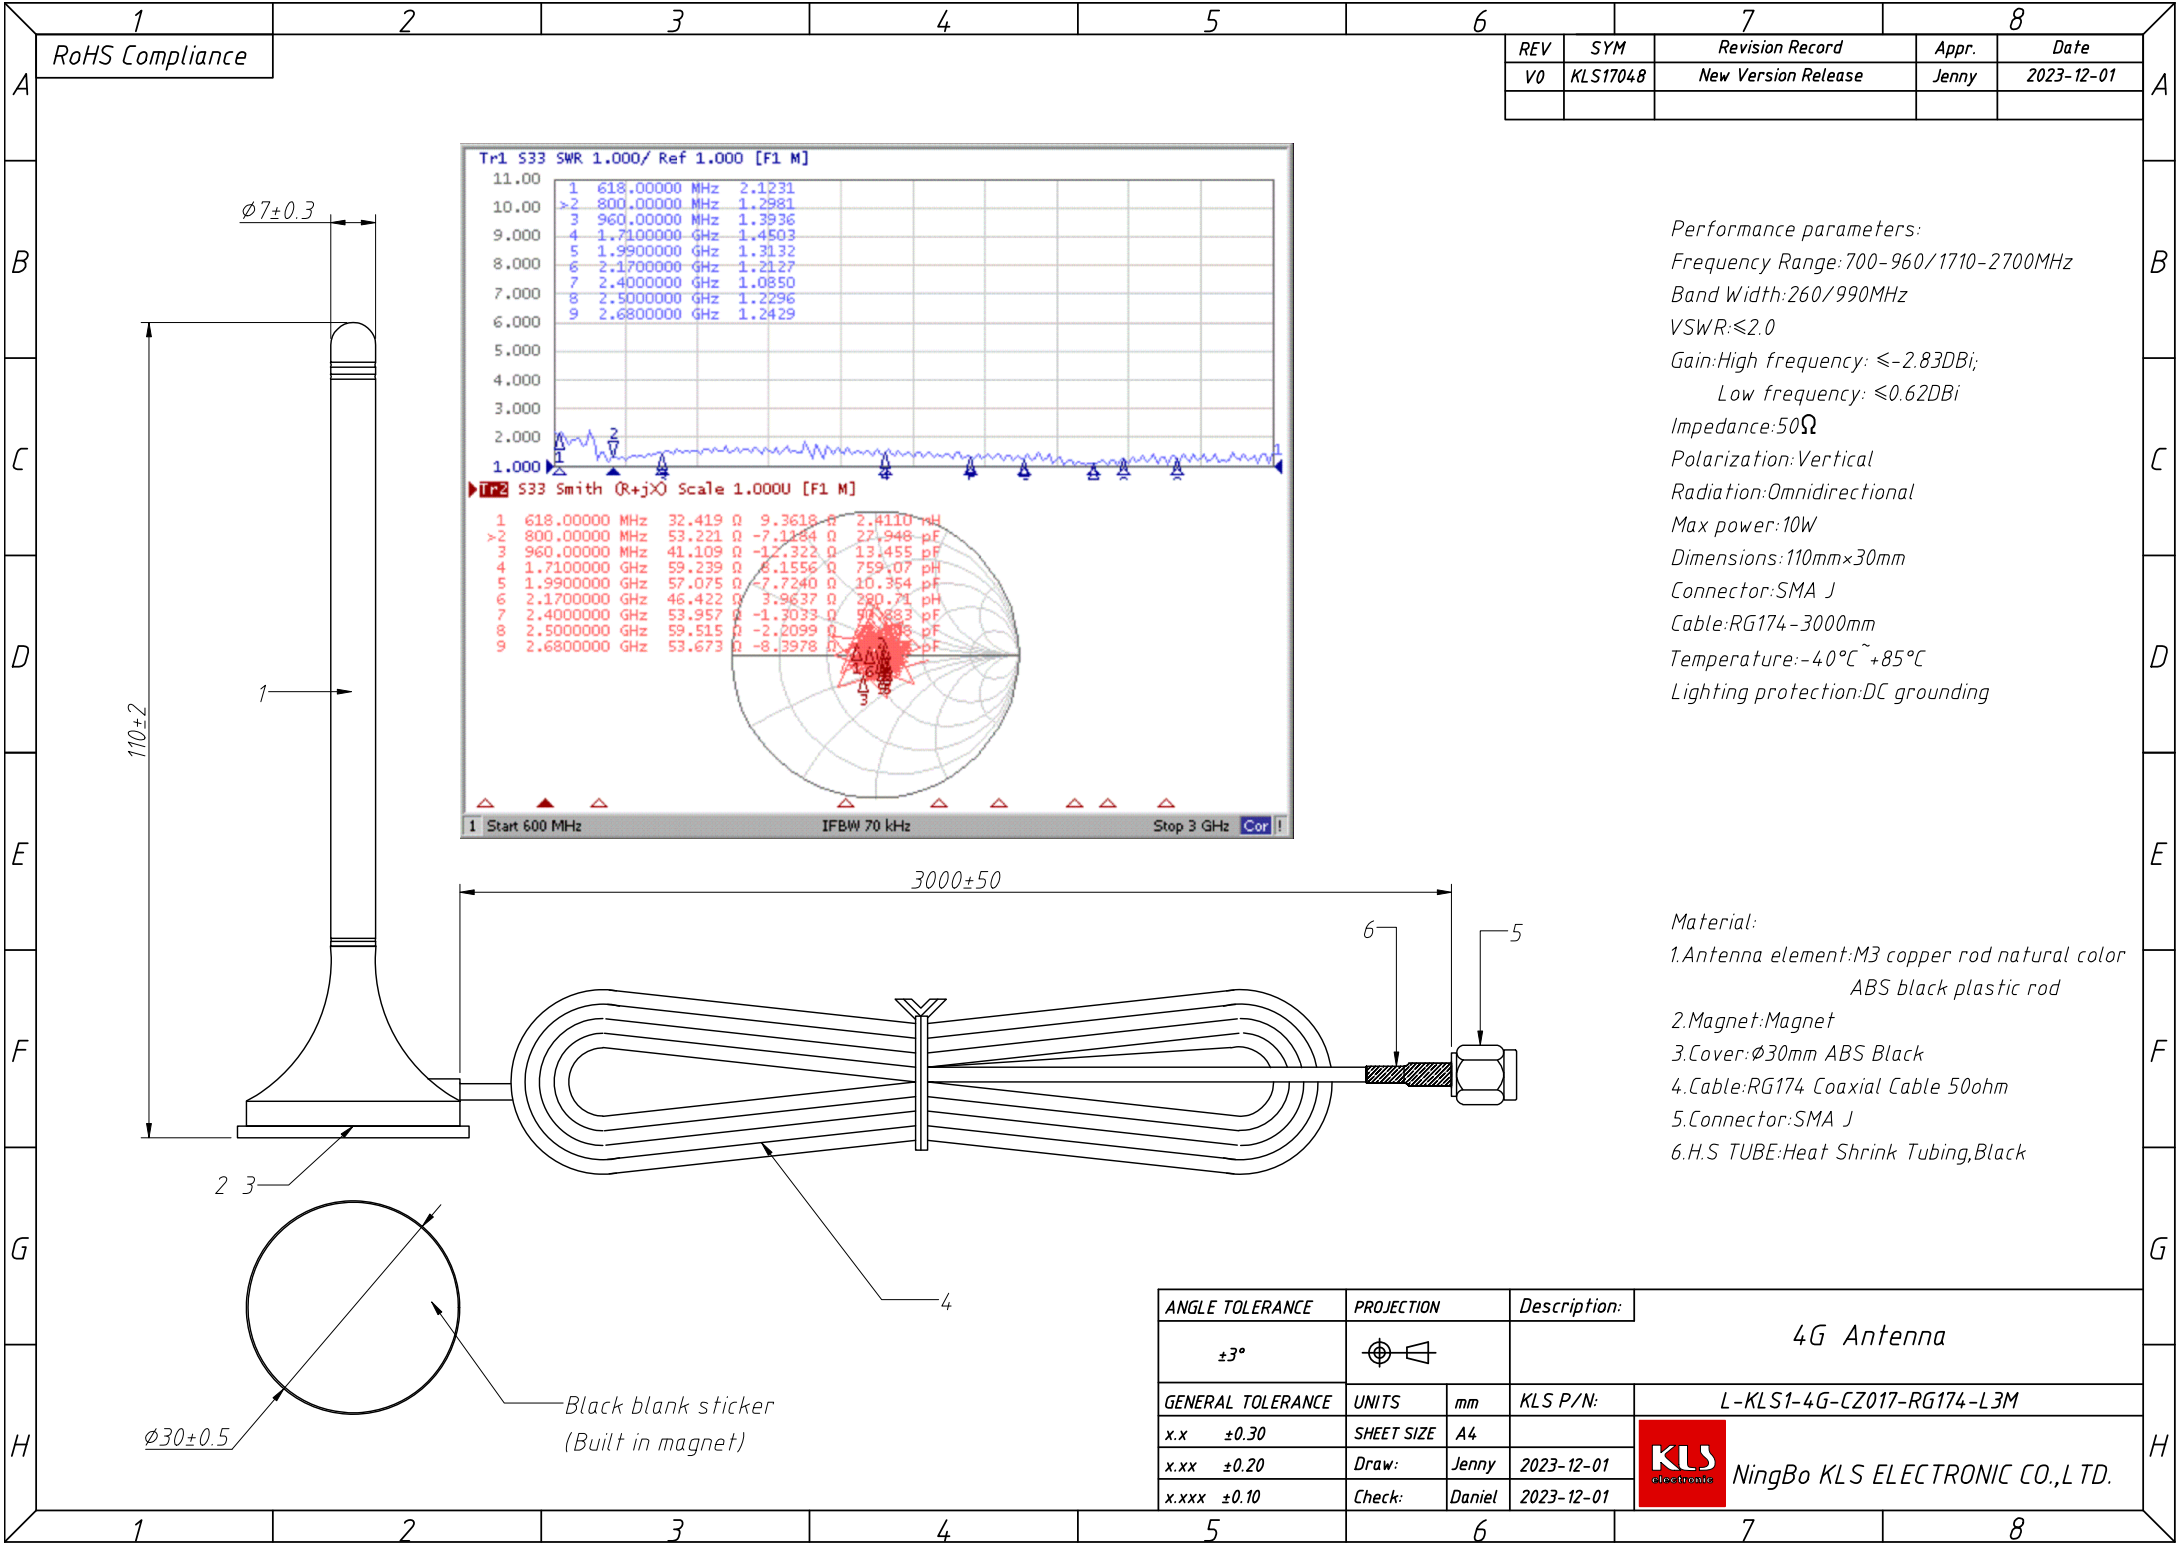

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS17048	New Version Release	Jenny	2023-12-01

Performance parameters:
Frequency Range: 700-960/1710-2700MHz
Band Width: 260/990MHz
VSWR: ≤2.0
Gain: High frequency: ≤-2.83DBi;
Low frequency: ≤0.62DBi
Impedance: 50Ω
Polarization: Vertical
Radiation: Omnidirectional
Max power: 10W
Dimensions: 110mm×30mm
Connector: SMA J
Cable: RG174-3000mm
Temperature: -40°C ~ +85°C
Lighting protection: DC grounding

Material:
1. Antenna element: M3 copper rod natural color
ABS black plastic rod
2. Magnet: Magnet
3. Cover: Ø30mm ABS Black
4. Cable: RG174 Coaxial Cable 50ohm
5. Connector: SMA J
6. H.S TUBE: Heat Shrink Tubing, Black

ANGLE TOLERANCE	PROJECTION	Description:	4G Antenna		
±3°					
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-4G-CZ017-RG174-L3M	
x.x ±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.	
x.xx ±0.20	Draw:	Jenny	2023-12-01		
x.xxx ±0.10	Check:	Daniel	2023-12-01		