

未注公差/General tolerances(mm)





0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

A

B

C

D

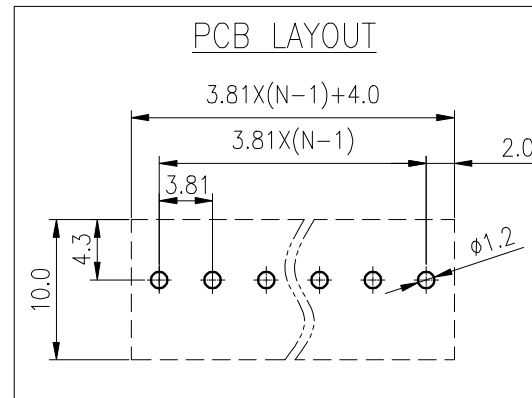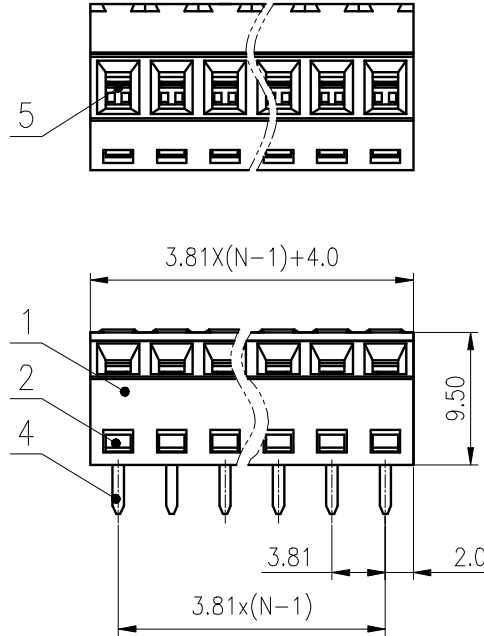

5	Cage	Copper alloy	M2/Ni Plated
4	Pin Header	Copper alloy	Sn Plated
3	Screws	Steel	M2/Zn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		300/10	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		/	III/2
额定电压/电压/Rated Voltage(V)/Current(A)		/	130/10
工频耐压/Withstanding Voltage(V/Min)		/	AC1250
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2, 0.2/1.77	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~1.5/26~16	
间距/Pitch(mm)/线数范围/Poles		3.81/N=02~18P	
剥线长度/Stripping length(mm)		5~6	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number:		/	
PANTONE / RAL			

MATERIAL:		SURFACE:	
MAT NO.:	/	 宁波高松电子有限公司 NINGBO DEGSN ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	Li GL 2020.06.22		
CHKD:	Mao J 2020.06.22		
DRFT:	Wang LX 2020.06.22	NAME: DG381S-3.81-XXP-1Y-00A(H)	
DRAWING NO.: DG381S-3.81-C01		REV	T1
TYPE: CUSTOMER DRAWING		SCALE: 2:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

SIZE: A4	mm (inch)
----------	-----------