








RoHS Compliance

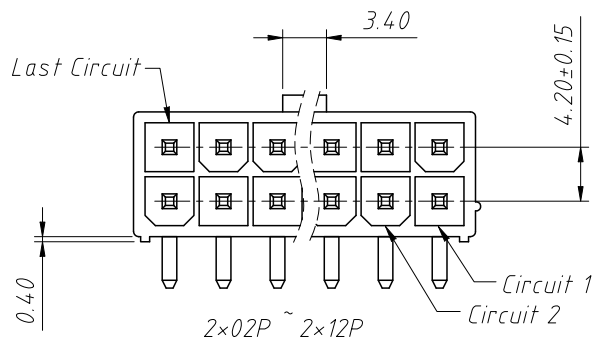

Pin	Dimensions(mm)	
	A	B
2x01	---	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

Material:
Housing:PA66,UL 94 V-0/2
Contacts:Brass
Finish:Tin-plated or Gold-flash

Electrical Characteristics:
Rated Current:7.0A AC,DC
Voltage rating:600V AC,DC
Temperature range:-25℃ ~ + 85℃
Insulator Resistance:1000MΩ Min
Withstanding Voltage:1500V AC/minute
Contact Resistance:20mΩ Max

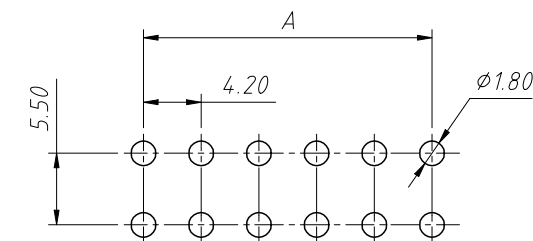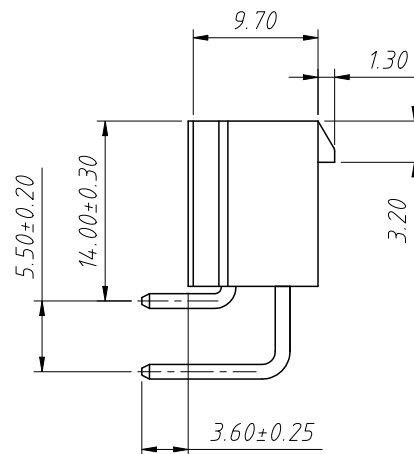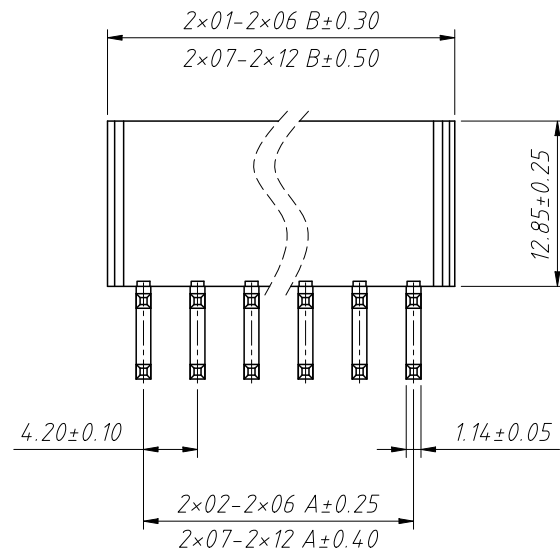

Order Information:
L-KLS1-4.20-2x02-R
L: RoHS
Pitch:4.20mm
Pins:
1-Single layer
2-Double layer
No.of 01~12 pins
Type:
S / SW / SB-Straight male pin
R / RW / RB-Right angle male pin

ANGLE TOLERANCE	PROJECTION		Description:	4.20mm Pitch Mini-Fit JR 5556 5557 5559 5566 5569 Wire To Board Connector	
±3°					
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-4.20-2×02-R	
x.x ±0.30	SHEET SIZE	A4			NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.20	Draw:	Daniel	2021-01-11		
x.xxx ±0.10	Check:	Daniel	2021-01-11		



NingBo KLS ELECTRONIC CO.,L TD.