



公差/General tolerances(mm)												0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.50
												±2'

A

B

C

D

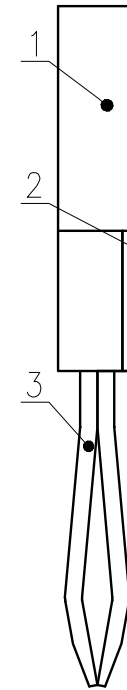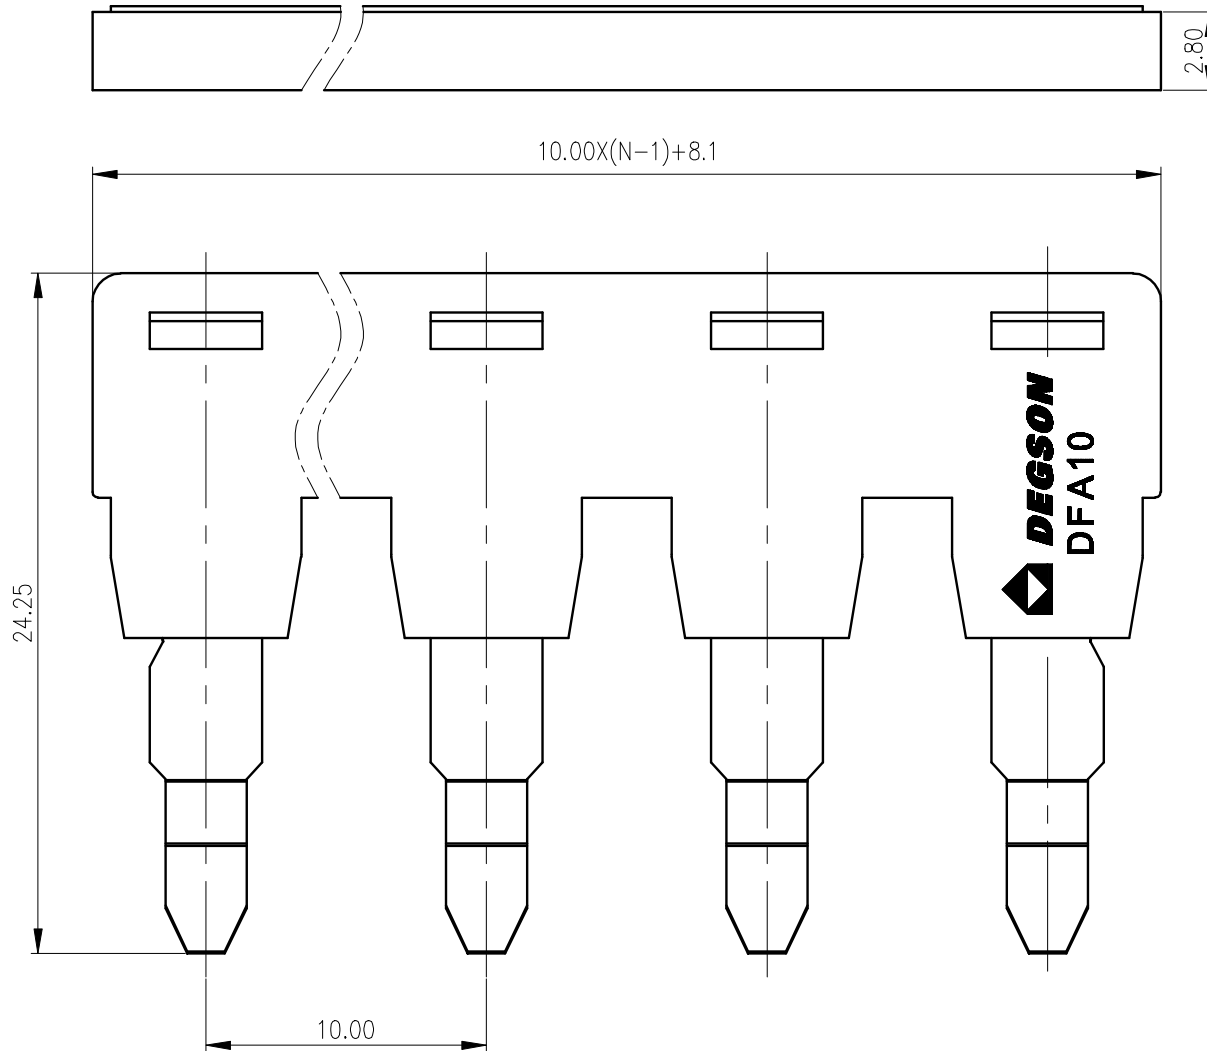

3	Bridgware	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数范围/Poles			10.00/N=02~10P
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

MATERIAL: / /		SURFACE: /	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: Li GL 2020.06.04		NAME: DFA10-XXP-1Y-00A(H)	
CHKD: Mao J 2020.06.04			
DRFT:ZhengQC 2020.06.04		DRAWING NO.: DFA10-C01	
		REV TO	
SIZE: A4		TYPE: CUSTOMER DRAWING	SCALE: 4:1
		SHEET	1/1