


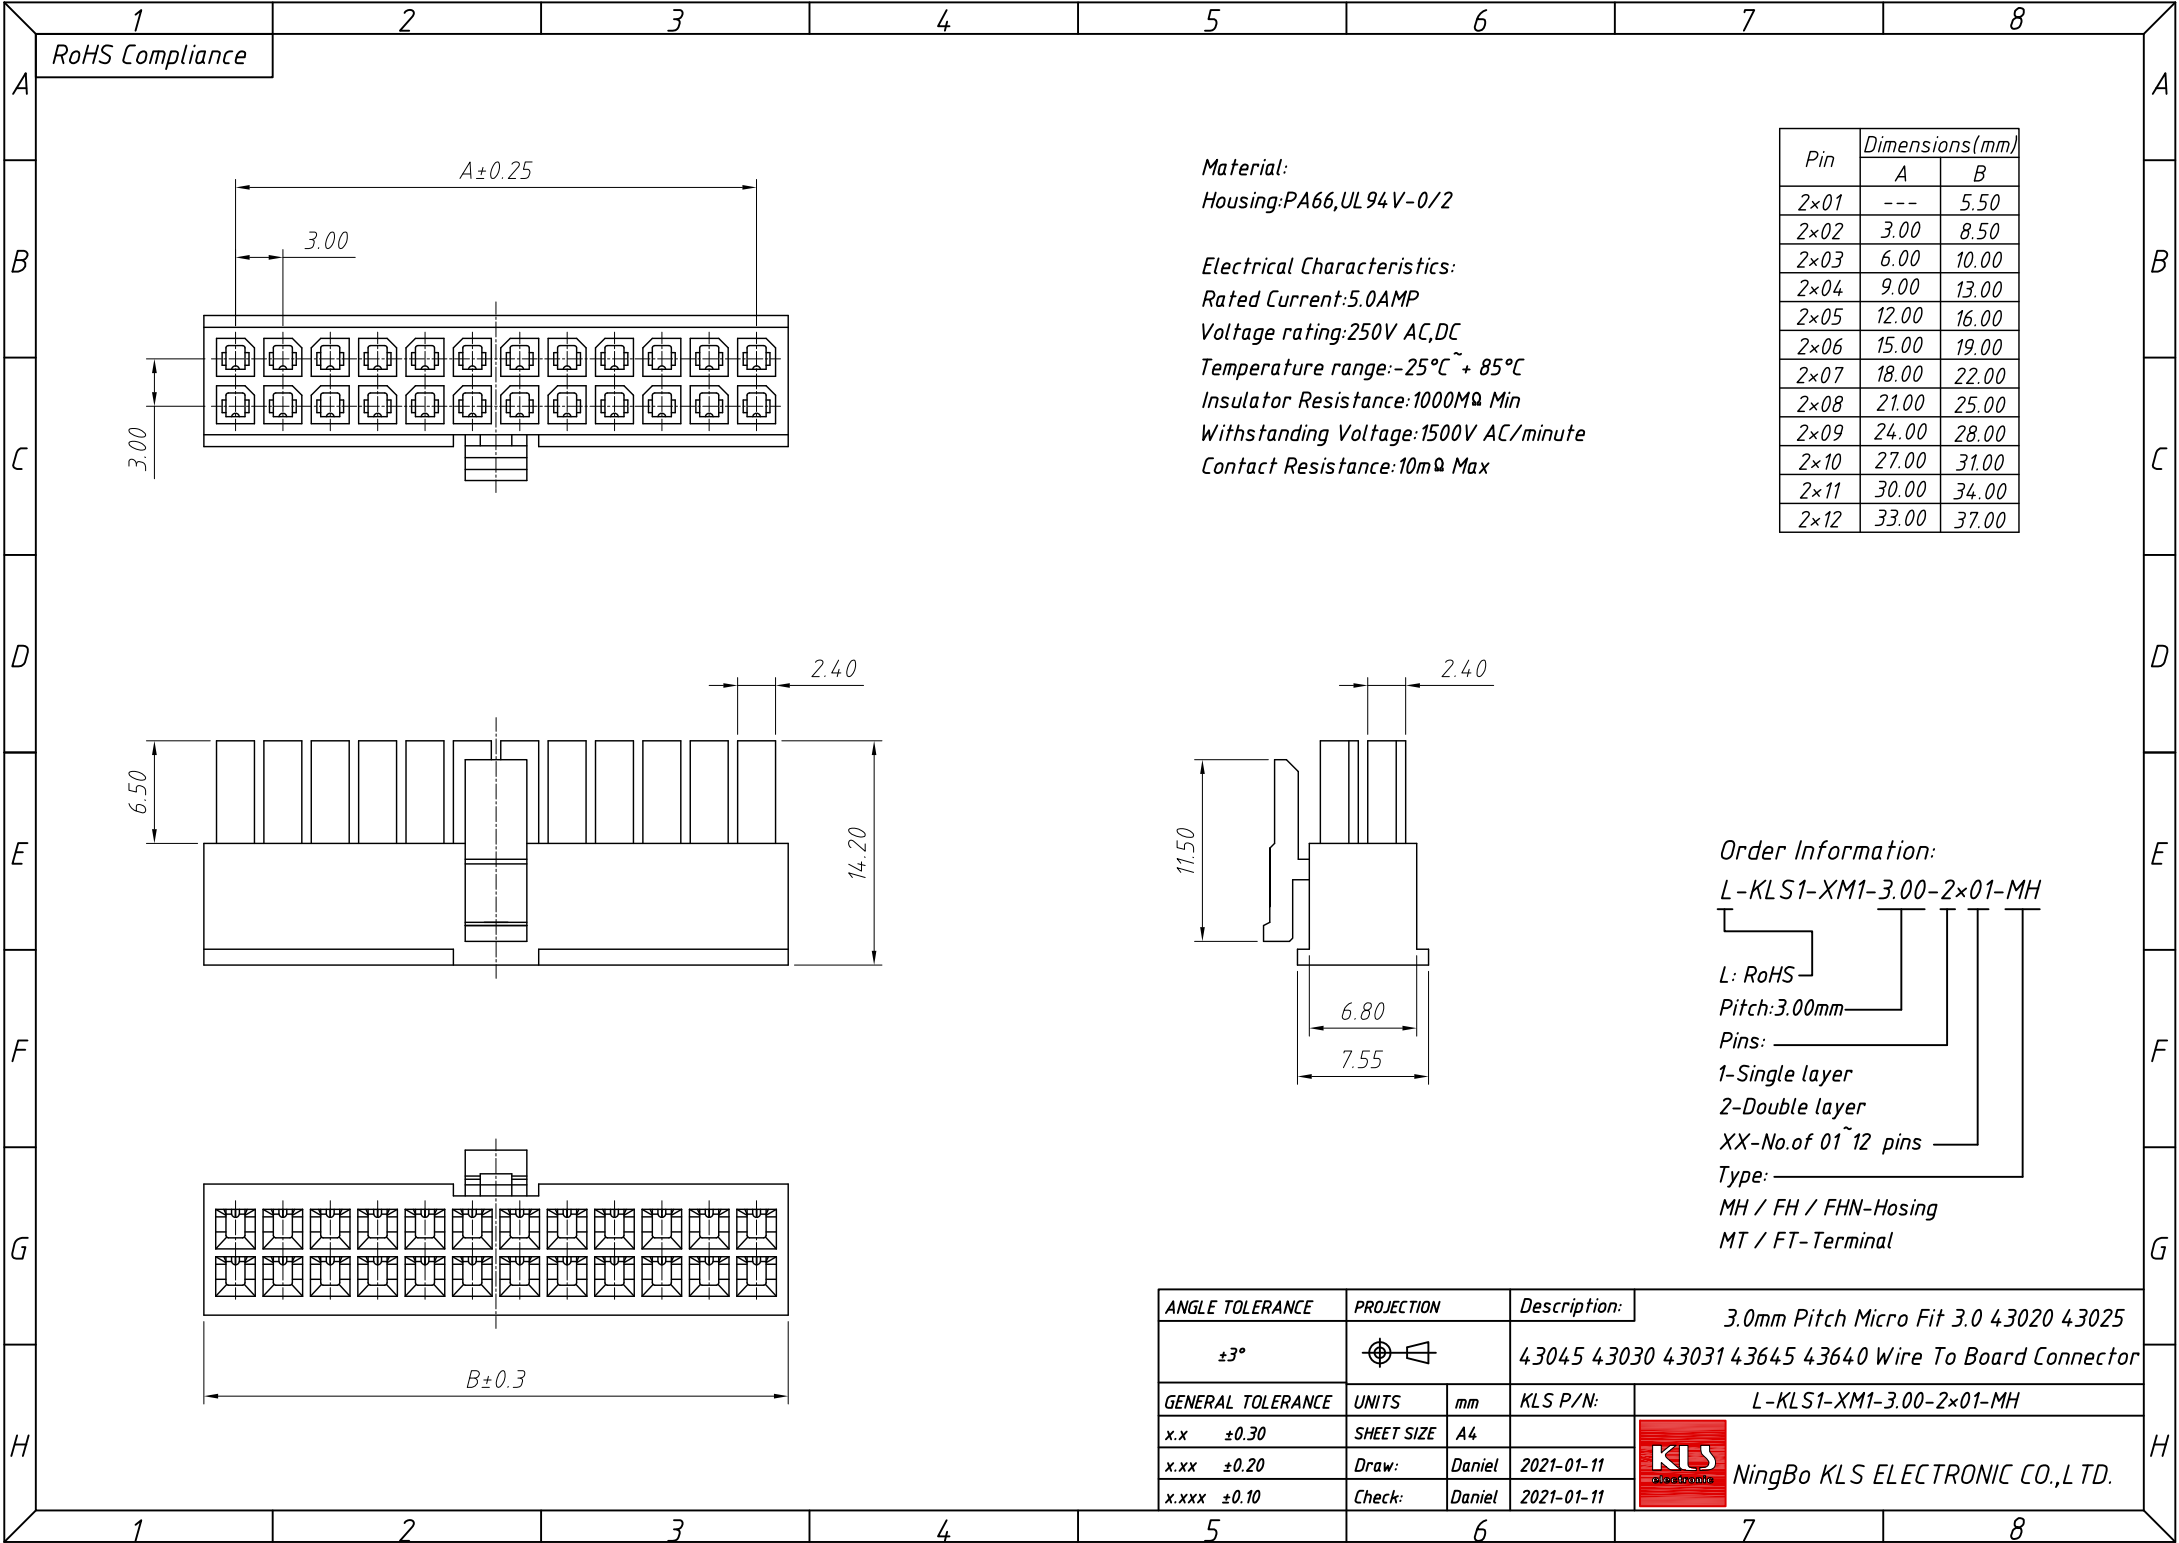

1 RoHS Compliance

2

3

4

5

6

7

8

Material:
Housing:PA66,UL 94 V-0/2

Electrical Characteristics:
Rated Current:5.0AMP
Voltage rating:250V AC,DC
Temperature range:-25°C ~ + 85°C
Insulator Resistance:1000M Ω Min
Withstanding Voltage:1500V AC/minute
Contact Resistance:10m Ω Max

Order Information:
L-KLS1-XM1-3.00-2×01-MH

L: RoHS
Pitch:3.00mm
Pins:
1-Single layer
2-Double layer
XX-No.of 01~12 pins
Type:
MH / FH / FHN-Hosing
MT / FT-Terminal

ANGLE TOLERANCE	PROJECTION	Description:	3.0mm Pitch Micro Fit 3.0 43020 43025
$\pm 3^{\circ}$		43045 43030 43031 43645 43640 Wire To Board Connector	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ± 0.30	SHEET SIZE	A4	L-KLS1-XM1-3.00-2×01-MH
x.xx ± 0.20	Draw:	Daniel	2021-01-11
x.xxx ± 0.10	Check:	Daniel	2021-01-11

NingBo KLS ELECTRONIC CO.,LTD.

H

H

1 2 3 4 5 6 7 8