



140-2010

Snap Bushings




All AVC brand snap bushings are recognized under Components Program of Underwriters Laboratories Inc. except NB-0811 & 0813C, 1216C, 1419C, 1722C.

- Material : Nylon PA 66 (UL 94V-2).
- Color : Black. * Other colors are available upon request.
- These snap bushings convert raw edged holes in metal to smooth, neat insulated ones. They snap and lock into holes with fingertip pressure.
- As described in the diagram, these snap bushings can be applied to panel thicknesses from minimum 0.8 mm to maximum 3.2 mm.

Cat. No.		Mounting Hole		Dimensions				Std. Pkg.
		mm	Inch	A mm	B mm	C mm	H mm	pcs
	NB - 0508	7.8	5/16 "	7.7	9.4	5.2	7.8	1000
	NB - 0609	9.5	3/8 "	9.5	12	6.9	10.1	
	NB - 0811	11	7/16 "	10.9	13.7	8.3	10.3	
	NB - 0813	12.7	1/2 "	12.6	15.1	8.3	10.3	
	NB - 1216	16	5/8 "	15.8	18	12.3	10.4	100
	NB - 1419	19	3/4 "	19	21.8	14.3	11.3	
	NB - 1722	22.2	7/8 "	21.9	25.1	18.6	11.2	
	NB - 1925	25.5	1 "	25	28	19.3	11.2	
	NB - 2430	30.5	1 3/16 "	29.8	34	24.3	11.6	100
	NB - 0813C	12.7	1/2 "	12.7	14.1	8.7	10.1	
	NB - 1216C	16	5/8 "	15.9	17.7	12.3	10.1	
	NB - 1419C	19	3/4 "	19	20.3	14.2	10.3	
	NB - 1722C	22.2	7/8 "	22.2	23.5	17.5	10.3	

140-3010

Hole Plugs

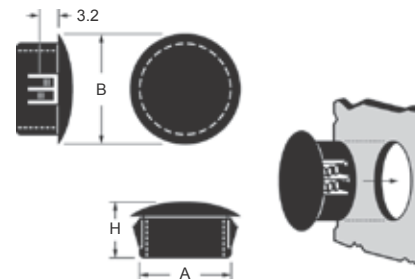

Maximum panel thickness for HP-08 is 1.8 mm and for other items is 3.2 mm.

- Material : Nylon PA 66 (UL 94V-2).
- Color : Black, Greys, White.
- Can be snapped into panel thickness from minimum 0.8 mm to maximum 3.2 mm.
- This hole plug will temporarily close the chassis holes quickly easily and at low cost for reuse whenever the holes are needed again and keep the chassis always clean and neat.

Sizes	Cat. No.				Mounting Hole		Dimensions			Std. Pkg.
	Black RAL 9005	Light Grey RAL 7035	Silver Grey RAL 7001	White RAL 9003	mm	Inch	A mm	B mm	H mm	pcs
HP - 08	B	G	SG	W	7.8	5/16 "	7.8	9.5	7.7	100
HP - 09	B	G	SG	W	9.5	3/8 "	9.4	12	10.2	
HP - 13	B	G	SG	W	12.7	1/2 "	12.5	14.6	10.2	
HP - 16	B	G	SG	W	16	5/8 "	15.7	18.7	10.2	
HP - 19	B	G	SG	W	19	3/4 "	18.8	23.2	10.2	
HP - 22	B	G	SG	W	22	7/8 "	22	25.3	11.2	
HP - 25	B	G	SG	W	25.4	1 "	25	28	11.2	
HP - 30	B	G	SG	W	30.5	1 3/16 "	30.1	34.2	11.2	