

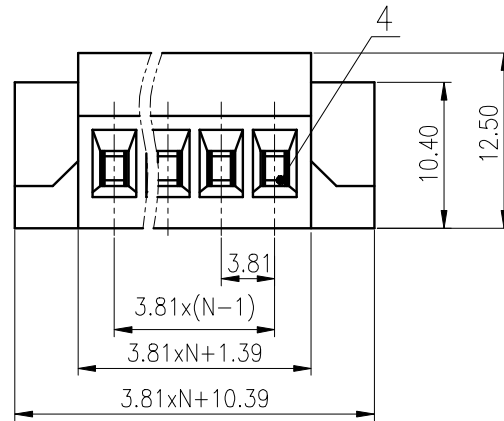
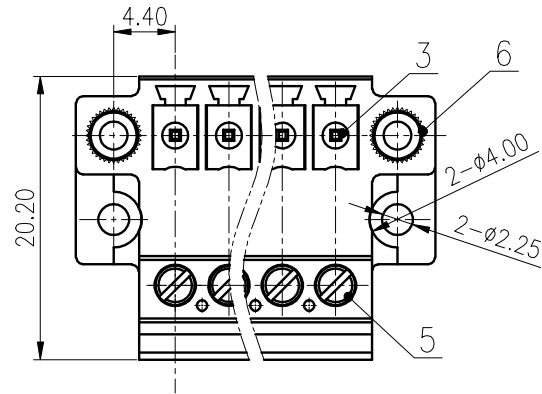




cover and housing
contact by sonic
welding

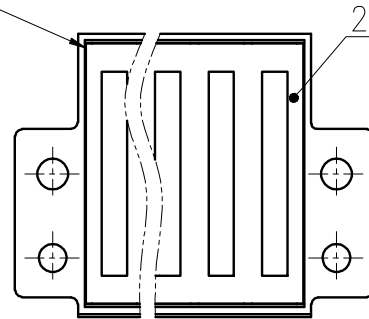

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

6	Cap	Copper alloy	M2.5
5	Screw	Steel	M2/Zn Plated
4	Cage	Copper alloy	Ni Plated
3	Pin	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B
额定电压/电流/Rated Voltage(V)/Current(A)	300/8
IEC 标准/IEC Standard:	
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2
额定电压/电流/Rated Voltage(V)/Current(A)	250/7
工频耐压/Withstanding voltage(V/1Min)	AC2000
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M2, 0.2/1.77
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~1.5/30~14
间距/Pitch(mm)/线数范围/Poles	3.81/N=02~16P
剥线长度/Stripping length(mm)	5~6
使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes

MATERIAL:		SURFACE:	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: Lan ChH 2020.06.10		NAME:	
CHKD: Yu JZh 2020.06.10		15EDG-GBM-3.81-XXP-1Y-00A(H)	
DRFT: Li Zh 2020.06.10		DRAWING NO.: 10002260	
		REV TO	
	SIZE: A4		TYPE: CUSTOMER DRAWING
		SCALE: 2:1	SHEET 1/1