



1
RoHS Compliance

6	7	8
REV	SYM	Revision Record
V0	KLS17048	New Version Release
Appr.	Jenny	Date
		2024-02-23

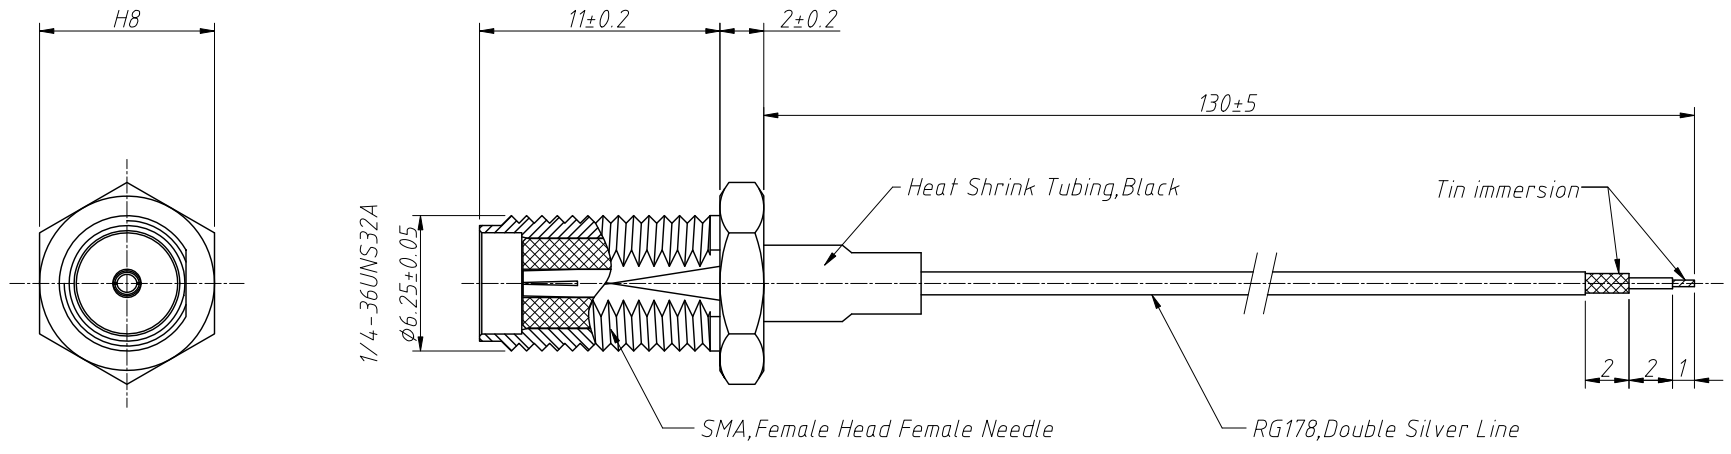

1. Material:
Connector: Brass, Gold Plating
2. Electric:
Frequency Range: 0 ~ 6GHz
Impedance: 50 OHM
Vswr: 1.5 Max
Conduction Impedence: 0.5 ohm
Insulation Resistance: 5000MΩ Min
Power: 10 W Max
Operating Voltage: 335V Max
Mechanical Durability: 500 times
Withstand Voltage: 1000Vrms
Temperature: -35° ~ +80°

Provide Free Gifts:
Nut: Copper Gaskets: Iron Spring: Iron

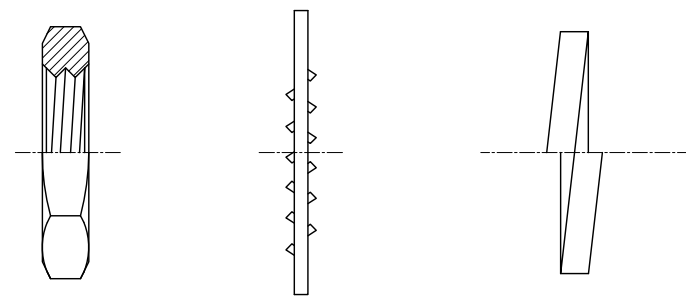

3. The finished product requires 100% electrical testing
4. The product parts must not have scratches, deformation, oil stains or other defects
5. Conduction test requires a voltage withstand of over 500V and must be conducted
6. Salt Spray Test: 48H Min

ANGLE TOLERANCE	PROJECTION	Description:	RG178 Adapter Cable	
±5°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-RFCA21-RG178L130
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Jenny	2024-02-23	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2024-02-23	