


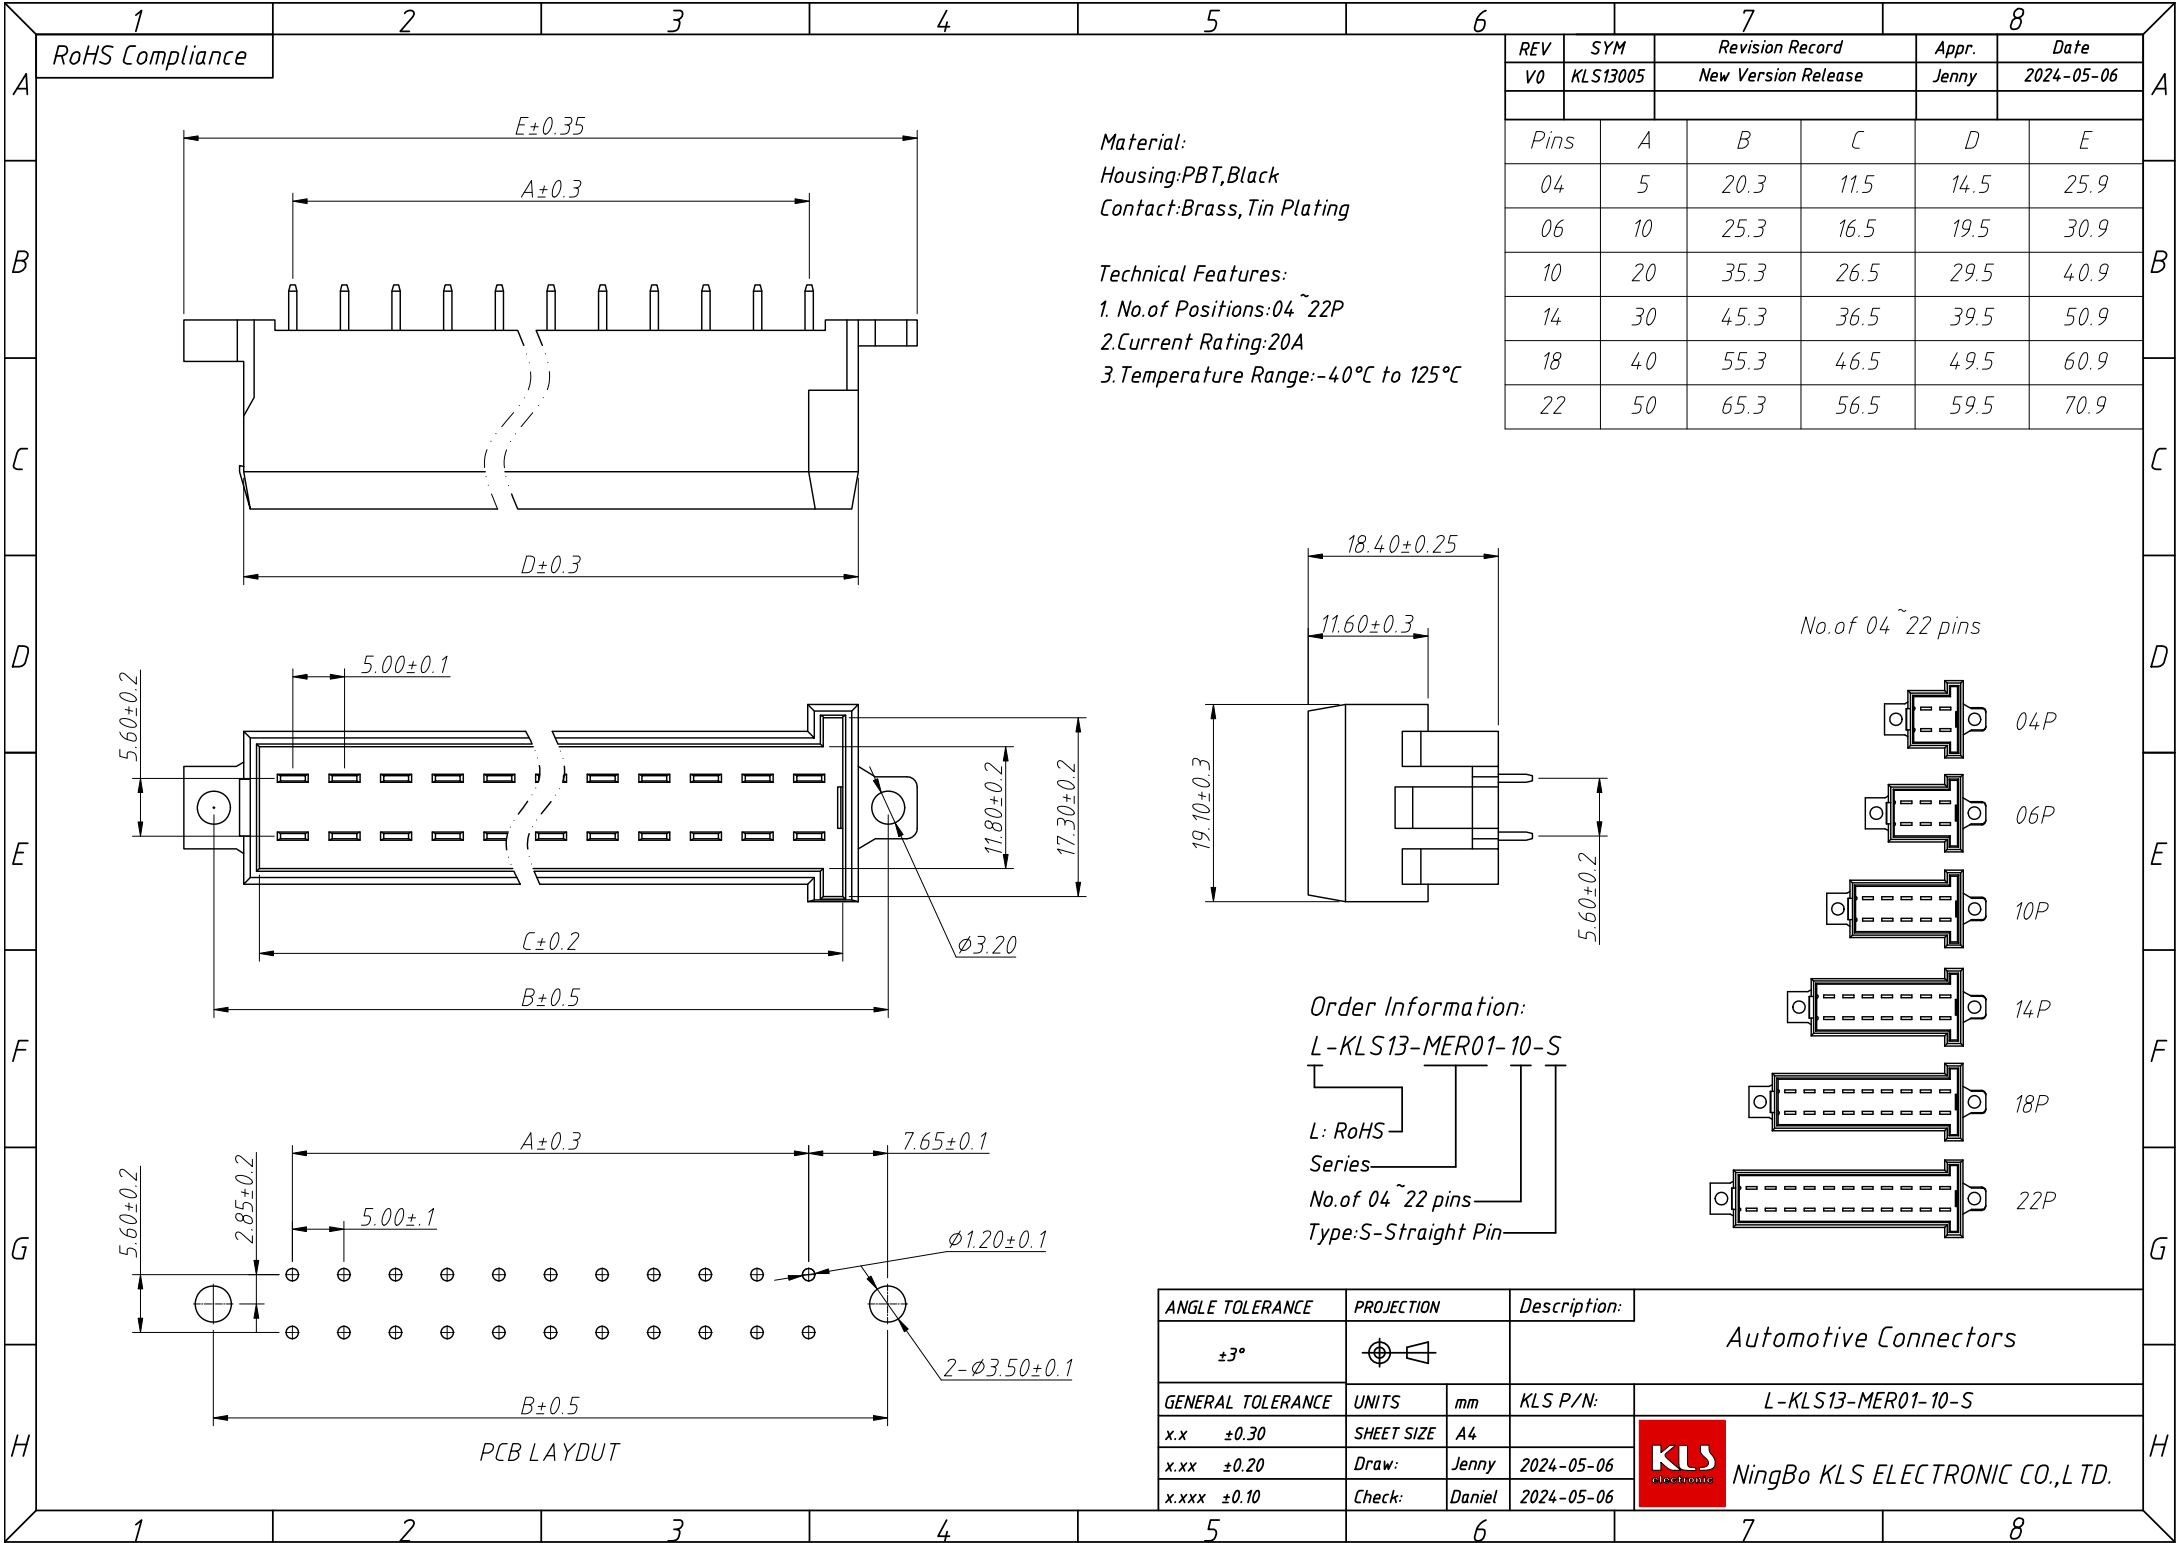

1
RoHS Compliance

2

3

4

5

6


7

8


REV	SYM	Revision Record			Appr.	Date
V0	KLS13005	New Version Release			Jenny	2024-05-06
Pins	A	B	C	D	E	
04	5	20.3	11.5	14.5	25.9	
06	10	25.3	16.5	19.5	30.9	
10	20	35.3	26.5	29.5	40.9	
14	30	45.3	36.5	39.5	50.9	
18	40	55.3	46.5	49.5	60.9	
22	50	65.3	56.5	59.5	70.9	

Material:
Housing:PBT,Black
Contact:Brass,Tin Plating

Technical Features:
1.No.of Positions:04~22P
2.Current Rating:20A
3.Temperature Range:-40°C to 125°C

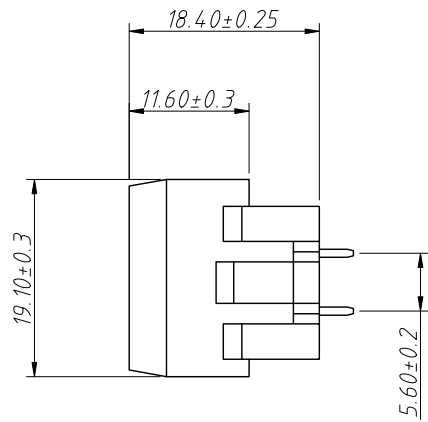

No.of 04 ~ 22 pins

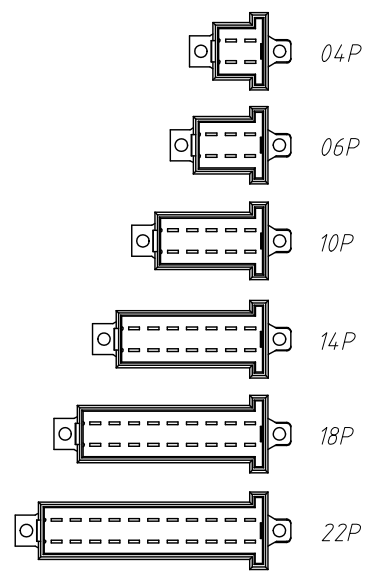

Order Information:
L-KLS13-MER01-10-S
L: RoHS
Series
No.of 04 ~ 22 pins
Type:S-Straight Pin

ANGLE TOLERANCE	PROJECTION	Description:			
$\pm 3^\circ$		Automotive Connectors			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:		
x.x ± 0.30	SHEET SIZE	A4	L-KLS13-MER01-10-S		
x.xx ± 0.20	Draw:	Jenny	2024-05-06	NingBo KLS ELECTRONIC CO.,LTD.	
x.xxx ± 0.10	Check:	Daniel	2024-05-06		

1
RoHS Compliance

2

3

4

5

6

7

8

PCB LAYOUT



NingBo KLS ELECTRONIC CO.,LTD.